




# ENVISION


LINEAR PROFILE EXTRUSIONS

Imagine. Design. Inspire.







P. 4 Surface, Suspended




P. 5 Surface, Suspended




P. 6 Suspended




P. 7 Recessed




P. 8 Recessed




P. 9 Recessed




P. 10 Recessed



P. 11 Recessed










P. 12 Floor Recessed



P. 13 Floor Recessed




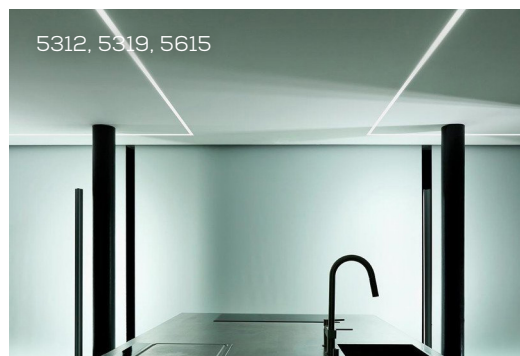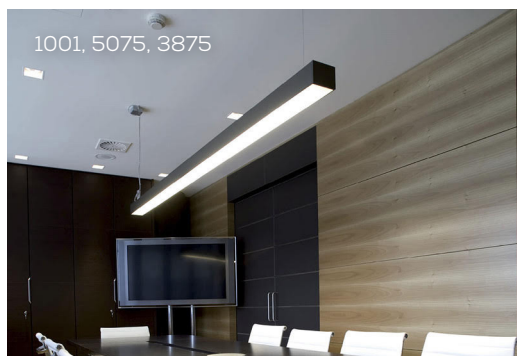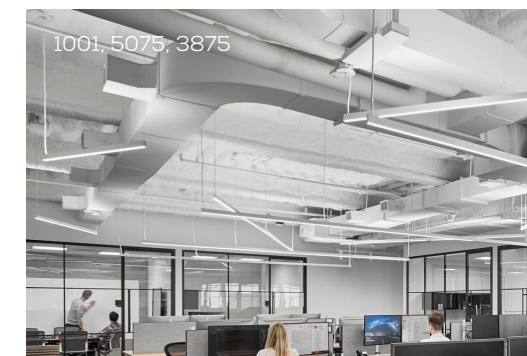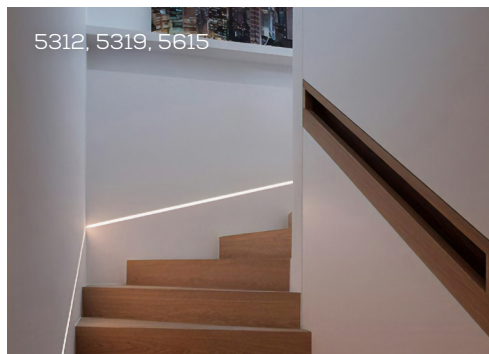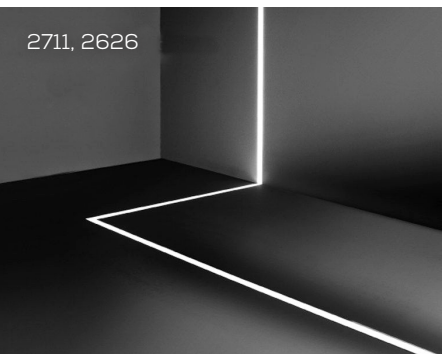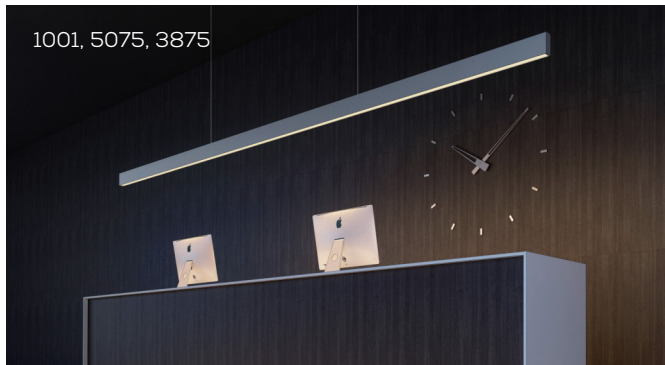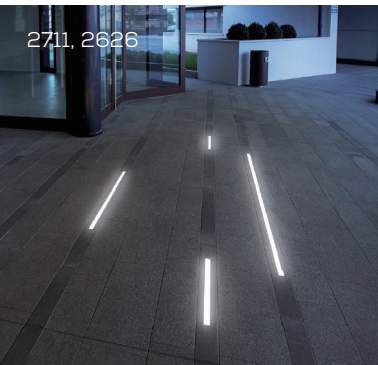




# 1001 PROFILE

## Suspended Series

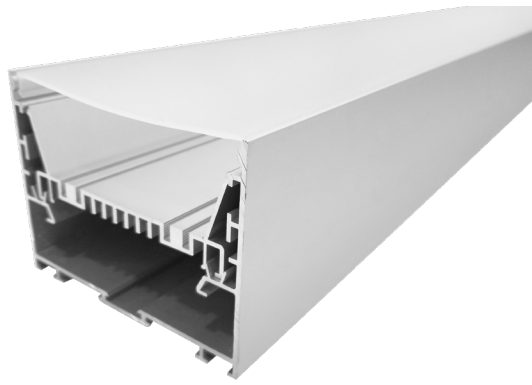

### DIMENSIONS



## A MODERN & ROBUST LUMINAIRE SYSTEM








This large and highly customizable linear system can be suspended or surface mounted, plus has a clean finish without visible screws.

### FEATURES

- Compatible with LED engines up to 68mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



## 1001 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT	PARTS
 <p>▶ <b>1001</b> - Silver</p>	 <p>▶ <b>O</b> - Opaque Lens</p>	 <p>Custom length in segments of 12 to 196 inches.</p>	<p>2,195lm 12.8W/ft</p> <p>▶ <b>27</b> - 2700K</p> <p>▶ <b>30</b> - 3000K</p> <p>▶ <b>40</b> - 4000K</p> <p>▶ <b>50</b> - 5000K</p> <p>▶ <b>60</b> - 6000K</p> <p>CCT - 2700-6500K</p> <p>RGB - RGB</p>	<p>▶ <b>IP20</b> - Dry Areas</p> <p>▶ <b>IP68</b> - Wet Areas</p>	 <p>▶ <b>65W</b> AC100-277V</p> <p>3-in-1 dimming 0-10V, PWM, Rx</p>	<p>▶ <b>D</b> - Surface Mount</p> <p>▶ <b>E</b> - 6.5' Suspension</p>	<p>▶ <b>Z</b> - 180° Connector</p> <p>▶ <b>I</b> - 90° Connector</p> <p>▶ <b>J</b> - X Module</p> <p>▶ <b>K</b> - T Module</p> <p>▶ <b>L</b> - L Module</p>
 <p>▶ <b>RAL N2</b> - Any Color Custom powder coating</p>	 <p>▶ <b>F</b> - Frosted Lens</p>						
	 <p>▶ <b>C</b> - Clear Lens</p>						
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT	PARTS

Mark "N/A" to signify options you do not need.


### ITEM CODES

▶ <b>12502</b> - Linear Extrusion	▶ <b>12652</b> - 65W Driver	▶ <b>12502-K</b> - T Module	▶ <b>12502-D</b> - Surface Mount
▶ <b>12502-G</b> - Gear Tray	▶ <b>12502-F</b> - 180° Connectors	▶ <b>12502-L</b> - L Module	▶ <b>12502-B</b> - Inner Clip Kit
▶ <b>12502-A</b> - End Caps	▶ <b>12502-I</b> - 90° Connectors	▶ <b>12502-E</b> - 6.5' Suspension	▶ <b>12502-C</b> - Safety Cable
▶ <b>12502-H</b> - Frosted Lens	▶ <b>12502-J</b> - X Module	▶ <b>12500-G</b> - Hanging Ring	




# 5075 PROFILE

## Direct & Indirect Series

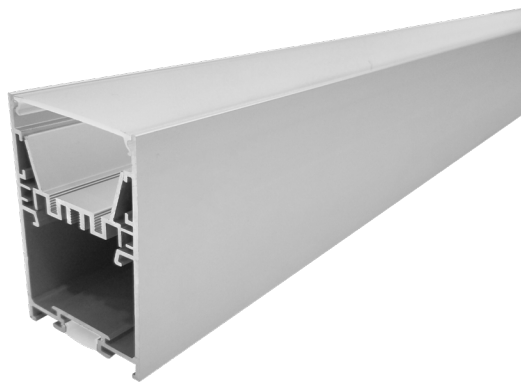

## DIMENSIONS



## TASK LIGHTING WITH AN AMBIENT TOUCH

























You can suspend this fixture to take advantage of the discreet accent light, or surface mount it directly to your ceiling.

### FEATURES

- Compatible with LED engines up to 26mm wide for front, 12mm wide for back.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.





















## 5075 PROFILE ORDERING SHEET

PROFILE	D-LENS	I-LENS	LENGTH	DIRECT	INDIRECT	USAGE	DRIVER	MOUNT	PARTS
			 Custom length in segments of 10 to 196 inches.	1,250lm 7.7W/ft 27 - 2700K 30 - 3000K 40 - 4000K 50 - 5000K 60 - 6000K	655lm 3.8W/ft 27 - 2700K 30 - 3000K 40 - 4000K 50 - 5000K 60 - 6000K	 IP20 - Dry  IP68 - Wet	 23W AC100-277V  44W AC100-277V 3-in-1 dimming 0-10V, PWM, Rx	 D - Surface Mount  E - 6.5' Suspension	 Z - 180° Conn.  I - 90° Conn.  J - X Module  K - T Module  L - L Module
 RAL N2 - Color Custom powder coating	 F - Frosted	 F - Frosted		 CCT - Tunable  RGB - RGB	 CCT - Tunable  RGB - RGB				
 C - Clear	 C - Clear								
PROFILE	D-LENS	I-LENS	LENGTH	D-LIGHT	I-LIGHT	USAGE	DRIVER	MOUNT	PARTS

Mark "N/A" to signify options you do not need.


### ITEM CODES

 12500 - Linear Extrusion	 12651 - 23W Driver	 12500-L - T Module	 12500-D - Surface Mount	 12500-N - 3M Tape
 12500-H - Gear Tray	 12650 - 44W Driver	 12500-M - L Module	 12500-B - Inner Clip Kit	 12500-E - 6.5' Suspension
 12500-A - End Caps	 12500-F - 180° Connectors	 12500-K - X Module	 12500-C - Safety Cable	
 12500-I - Frosted Direct	 12500-O - Frosted Indirect	 12500-J - 90° Connectors	 12500-G - Hanging Ring	




# 3875 PROFILE

Direct & Indirect Series

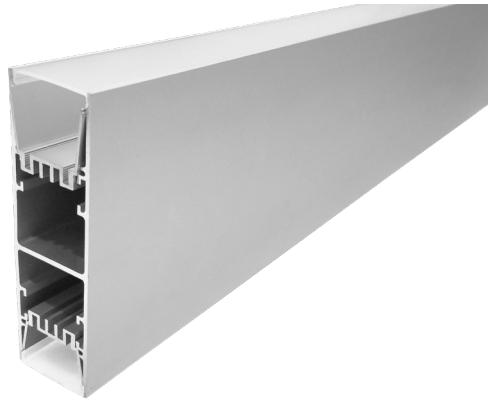

## DIMENSIONS

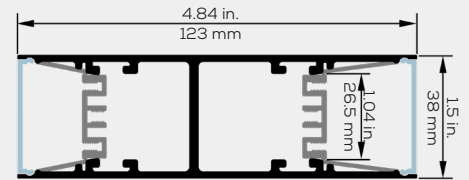


## BALANCED DIRECT & INDIRECT LIGHT







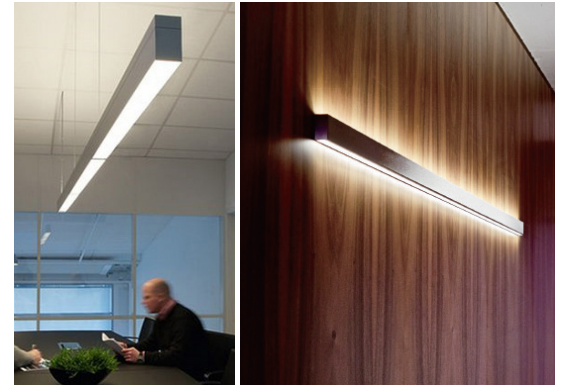


A profile with indirect lighting in mind, this linear fixture is typically suspended for a unique blend of illumination and accent lighting.

### FEATURES

- Compatible with LED engines up to 26mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



















## 3875 PROFILE ORDERING SHEET

PROFILE	D-LENS	I-LENS	LENGTH	DIRECT	INDIRECT	USAGE	DRIVER	MOUNT	PARTS
 ▶ <b>3875</b> - Silver	 ▶ <b>O</b> - Opaque	 ▶ <b>O</b> - Opaque	 Custom length in segments of 10 to 196 inches.	1,250lm 7.7W/ft ▶ <b>27</b> - 2700K ▶ <b>30</b> - 3000K ▶ <b>40</b> - 4000K ▶ <b>50</b> - 5000K ▶ <b>60</b> - 6000K CCT - Tunable RGB - RGB	1,250lm 7.7W/ft ▶ <b>27</b> - 2700K ▶ <b>30</b> - 3000K ▶ <b>40</b> - 4000K ▶ <b>50</b> - 5000K ▶ <b>60</b> - 6000K CCT - Tunable RGB - RGB	▶ <b>IP20</b> - Dry ▶ <b>IP68</b> - Wet	▶ <b>23W</b> AC100-277V ▶ <b>44W</b> AC100-277V 3-in-1 dimming 0-10V, PWM, Rx	▶ <b>D</b> - 6.5' Suspension	▶ <b>Z</b> - 180° Conn. ▶ <b>I</b> - 90° Conn. ▶ <b>J</b> - X Module ▶ <b>K</b> - T Module ▶ <b>L</b> - L Module
 ▶ <b>RAL №</b> - Color Custom powder coating	 ▶ <b>F</b> - Frosted	 ▶ <b>F</b> - Frosted							
	 ▶ <b>C</b> - Clear	 ▶ <b>C</b> - Clear							
PROFILE	D-LENS	I-LENS	LENGTH	D-LIGHT	I-LIGHT	USAGE	DRIVER	MOUNT	PARTS

Mark "N/A" to signify options you do not need.


### ITEM CODES

 <b>12501</b> - Linear Extrusion	 <b>12501-H</b> - Frosted Lens	 <b>12501-K</b> - T Module	 <b>12501-D</b> - 6.5' Suspension
 <b>12501-F</b> - Direct Gear Tray	 <b>12651</b> - 23W Driver	 <b>12501-L</b> - L Module	 <b>12500-G</b> - Hanging Ring
 <b>12501-G</b> - Indirect Gear Tray	 <b>12650</b> - 44W Driver	 <b>12501-E</b> - 180° Connectors	 <b>12501-B</b> - Inner Clip Kit
 <b>12501-A</b> - End Caps	 <b>12501-J</b> - X Module	 <b>12501-I</b> - 90° Connectors	 <b>12501-C</b> - Safety Cable




# 7532 PROFILE

Recessed Series

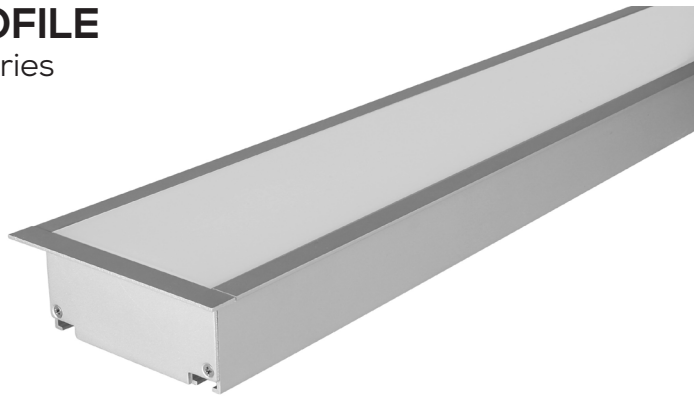

## DIMENSIONS

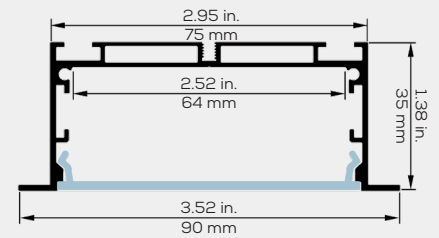

## A SLIM EXTRUSION FOR TIGHT SPACES
















This light is ideal for embedding in ceilings or walls with easy-to-install tension clips and a narrow trim to frame the lens face.

### FEATURES

- Compatible with LED engines up to 64mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



## 7532 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT
 <p>► <b>7532</b> - Silver</p>	 <p>► <b>O</b> - Opaque Lens</p>	 <p>Custom length in segments of 8 to 196 inches.</p>	<p>1,850lm 11W/ft</p> <p>► <b>27</b> - 2700K</p> <p>► <b>30</b> - 3000K</p> <p>► <b>40</b> - 4000K</p> <p>► <b>50</b> - 5000K</p> <p>► <b>60</b> - 6000K</p> <p>CCT - 2700-6500K</p> <p>RGB - RGB</p>	<p>► <b>IP20</b> - Dry Areas</p> <p>► <b>IP68</b> - Wet Areas</p>	 <p>► <b>69W</b> AC100-240V</p> <p>3-in-1 dimming 0-10V, PWM, Resistance</p>	 <p>► <b>B</b> - Spring Clips</p>
 <p>► <b>RAL N2</b> - Any Color Custom powder coating</p>	 <p>► <b>F</b> - Frosted Lens</p>					
	 <p>► <b>C</b> - Clear Lens</p>					
 <p>PROFILE</p>	 <p>LENS</p>	 <p>LENGTH</p>	 <p>LIGHT</p>	 <p>USAGE</p>	 <p>DRIVER</p>	 <p>MOUNT</p>

Mark "N/A" to signify options you do not need.

### ITEM CODES

- **12509** - Linear Extrusion
- **12509-A** - End Caps
- **12509-C** - Frosted Lens
- **12653** - 69W Driver
- **12509-B** - Spring Clip Set
- **12500-N** - 3M Tape




# 5032 PROFILE

Recessed Series



## DIMENSIONS

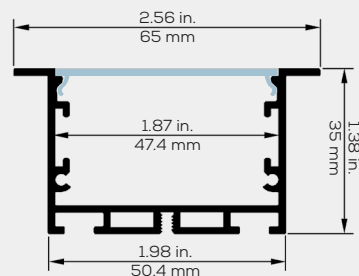

## SHED LIGHT WITH A BOLD LINEAR PROFILE







This profile maximizes illumination and provides sufficient task lighting even when recessed in very high ceilings.

### FEATURES

- Compatible with LED engines up to 42mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



## 5032 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT	PARTS
 <p>► <b>5032</b> - Silver</p>	 <p>► <b>O</b> - Opaque Lens</p>	 <p>Custom length in segments of 8 to 196 inches.</p>	<p>1,520lm 11W/ft</p> <p>► <b>27</b> - 2700K</p> <p>► <b>30</b> - 3000K</p> <p>► <b>40</b> - 4000K</p> <p>► <b>50</b> - 5000K</p> <p>► <b>60</b> - 6000K</p> <p>730lm 8.6W/ft</p> <p>► <b>CCT</b> - 2700-6500K</p> <p>► <b>RGB</b> - RGB</p>	<p>► <b>IP20</b> - Dry Areas</p> <p>► <b>IP68</b> - Wet Areas</p>	<p>► <b>30W</b> AC120-277V</p> <p>► <b>60W</b> AC120-277V</p> <p>► <b>96W</b> AC120-277V</p> <p>5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer</p>	<p>► <b>B</b> - Spring Clip Set</p>	<p>► <b>Z</b> - 180° Connector</p>
 <p>► <b>RAL N2</b> - Any Color Custom powder coating</p>	 <p>► <b>F</b> - Frosted Lens</p>						
	 <p>► <b>C</b> - Clear Lens</p>						
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT	PARTS

Mark "N/A" to signify options you do not need.


### ITEM CODES

► <b>12503</b> - Linear Extrusion	► <b>40662-A</b> - 30W Driver	► <b>12503-B</b> - Spring Clip Set
► <b>12503-A</b> - End Caps	► <b>40662-B</b> - 60W Driver	
► <b>12503-D</b> - Frosted Lens	► <b>40662-C</b> - 96W Driver	
► <b>40662-F</b> - CCT Remote	► <b>12503-C</b> - 180° Connectors	




# 5319 PROFILE

Recessed Series

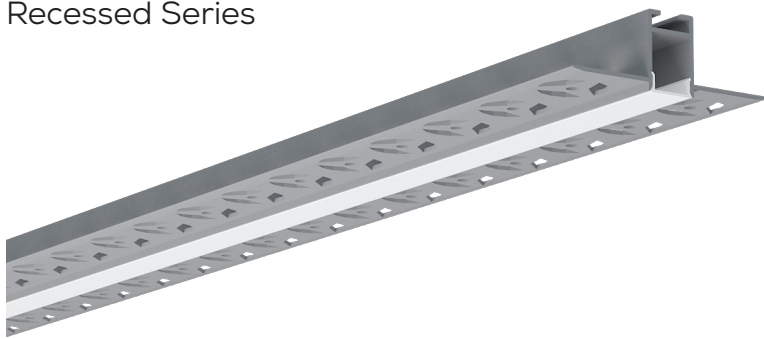

## DIMENSIONS

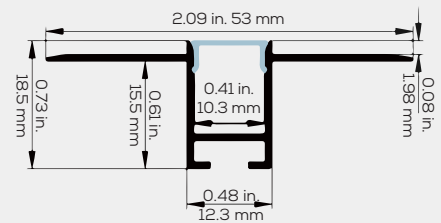


## THE STANDARD RECESSED LIGHT SYSTEM







A profile that sets the standard when it comes to an embedded linear wall or ceiling light for any commercial or residential space.
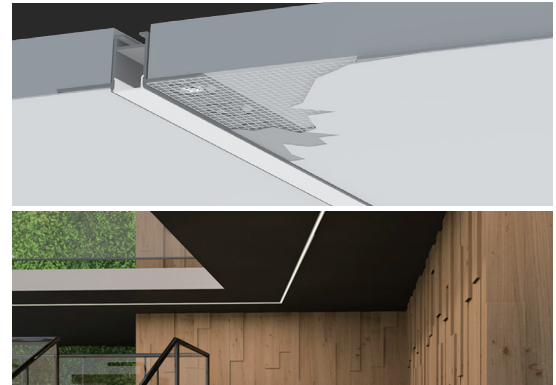
### FEATURES

- Compatible with LED engines up to 10mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.



## 5319 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 <p>► <b>5319</b> - Silver</p>	 <p>► <b>O</b> - Opaque Lens</p>	 <p>Custom length in segments of 2 to 196 inches.</p>	<p>760lm 5.5W/ft</p> <p>► <b>27</b> - 2700K</p> <p>► <b>30</b> - 3000K</p> <p>► <b>40</b> - 4000K</p> <p>► <b>50</b> - 5000K</p> <p>► <b>60</b> - 6000K</p> <p>365lm 4.3W/ft</p> <p>► <b>CCT</b> - 2700-6500K</p> <p>► <b>RGB</b> - RGB</p>	<p>► <b>IP20</b> - Dry Areas</p> <p>► <b>IP68</b> - Wet Areas</p>	<p>► <b>30W</b> AC120-277V</p> <p>► <b>60W</b> AC120-277V</p> <p>► <b>96W</b> AC120-277V</p> <p>5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer</p>
 <p>► <b>RAL N2</b> - Any Color Custom powder coating</p>	 <p>► <b>F</b> - Frosted Lens</p>				
	 <p>► <b>C</b> - Clear Lens</p>				
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER

Mark "N/A" to signify options you do not need.

### ITEM CODES

► <b>12506</b> - Linear Extrusion	► <b>40662-A</b> - 30W Driver
► <b>12506-A</b> - End Caps	► <b>40662-B</b> - 60W Driver
► <b>12506-B</b> - Frosted Lens	► <b>40662-C</b> - 96W Driver
► <b>40662-F</b> - CCT Remote	




# 5615 PROFILE

Recessed Series



## DIMENSIONS

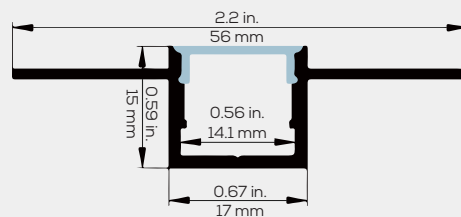


## A RECESSED PROFILE FOR WIDER ENGINES





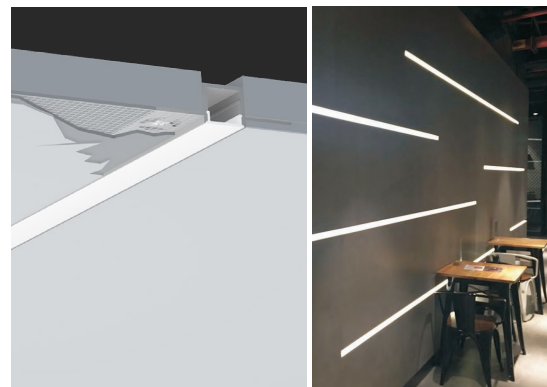

This extrusion has the internal space to accommodate more light source options than the other recessed profiles in this series.

### FEATURES

- Compatible with LED engines up to 14mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.



## 5615 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 <p>► <b>5615</b> - Silver</p>	 <p>► <b>O</b> - Opaque Lens</p>	 <p>Custom length in segments of 2 to 196 inches.</p>	<p>760lm 5.5W/ft</p> <p>► <b>27</b> - 2700K</p> <p>► <b>30</b> - 3000K</p> <p>► <b>40</b> - 4000K</p> <p>► <b>50</b> - 5000K</p> <p>► <b>60</b> - 6000K</p> <p>365lm 4.3W/ft</p> <p>► <b>CCT</b> - 2700-6500K</p> <p>► <b>RGB</b> - RGB</p>	<p>► <b>IP20</b> - Dry Areas</p> <p>► <b>IP68</b> - Wet Areas</p>	<p>► <b>30W</b> AC120-277V</p> <p>► <b>60W</b> AC120-277V</p> <p>► <b>96W</b> AC120-277V</p> <p>5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer</p>
 <p><b>RAL N2</b> - Any Color Custom powder coating</p>	 <p>► <b>F</b> - Frosted Lens</p>				
	 <p><b>C</b> - Clear Lens</p>				
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER

Mark "N/A" to signify options you do not need.


### ITEM CODES

- |                                   |                               |
|-----------------------------------|-------------------------------|
| ► <b>12508</b> - Linear Extrusion | ► <b>40662-A</b> - 30W Driver |
| ► <b>12508-A</b> - End Caps       | ► <b>40662-B</b> - 60W Driver |
| ► <b>12508-B</b> - Frosted Lens   | ► <b>40662-C</b> - 96W Driver |
| ► <b>40662-F</b> - CCT Remote     |                               |




# 5312 PROFILE

Recessed Series

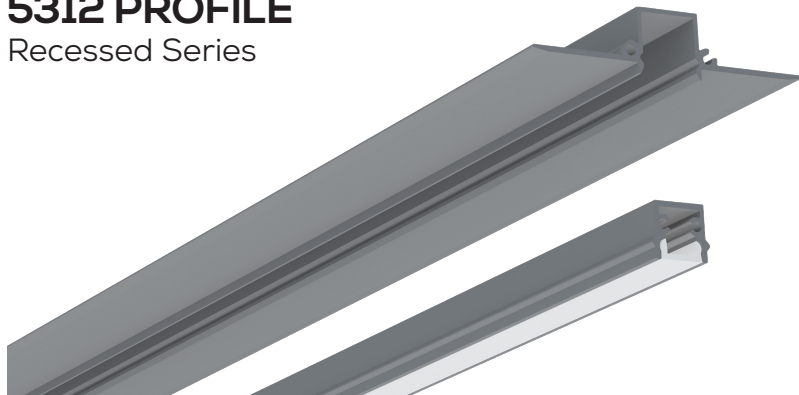

## DIMENSIONS

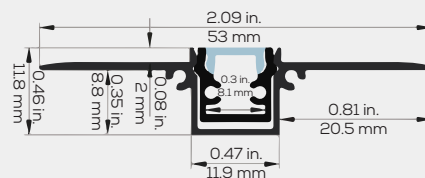

## A DOUBLE PROFILE FOR EASY INSTALLATION







Once the main extrusion is installed into your surface, the separate interior channel can be placed inside after the dust has settled.

### FEATURES

- Compatible with LED engines up to 6mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.



## 5312 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 <p>► <b>5312</b> - Silver</p>	 <p>► <b>O</b> - Opaque Lens</p>	 <p>Custom length in segments of 2 to 196 inches.</p>	<p>175lm 2.2W/ft</p> <p>► <b>27</b> - 2700K</p> <p>► <b>30</b> - 3000K</p> <p>► <b>40</b> - 4000K</p> <p>► <b>50</b> - 5000K</p> <p>► <b>60</b> - 6000K</p> <p>► <b>CCT</b> - 2700-6500K</p> <p>► <b>RGB</b> - RGB</p>	<p>► <b>IP20</b> - Dry Areas</p> <p>► <b>IP68</b> - Wet Areas</p>	<p>► <b>30W</b> AC120-277V</p> <p>► <b>60W</b> AC120-277V</p> <p>► <b>96W</b> AC120-277V</p> <p>5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer</p>
 <p>► <b>RAL N2</b> - Any Color Custom powder coating</p>	 <p>► <b>F</b> - Frosted Lens</p>				
	 <p>► <b>C</b> - Clear Lens</p>				
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER

Mark "N/A" to signify options you do not need.


### ITEM CODES

- |                                   |                               |
|-----------------------------------|-------------------------------|
| ► <b>12507</b> - Linear Extrusion | ► <b>40662-A</b> - 30W Driver |
| ► <b>12507-B</b> - Gear Tray      | ► <b>40662-B</b> - 60W Driver |
| ► <b>12507-A</b> - End Caps       | ► <b>40662-C</b> - 96W Driver |
| ► <b>12507-C</b> - Frosted Lens   |                               |




## 2626 PROFILE

### Floor Recessed Series

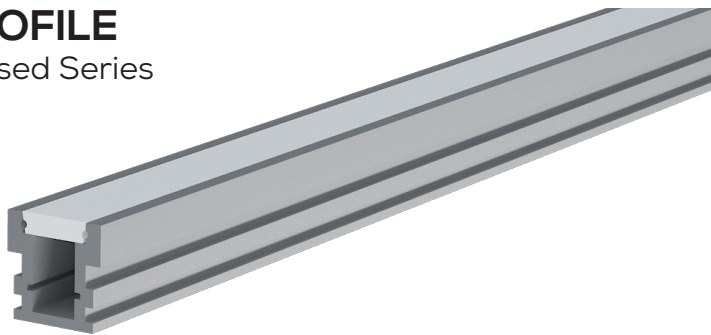

## DIMENSIONS





## A DURABLE EMBEDDED FLOOR LIGHT








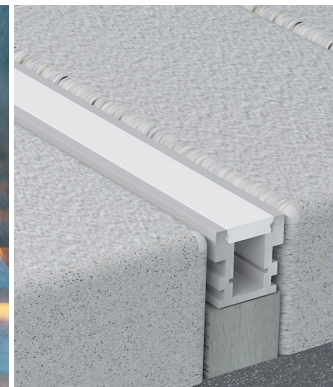
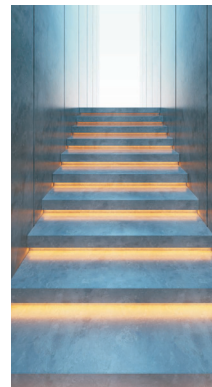















This profile is flush to the ground and designed to withstand the pressure and impact of equipment passing on top of it.

### FEATURES

- Compatible with LED engines up to 11mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.










## 2626 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 <b>2626</b> - Silver	 <b>O</b> - Opaque Lens	 Custom length in segments of 2 to 196 inches.	760lm 5.5W/ft  <b>27</b> - 2700K  <b>30</b> - 3000K  <b>40</b> - 4000K  <b>50</b> - 5000K  <b>60</b> - 6000K  365lm 4.3W/ft  <b>CCT</b> - 2700-6500K  <b>RGB</b> - RGB	 <b>IP20</b> - Dry Areas  <b>IP68</b> - Wet Areas	 <b>30W</b> AC120-277V   <b>60W</b> AC120-277V   <b>96W</b> AC120-277V 5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer
 <b>RAL N2</b> - Any Color Custom powder coating	 <b>F</b> - Frosted Lens				
	 <b>C</b> - Clear Lens				
 PROFILE	 LENS	 LENGTH	 LIGHT	 USAGE	 DRIVER

Mark "N/A" to signify options you do not need.


### ITEM CODES

 <b>12505</b> - Linear Extrusion	 <b>40662-A</b> - 30W Driver
 <b>12505-A</b> - End Caps	 <b>40662-B</b> - 60W Driver
 <b>12505-B</b> - Frosted Lens	 <b>40662-C</b> - 96W Driver
 <b>40662-F</b> - CCT Remote	




## 2711 PROFILE

### Floor Recessed Series

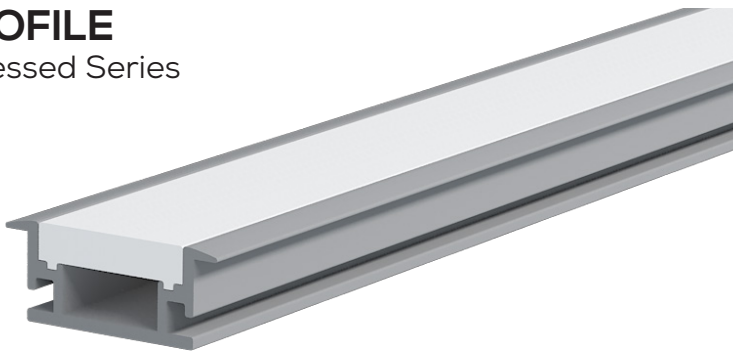

## DIMENSIONS



## A RAISED FLOOR LIGHT WITH EASE IN MIND








Meant to be easily embedded in the floor, this light is sturdy with a raised and beveled trim around its face.

### FEATURES

- Compatible with LED engines up to 12mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.











## 2711 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT
 <p>► <b>2711</b> - Silver</p>	 <p>► <b>O</b> - Opaque Lens</p>	 <p>Custom length in segments of 2 to 196 inches.</p>	<p>760lm 5.5W/ft</p> <p>► <b>27</b> - 2700K</p> <p>► <b>30</b> - 3000K</p> <p>► <b>40</b> - 4000K</p> <p>► <b>50</b> - 5000K</p> <p>► <b>60</b> - 6000K</p> <p>365lm 4.3W/ft</p> <p>► <b>CCT</b> - 2700-6500K</p> <p>► <b>RGB</b> - RGB</p>	<p>► <b>IP20</b> - Dry Areas</p> <p>► <b>IP68</b> - Wet Areas Single CCT: 370lm 4.4W/ft</p>	<p>► <b>30W</b> AC120-277V</p> <p>► <b>60W</b> AC120-277V</p> <p>► <b>96W</b> AC120-277V</p> <p>5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer</p>	 <p>► <b>D</b> - Mounting Clip</p>
 <p><b>RAL N2</b> - Any Color Custom powder coating</p>	 <p>► <b>F</b> - Frosted Lens</p>					
	 <p><b>C</b> - Clear Lens</p>					
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT

Mark "N/A" to signify options you do not need.

### ITEM CODES

 <b>12510</b> - Linear Extrusion	 <b>40662-A</b> - 30W Driver
 <b>12510-A</b> - End Caps	 <b>40662-B</b> - 60W Driver
 <b>12510-B</b> - Frosted Lens	 <b>40662-C</b> - 96W Driver
 <b>40662-F</b> - CCT Remote	 <b>12510-C</b> - Mounting Clip



---

---

---

---

Draw your dream fixture below and let us make it a reality.







Authorized Distributor

☎ 702 384-6407

🏢 702 384-6346

✉ CLS@lightingspecialtieslv.com

🌐 www.lightingspecialtieslv.com

