

Premium Quality LED Lighting

2021

Catalog







MEET SARIN

We Make High Quality Lights That You Can Count On

SARIN Energy Solutions is a Kansas City-based company that provides efficient LED lighting fixtures—backed by extensive warranties—all across the Midwest. We manufacture commercial-grade LED lights at the highest standard so you can rely on them for years to come.

Our items have been age tested and certified to give you absolute peace of mind. Most of our products use Philips LED chips and MEAN WELL drivers. They are crafted with durable materials in a variety of finishes.

Our Mission

Our goal is to provide the best customer service to every client, every time. We have hundreds of carefully-built lighting fixtures that are designed to last and ensure your utmost satisfaction. You can be confident in your investment with SARIN products.

*Commercial
Lighting Specialties*
Authorized Distributor
702 384-6407

TABLE OF CONTENTS

LED Lighting by Category

VANITY LIGHTS	4-9
PENDANT LIGHTS	10-18
CEILING LIGHTS	20-27
TROFFERS & PANELS	28-35
LINEAR & TUBE LIGHTS	36-44
M ³ INSPIRATION SERIES	45
INDOOR LAMPS	46-49
HIGH BAY LIGHTS	50-53
EXIT & EMERGENCY	54-58
ENVISION LINEAR PROFILES	59
CHANNEL & STRIP LIGHTS	60-65
SPECIALTY LIGHTS	66-70
MIRAGE OPTICAL TILES	71
EMBER 3D SURFACES	72
WALL LAMPS	74-87
WALL PACKS	88-93
FLOOD & POLE LIGHTS	94-109
SOLAR LIGHTS	110-113
CANOPY & GAS SIGNS	114-119
HIGH POWER LAMPS	120-123
LANDSCAPE LIGHTS	124-131
COLOSSAL SCENCE LIGHTING	132



INTERIOR LIGHTING



Reinvent Your Space with Cutting-Edge LEDs

At SARIN Energy, we take pride in our high-quality and elegant LED lights. With so many design possibilities, you can create the atmosphere to delight anyone's sense of style and taste. The ability to reduce utility bills and achieve significant energy savings is just a bonus. Show off your sophistication with luxury fixtures that truly elevate your decor.

Our interior products have superior light distribution and versatility for a multitude of applications, from accent to illumination. In addition to the savings from switching to energy-efficient LEDs, you can also benefit from noticeable reductions in maintenance costs over the life of the system. LED technology lasts 4 to 8 times longer than modern incandescent or CFL lights.

We are dedicated to ensuring that your lighting needs are met. Nearly all of our lights are available in color temperatures ranging from 2700-6500K. Many of our products can be custom ordered with various sizes, colors, wattages, accessories, diffusers, finishes, and features. For more information about optional customizations, call us at [855-997-2746](tel:855-997-2746).

LED VANITY LIGHTS

SARIN's LED Vanity Lights feature quality grade materials and diffusers which are elegant and have minimum glare. These lights are safe for indoor use in damp locations that do not come in contact with water.

Applications:

- Homes
- Offices
- Hotels
- Restaurants

Bulbs are sold separately for fixtures that require them.



[▲ Return to Table of Contents](#)



SES-ML01-3636-20-B-T




Bond Series



CCT Mirror Light, 3x3 ft - 54W

Watts:	54W
Lumens:	6,800lm
CCT Switch:	3000K, 4000K, 5000K, 6000K
Voltage:	AC100 - 240V
Dimmable:	Touch
IP Rating:	IP42
Materials:	Aluminum, Steel
Finish:	White, Frosted
Lifespan:	50,000 hours



#10675
Crystal

#10677
Frosted

On/Off & Anti-Fog

Custom Shapes & Sizes Available

SES-ML01-4836-20-B-T




Bond Series



CCT Mirror Light, 3x4 ft - 67W

Watts:	67W
Lumens:	8,000lm
CCT Switch:	3000K, 4000K, 5000K, 6000K
Voltage:	AC100 - 240V
Dimmable:	Touch
IP Rating:	IP42
Materials:	Aluminum, Steel
Finish:	White, Frosted
Lifespan:	50,000 hours



#10676
Crystal

#10678
Frosted

On/Off & Anti-Fog

Custom Shapes & Sizes Available

SES-MLOVAL-3040-CCT




Bond Series



CCT Oval Mirror Light - 48W

Watts:	48W
Lumens:	5,760lm
CCT Switch:	3000K, 4000K, 5000K, 6000K
Voltage:	AC100 - 240V
Dimmable:	Touch
IP Rating:	IP42
Materials:	Aluminum, Steel
Finish:	White, Crystal
Lifespan:	50,000 hours



#10674
Crystal

On/Off & Anti-Fog

Custom Shapes & Sizes Available

SES-WS412-15-XXXX




Sloane Series



Chrome Vanity, WS412 - 14W

Watts:	14W
Lumens:	1,200lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Metal, Glass
Finish:	Chrome, Frosted
Lifespan:	50,000 hours



#10683
5000K

#10684
3000K

Optional: Finish Color, 30W

SES-V432-40-XXXX




Sloane Series



Chrome Vanity, V432 - 32W

Watts:	32W
Lumens:	3,000lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Metal, Glass
Finish:	Chrome, Frosted
Lifespan:	50,000 hours




#10685
5000K

#10686
3000K

Optional: Finish Color

SES-WS881-8-XXXX




Sloane Series



Chrome Vanity, WS881 - 3W

Watts:	3W
Lumens:	350lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Metal, Glass
Finish:	Chrome, Seedy
Lifespan:	50,000 hours



#10695
5000K

#10696
3000K

Optional: Finish Color, 6W, 9W

SES-V122-15-XXXX




Sloane Series



Chrome Vanity, V122 - 14W

Watts:	14W
Lumens:	1,200lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Metal, Glass
Finish:	Chrome, Frosted
Lifespan:	50,000 hours

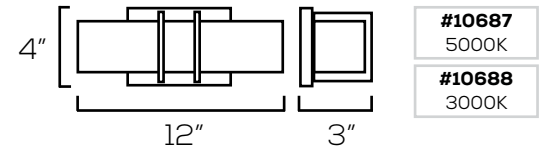

Optional: Finish Color, 15W, 30W, 40W

SES-V32-40-XXXX




Sloane Series



Chrome Vanity, V32 - 39W

Watts:	39W
Lumens:	3,200lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Metal, Glass
Finish:	Chrome, Frosted
Lifespan:	50,000 hours



Optional: Finish Color, 15W, 30W, 40W

SES-V881-24-XXXX




Sloane Series



Chrome Vanity, V881 - 9W

Watts:	9W
Lumens:	1,000lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Metal, Glass
Finish:	Chrome, Seedy
Lifespan:	50,000 hours



Optional: Finish Color, 3W, 6W

SES-V712-10-XXXX




Sloane
Series



Chrome Vanity, V712 - 14W

Watts:	14W
Lumens:	1,200lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Metal, Glass
Finish:	Chrome, Rods
Lifespan:	50,000 hours

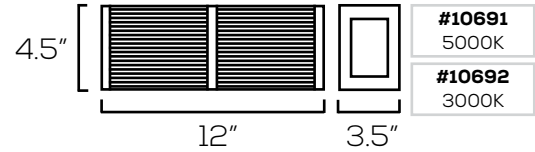

Optional: Finish Color, 30W, 40W

SES-V736-45-XXXX




Sloane
Series



Chrome Vanity, V736 - 41W

Watts:	41W
Lumens:	3,600lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Metal, Glass
Finish:	Chrome, Rods
Lifespan:	50,000 hours



Optional: Finish Color, 30W, 45W

SES-VT-1H



Kensal
Series



Vanity Tree Single - E26

Watts:	Bulb Dependent
Bulb:	A19 Type
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron, Glass
Finish:	Nickel, Frosted
Bulb Lifespan:	25,000 hours



Optional: Finish Color

SES-VF-3FT-5000-36




Kensal
Series



Vanity Light, 3 ft - 36W

Watts:	36W
Lumens:	3,060lm
CCT:	5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP40
Materials:	Metal, Acrylic
Finish:	Silver, Frosted
Lifespan:	50,000 hours



Optional: Finish Color

SES-VF-2FT-5000-28




Kensal
Series



Vanity Light, 2 ft - 28W

Watts:	28W
Lumens:	2,520lm
CCT:	5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP40
Materials:	Metal, Acrylic
Finish:	Silver, Frosted
Lifespan:	50,000 hours



Optional: Finish Color

SES-VT-4H




Kensal
Series



Vanity Tree - E26

Watts:	Bulb Dependent
Bulb:	A19 Type
Base:	E26 x 4
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron, Glass
Finish:	Nickel, Frosted
Bulb Lifespan:	25,000 hours



Optional: Finish Color

LED PENDANT LIGHTS

SARIN's LED Pendant Lights add a touch of elegance to the aesthetics of any room. These lights are only intended for indoor use and are designed to hang from a ceiling.

Applications:

- Lobbies
- Daycares
- Restaurants
- Galleries

Bulbs are sold separately for fixtures that require them.



▲ [Return to Table of Contents](#)




SES-PD0809-1A-3000-5



Pendant Light, PD0809 – 5.4W

Watts:	5.4W
Lumens:	432lm
CCT:	3000K
Voltage:	120V
Dimmable:	SCR
IP Rating:	IP20
Materials:	Metal, Glass
Finish:	Chrome, Smoky
Lifespan:	20,000 hours




SES-PD0907-1A-3000-4



Pendant Light, PD0907 – 4W

Watts:	4W
Lumens:	200lm
CCT:	3000K
Voltage:	24V
Dimmable:	No
IP Rating:	IP20
Materials:	Metal, Glass
Finish:	Chrome, Frosted
Lifespan:	20,000 hours




SES-PD0901-1A-3000-10



Pendant Light, PD0901 – 10W

Watts:	10W
Lumens:	800lm
CCT:	3000K
Voltage:	110V
Dimmable:	TRIAC
IP Rating:	IP20
Materials:	Metal, Acrylic
Finish:	Chrome, Frosted
Lifespan:	20,000 hours




SES-PD0808-1A-3000-4.5



Pendant Light, PD0808 – 5.4W

Watts:	5.4W
Lumens:	432lm
CCT:	3000K
Voltage:	120V
Dimmable:	SCR
IP Rating:	IP20
Materials:	Metal, Acrylic
Finish:	Chrome, Clear
Lifespan:	20,000 hours




SES-TPL-5000-20



Pendant Light, PD0902-4B – 20W

Watts:	20W
Lumens:	1,800lm
CCT:	3000K
Voltage:	110V
Dimmable:	SCR
IP Rating:	IP20
Materials:	Metal, Acrylic
Finish:	Black, Clear
Lifespan:	20,000 hours

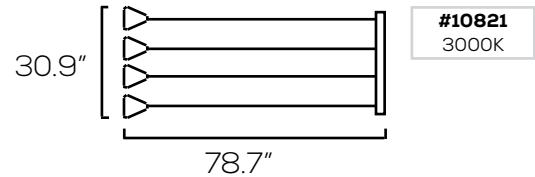


SES-PD0902-1A-3000-5



Pendant Light, PD0902-1A – 5W

Watts:	5W
Lumens:	400lm
CCT:	3000K
Voltage:	110V
Dimmable:	TRIAC
IP Rating:	IP20
Materials:	Metal, Acrylic
Finish:	Black, Clear
Lifespan:	20,000 hours



SES-PD10594B-40-XXXX




Victoria Series



Crystal Pendant, Centered - 40W

Watts:	40W
Lumens:	3,200lm
CCT:	3000K/5000K
Voltage:	AC110 - 240V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, Acrylic
Finish:	Black, Crystal
Lifespan:	30,000 hours



#10594
3000K

#10596
5000K

Optional: Finish Color, 70W

SES-PD10595B-40-XXXX




Victoria Series



Crystal Pendant, Offset - 40W

Watts:	40W
Lumens:	3,200lm
CCT:	3000K/5000K/6000K
Voltage:	AC110 - 240V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, Acrylic
Finish:	Black, Crystal
Lifespan:	30,000 hours



#10595
3000K

#10597
5000K

#10598
6000K


Optional: Finish Color, 70W

SES-PD0720-1A-3000-12



Pendant Light, PD0720 - 12W

Watts:	12W
Lumens:	960lm
CCT:	3000K
Voltage:	120V
Dimmable:	SCR
IP Rating:	IP20
Materials:	Metal, Acrylic
Finish:	White, Frosted
Lifespan:	20,000 hours



#10816
3000K

SES-PDL383-E26



Kensington Series



Iron Pendant, PDL383 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Glossy Black
Bulb Lifespan:	25,000 hours



Optional: Finish Color

SES-PDL173-E26




Kensington Series



Iron Pendant, PDL173 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Black
Bulb Lifespan:	25,000 hours



SES-PDL026-E26



Kensington Series



Iron Pendant, PDL026 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Black
Bulb Lifespan:	25,000 hours



Optional: Finish Color

SES-PDL011-E26




Kensington
Series



Iron Pendant, PDL011 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Black
Bulb Lifespan:	25,000 hours

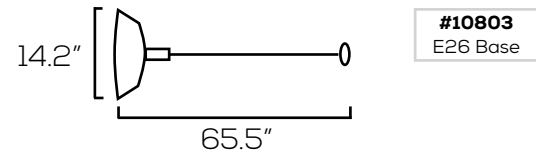

Optional: Finish Color

SES-PDL023-E26




Kensington
Series



Iron Pendant, PDL023 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Black, White
Bulb Lifespan:	25,000 hours

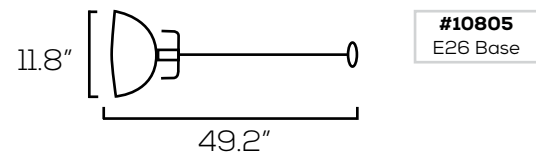

Optional: Finish Color

SES-PDL020-E26



Kensington
Series



Iron Pendant, PDL020 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Black, Gold
Bulb Lifespan:	25,000 hours




Optional: Finish Color

SES-PDGNX-XE26




Glass Pendant Fixture - E26

Watts:	Bulb Dependent
Bulb:	PAR20
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Steel, Glass, Crystal
Finish:	Chrome, Clear
Bulb Lifespan:	25,000 hours

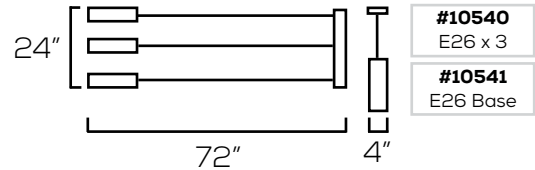


SES-PDL064-E26

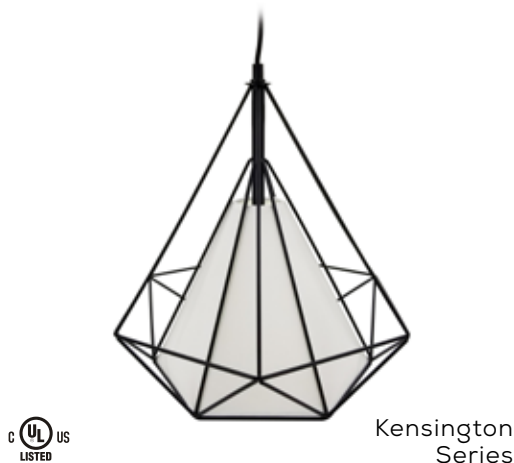

Iron Pendant, PDL064 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron, Fabric
Finish:	Black, White
Bulb Lifespan:	25,000 hours

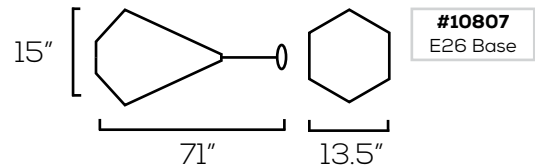


SES-PDL108-E26



Iron Pendant, PDL108 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26 x 3
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Black
Bulb Lifespan:	25,000 hours



Optional: Finish Color, E26 x 1

SES-PDL487B-E26




Kensington
Series



Iron Pendant, PDL487B - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Rustic Gray
Bulb Lifespan:	25,000 hours



SES-PDL487C-E26-C




Kensington
Series



Iron Pendant, PDL487C - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Rustic Gray
Bulb Lifespan:	25,000 hours

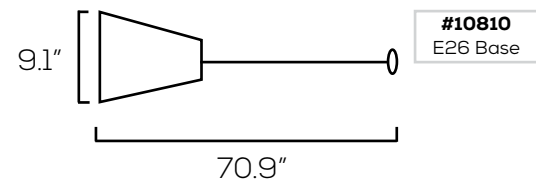

SES-PDL120-E26




Kensington
Series



Iron Pendant, PDL120 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type, Vintage
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Iron
Finish:	Black
Bulb Lifespan:	25,000 hours

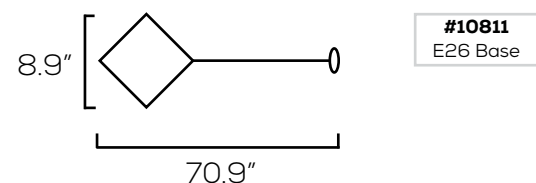

SES-TPL-5000-20




Acton
Series



Transparent Pendant - 20W

Watts:	20W
Lumens:	1,600lm
CCT:	5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PMMA
Finish:	White, Clear
Lifespan:	30,000 hours



#10599
5000K

SES-TPL-RGBW-15




Acton
Series



RGB Transparent Pendant - 15W

Watts:	15W
CCT:	RGB
Voltage:	AC110 - 240V
Dimmable:	Remote
IP Rating:	IP20
Materials:	Aluminum, PMMA
Finish:	White, Clear
Lifespan:	30,000 hours



#10600
RGB



We Manufacture Custom Decorative Fixtures

If you need a fixture that is not part of our normal collection, we can make it happen. Just send us an example of what you are looking for and we will give you a variety of options to choose from that match your requirements. Below are some of the lights we have custom manufactured last year. Email LED@SARINEnergy.com to get started.



LED CEILING LIGHTS

SARIN's Ceiling Lights come in variety of shapes and sizes. They are designed to easily replace incandescent or CFL lighting fixtures. These lights are also widely used for new building construction and are easy to install which reduces manual labor costs.

Applications:

- Homes
- Offices
- Hotels
- Places of Worship

▲ [Return to Table of Contents](#)



SES-SDL4-CCT-9




Slim
Series



CCT Slim Downlight, 4 in - 9W

Watts:	9W
Lumens:	700lm
CCT Switch:	2700K, 3000K, 3500K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	35,000 hours



Optional: Bronze, Black, or Brushed Nickel Trim

#10192
CCT

Covers
40192-A
40192-B
40192-C

SES-SDL6-02-CCT-15




Slim
Series



CCT Slim Downlight, 6 in - 15W

Watts:	15W
Lumens:	1,200lm
CCT Switch:	2700K, 3000K, 3500K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Aluminum, Glass, PP
Finish:	White, Frosted
Lifespan:	50,000 hours



Optional: Bronze, Black, or Brushed Nickel Trim

#10893
CCT

Covers
40193-A
40193-B
40193-C

SES-SDL8-CCT-18



Slim
Series



CCT Slim Downlight, 8 in - 18W

Watts:	18W
Lumens:	1,440lm
CCT Switch:	2700K, 3000K, 3500K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Aluminum, Glass, PP
Finish:	White, Frosted
Lifespan:	50,000 hours



#10892
CCT

SES-SDL4-RGBWW-10




Slim Series



RGBW Slim Downlight, 4 in - 10W

Watts:	10W
Lumens:	600lm
CCT:	RGB, 3000K, 6500K
Voltage:	AC120V
Dimmable:	App
IP Rating:	IP20
Materials:	Aluminum, PMMA
Finish:	White, Frosted
Lifespan:	35,000 hours



Optional: Bronze, Black, or Brushed Nickel Trim

#10878
RGBW

Covers

40192-A
40192-B
40192-C

SES-SDL6-RGBWW-12




Slim Series



RGBW Slim Downlight, 6 in - 12W

Watts:	12W
Lumens:	900lm
CCT:	RGB, 3000K, 6500K
Voltage:	AC120V
Dimmable:	App
IP Rating:	IP20
Materials:	Aluminum, PMMA
Finish:	White, Frosted
Lifespan:	35,000 hours



Optional: Bronze, Black, or Brushed Nickel Trim

#10879
RGBW

Covers


40193-A
40193-B
40193-C

SES-SQDL4-CCT-10



CCT Retrofit Downlight, 4 in - 10W

Watts:	10W
Lumens:	760lm
CCT Switch:	2700K, 3000K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours



#10188
CCT

SES-SSDL4-CCT-10



Slim
Series



CCT Slim Downlight, 4 in - 10W

Watts:	10W
Lumens:	600lm
CCT Switch:	2700K, 3000K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours



#10181
CCT

SES-SSDL6-CCT-15



Slim
Series



CCT Slim Downlight, 6 in - 15W

Watts:	15W
Lumens:	1,000lm
CCT Switch:	2700K, 3000K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours




#10182
CCT

SES-SQDL6-CCT-15



CCT Retrofit Downlight, 6 in - 15W

Watts:	15W
Lumens:	1,200lm
CCT Switch:	2700K, 3000K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours




#10189
CCT

SES-DL00-50CS216-S471W-03



Commercial Downlight, 6 in - 15-30W

Watts:	15W, 23W, 30W
Lumens:	1,200 - 2,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP20
Materials:	Aluminum
Finish:	Silver, Frosted
Lifespan:	50,000 hours




#10190
CCT

SES-DL00-30CS168-S470W-03



Commercial Downlight, 8 in - 37-50W

Watts:	37W, 42W, 50W
Lumens:	3,145 - 4,250lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP20
Materials:	Aluminum
Finish:	Silver, Frosted
Lifespan:	50,000 hours



#10191
CCT

SES-JDL-XXXX-15




Smith
Series



Downlight & Junction Box, 6 in - 15W

Watts:	15W
Lumens:	1,050lm
CCT:	3000K / 5000K
Voltage:	AC110 - 277V
Dimmable:	TRIAC
IP Rating:	IP43
Materials:	Aluminum, Acrylic
Finish:	White, Frosted
Lifespan:	50,000 hours



#10212
3000K


#10213
5000K

SES-RDL4-CCT-9



CCT Gimbal Downlight, 4 in - 9W

Watts:	9W
Lumens:	900lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	TRIAC
IP Rating:	IP44
Materials:	Aluminum
Finish:	White, Clear
Lifespan:	50,000 hours



Optional: Finish Color, 12W

SES-DL834-10-CCT




Smith Series



CCT Retrofit Downlight, 4 in - 10W

Watts:	10W
Lumens:	700lm
CCT Switch:	2700K, 3000K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Materials:	Iron, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

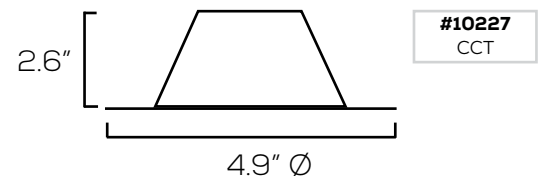

SES-DL836-15-CCT




Smith Series



CCT Retrofit Downlight, 6 in - 15W

Watts:	15W
Lumens:	1,100lm
CCT Switch:	2700K, 3000K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Materials:	Iron, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

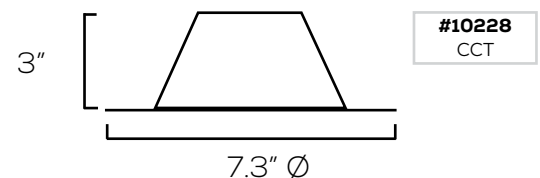

SES-WL/CL18903-5000




Stanford
Series



Outdoor Round Ceiling Light - 20W

Watts:	20W
Lumens:	1,200lm
CCT:	5000K
Voltage:	AC120V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Dark Gray / Silver
Lifespan:	30,000 hours

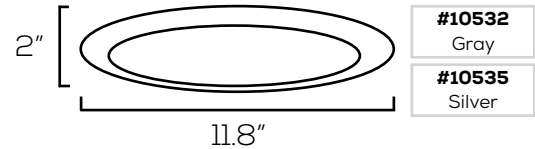

Optional: Finish Color

SES-WL/CL18803-5000




Stanford
Series



Outdoor Square Ceiling Light - 20W

Watts:	20W
Lumens:	1,200lm
CCT:	5000K
Voltage:	AC120V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Dark Gray / Silver
Lifespan:	30,000 hours

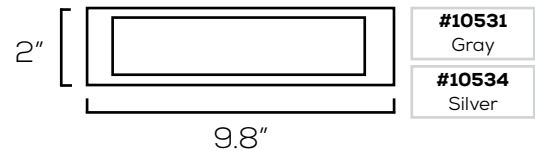

Optional: Finish Color

SES-DISC-XXXX-15




Smith
Series



Disk Light, 6 in - 15W

Watts:	15W
Lumens:	1,100lm
CCT:	3000K / 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP20
Materials:	PC
Finish:	White, Frosted
Lifespan:	50,000 hours

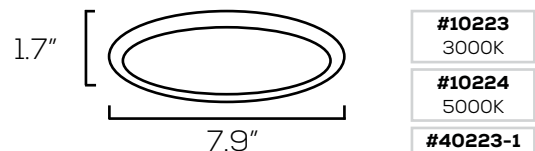


Optional: Can Adapter Kit

SES-CLWLT-18-XXXXR



Transparent Ceiling Light - 18W

Watts:	18W
Lumens:	2,052lm
CCT:	3000K / 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP20
Materials:	Aluminum, PMMA
Finish:	White, Clear
Lifespan:	50,000 hours



Covers	#10183
40183-A	3000K
40183-B	
40183-C	
	#10184
	5000K


Optional: Cover Color, Sensor, 4000K, 12W, 24W

SES-CLWLT-18-XXXXS



Transparent Ceiling Light - 18W

Watts:	18W
Lumens:	2,052lm
CCT:	3000K / 5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP20
Materials:	Aluminum, PMMA
Finish:	White, Clear
Lifespan:	50,000 hours



Covers	#10185
40183-A	3000K
40183-B	
40183-C	
	#10186
	5000K

Optional: Cover Color, Sensor, 4000K, 12W, 24W

LED TROFFERS & PANELS

SARIN's LED Troffer and Panel Lights provide the perfect light distribution for offices and work areas. Designed with elegance and built from quality materials such as PMMA and high grade metal, these fixtures will brighten up any work environment.

Applications:

- Offices
- Stores
- Schools
- Hospitals

▲ [Return to Table of Contents](#)




SES-BL22-S40-CCDD



CCT Backlit Panel Light - 20-40W

Watts Switch:	20W, 30W, 40W
Lumens:	2,200 - 4,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V, PWM, RX
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours



#10973
2x2 ft

#10969*
2x2 ft


*With Emergency Driver

SES-BL24-S60-CCDD



CCT Backlit Panel Light - 40-60W

Watts Switch:	40W, 50W, 60W
Lumens:	4,400 - 6,600lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V, PWM, RX
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

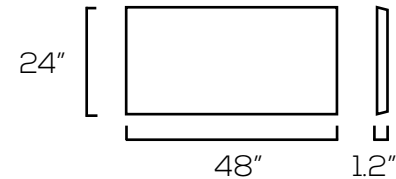

#10974
2x4 ft

#10970*
2x4 ft


*With Emergency Driver

SES-BL24-F72-50




Backlit Panel Light - 72W

Watts:	72W
Lumens:	9,000lm
CCT:	6500K
Voltage:	AC100 - 277V
Dimmable:	0-10V
IP Rating:	IP40
Materials:	Aluminum, PS
Finish:	White
Lifespan:	50,000 hours

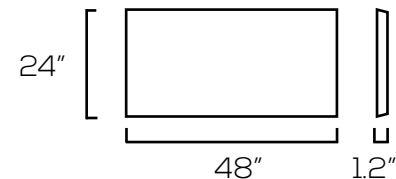


#10980
6500K

SES-BL22-S40-CCDD

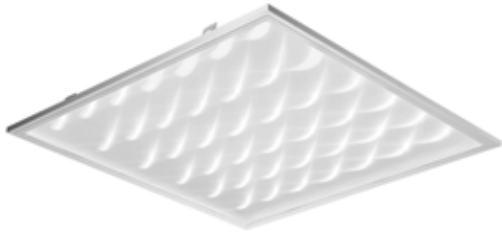

Wave CCT Panel Light - 20-40W

Watts Switch:	20W, 30W, 40W
Lumens:	2,200 - 4,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V, PWM, RX
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Wave
Lifespan:	50,000 hours



#10973-W
Wave


Activate both chipsets
with the 4000K setting.

SES-BL22-S40-CCDD



Trapezoid CCT Panel Light - 20-40W

Watts Switch:	20W, 30W, 40W
Lumens:	2,200 - 4,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V, PWM, RX
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Trapezoid
Lifespan:	50,000 hours



#10973-T
Trapezoid


Activate both chipsets
with the 4000K setting.

SES-BL22-S40-CCDD



Pyramid CCT Panel Light - 20-40W

Watts Switch:	20W, 30W, 40W
Lumens:	2,200 - 4,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V, PWM, RX
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Pyramid
Lifespan:	50,000 hours



#10973-P
Pyramid


Activate both chipsets
with the 4000K setting.

SES-BL22-S40-CCDD



Beam CCT Panel Light - 20-40W

Watts Switch:	20W, 30W, 40W
Lumens:	2,200 - 4,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V, PWM, RX
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Beam
Lifespan:	50,000 hours



#10973-B
Beam


Activate both chipsets
with the 4000K setting.

SES-BL22-S40-CCDD



Diamond CCT Panel Light - 20-40W

Watts Switch:	20W, 30W, 40W
Lumens:	2,200 - 4,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V, PWM, RX
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Diamond
Lifespan:	50,000 hours



#10973-D
Diamond


Activate both chipsets
with the 4000K setting.

SES-BL22-S40-CCDD



Frozen CCT Panel Light - 20-40W

Watts Switch:	20W, 30W, 40W
Lumens:	2,200 - 4,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V, PWM, RX
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Frozen
Lifespan:	50,000 hours



#10973-F
Frozen


Activate both chipsets
with the 4000K setting.

SES-TRO22-CCT-40-M



Mesh CCT Fusion Troffer - 26-40W

Watts Switch:	26W, 32W, 40W
Lumens:	2,860 - 4,400lm
CCT Switch:	3500K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Steel, PC
Finish:	White
Lifespan:	50,000 hours




#10869
Mesh

SES-TRO22-CCT-40-P



Point CCT Fusion Troffer - 26-40W

Watts Switch:	26W, 32W, 40W
Lumens:	2,860 - 4,400lm
CCT Switch:	3500K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Steel
Finish:	White
Lifespan:	50,000 hours




#10871
Point

SES-TRO22-CCT-40-NCB



Void CCT Fusion Troffer - 26-40W

Watts Switch:	26W, 32W, 40W
Lumens:	2,600 - 4,000lm
CCT Switch:	3500K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Steel
Finish:	White
Lifespan:	50,000 hours




#10873
Void

SES-TRO24-CCT-50-M



Mesh CCT Fusion Troffer - 36-50W

Watts Switch:	36W, 42W, 50W
Lumens:	3,960 - 5,500lm
CCT Switch:	3500K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Steel, PC
Finish:	White
Lifespan:	50,000 hours

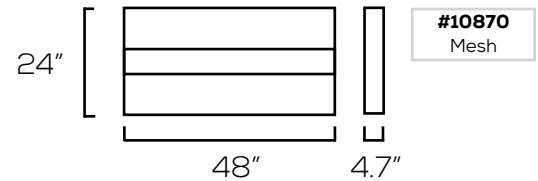


SES-TRO24-CCT-50-P



Point CCT Fusion Troffer - 36-50W

Watts Switch:	36W, 42W, 50W
Lumens:	3,960 - 5,500lm
CCT Switch:	3500K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Steel
Finish:	White
Lifespan:	50,000 hours

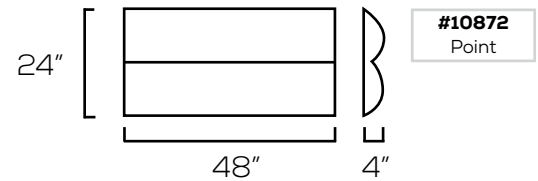


SES-TRO24-CCT-50-NCB




Void CCT Fusion Troffer - 36-50W

Watts Switch:	36W, 42W, 50W
Lumens:	3,600 - 5,000lm
CCT Switch:	3500K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Steel
Finish:	White
Lifespan:	50,000 hours

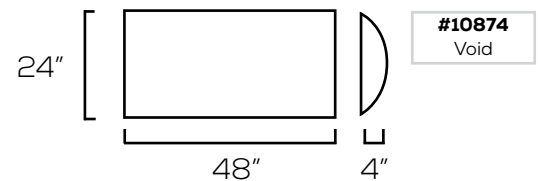

SES-PL22C-CCT-40Z

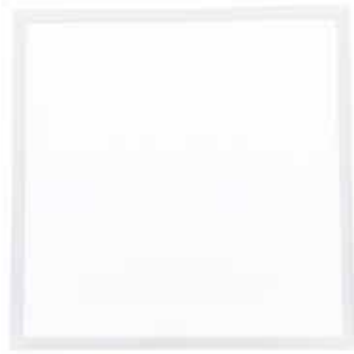


Arsenal Series



CCT Edge-Lit Panel, 2x2 ft - 40W

Watts:	40W
Lumens:	4,200lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Aluminum, PMMA
Finish:	White, Frosted
Lifespan:	50,000 hours



#10975
2x2 ft

SES-PL24C-CCT-50Z




Arsenal Series



CCT Edge-Lit Panel, 2x4 ft - 50W

Watts:	50W
Lumens:	5,250lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Aluminum, PMMA
Finish:	White, Frosted
Lifespan:	50,000 hours




#10976
2x4 ft

Optional: 70W

SES-TR22-30/40/50-24/36-T




Manor Series



CCT Troffer, 2x2 ft - 24-36W

Watts Switch:	24W, 36W
Lumens:	3,000 - 4,500lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP20
Materials:	Steel, PC
Finish:	White, Frosted
Lifespan:	50,000 hours




#10978
2x2 ft

SES-FL2*2-K40-CCDD




Halo
Series



CCT T-Bar Panel, 2x2 ft- 20-40W

Watts Switch:	20W, 30W, 40W
Lumens:	2,200 - 4,400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

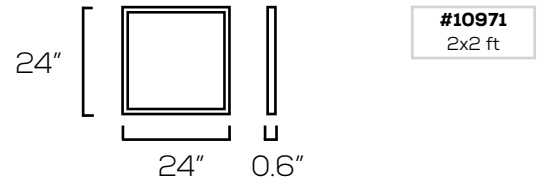

SES-FL2*4-K60-CCDD




Halo
Series



CCT T-Bar Panel, 2x4 ft - 40-60W

Watts Switch:	40W, 50W, 60W
Lumens:	4,400 - 6,600lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

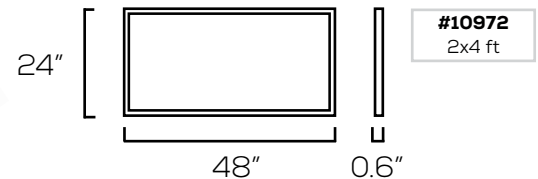

SES-TR24-30/40/50-36/42/50-T




Manor
Series



CCT Troffer, 2x4 ft - 36-50W

Watts Switch:	36W, 42W, 50W
Lumens:	4,500 - 6,250lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP20
Materials:	Steel, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

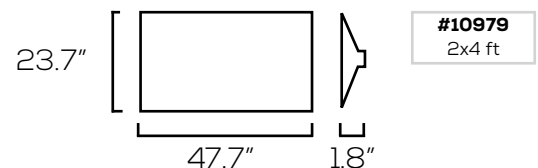

LED LINEAR & TUBE LIGHTS

SARIN's LED Tube Lights are used in a variety of applications. Replace old fluorescent tube lighting with new, energy efficient T8s. Most linear lights can have a clear, striped, or frosted lens. Phantom Lights add flair to any indoor area with the ability to change color temperature and dim.

Applications:

- Offices
- Schools
- Grocery Stores
- Convenience Stores

Tubes are sold separately for fixtures that require them.

▲ [Return to Table of Contents](#)



SES-LA01C-20-3/4/5K



CCT Wraparound, 2 ft - 20W

Watts:	20W
Lumens:	2,500lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum
Finish:	White, Frosted
Lifespan:	50,000 hours



#11119
2 ft
#13030
Motion Sensor
#13031
Backup Driver


Optional: 180° Connector, Mount

SES-LA01C-40/30/20-3/4/5K



CCT Wraparound, 3 ft - 20-40W

Watts:	20W, 30W, 40W
Lumens:	2,500 - 5,200lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum
Finish:	White, Frosted
Lifespan:	50,000 hours



#11120
3 ft
#13030
Motion Sensor
#13031
Backup Driver


Optional: 180° Connector, Mount

SES-LA01C-70/60/50-3/4/5K



CCT Wraparound, 4 ft - 50-70W

Watts:	50W, 60W, 70W
Lumens:	6,250 - 9,300lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum
Finish:	White, Frosted
Lifespan:	50,000 hours



#11121
4 ft
#13030
Motion Sensor
#13031
Backup Driver

Optional: 180° Connector, Mount

SES-UCAB-1-CCT



Linkable CCT Cabinet Light - 1W

Watts:	1W
Lumens:	80lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	DC24V
Dimmable:	Press or Sensor
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Frosted
Lifespan:	30,000 hours



#11250
CCT

Optional: Accessories

SES-UCAB-3.5-CCT



Linkable CCT Cabinet Light - 3.5W

Watts:	3.5W
Lumens:	320lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	DC24V
Dimmable:	Press or Sensor
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Frosted
Lifespan:	30,000 hours



#11251
CCT

Optional: Accessories

SES-UCAB-6.5-CCT



Linkable CCT Cabinet Light - 6.5W

Watts:	6.5W
Lumens:	560lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	DC24V
Dimmable:	Press or Sensor
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Frosted
Lifespan:	30,000 hours




#11252
CCT

Optional: Accessories




Linkable CCT Cabinet Light - 13W

Watts:	13W
Lumens:	1,000lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	DC24V
Dimmable:	Press or Sensor
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Frosted
Lifespan:	30,000 hours



Optional: Accessories




SES-T8INT2FT-XXXX-10



Integrated Tube Light, 2 ft - 10W

Watts:	10W
Lumens:	1,200lm
CCT:	4000K / 5000K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours

1.5"	[]		#10148 4000K Frosted
	1.2"	23.9"	#10159 5000K


Optional: Frosted Lens, Striped Lens

SES-T8INT3FT-6500-14



Integrated Tube Light, 3 ft - 14W

Watts:	14W
Lumens:	1,680lm
CCT:	5000K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours

1.5"	[]		#10158 5000K
	1.2"	35.7"	


Optional: Frosted Lens, Striped Lens

SES-T8IN4FT-XXXX-22



Integrated Tube Light, 4 ft - 22W

Watts:	22W
Lumens:	2,980lm
CCT:	4000K / 5000K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours

1.5"	[]		#10149 4000K Frosted
	1.2"	47.6"	#10151 5000K


Optional: Frosted Lens, Striped Lens

SES-T8IN8FT-5000-60



Integrated Tube Light, 8 ft - 60W

Watts:	60W
Lumens:	7,500lm
CCT:	5000K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours


1.5"			#10150 Clear
1.2"		94.8"	#10152 Striped

SES-LMLBS-6000-16



Magnetic Shelf Light Kit, 4 ft - 16W

Watts:	16W
Lumens:	1,049lm
CCT:	6000K
Voltage:	AC90 - 240V
Dimmable:	PWM
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	30,000 hours


0.6"		#10715 6-Pack
	46.5"	

SES-XFTANT



Parabolic Troffer - T8

Watts:	Bulb Dependent
Bulb:	T8 Tube
CCT:	3000 - 6500K
Voltage:	AC90 - 277V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum
Finish:	Chrome
Tube Lifespan:	50,000 hours


19.7"			#10242 2x4 ft
	47.2"	3"	#10241 2x2 ft

SES-TP12-5000-40



Tri-Proof Light, 4 ft - 40W

Watts:	40W
Lumens:	5,480lm
CCT:	5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours




Optional: 60W

SES-TP15-5000-80



Tri-Proof Light, 5 ft - 80W

Watts:	80W
Lumens:	10,400lm
CCT:	5000K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours




Optional: 60W

SES-T5-XXXX-18



T5 Tube Light Green, 4 ft - 18W

Watts:	18W
Lumens:	2,650 - 2,900lm
CCT:	3000K / 5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Striped
Lifespan:	50,000 hours




DE: Double-Ended SE: Single-Ended
Optional: Rotating Cap, 9W, 15W, 24W

SES-CL5FT-XXXX-32



Cooler Light, 5 ft - 32W

Watts:	32W
Lumens:	3,310lm
CCT:	3000K/4000K/5000K
Voltage:	AC90 - 277V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours



#10167
3000K

#10162
4000K


#10160
5000K

SES-CL6FT-5000-40



Cooler Light, 6 ft - 40W

Watts:	40W
Lumens:	4,780lm
CCT:	5000K
Voltage:	AC90 - 277V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours




#10161
5000K

SES-U2T8-5000-18



T8 U-Tube Light - 18W

Watts:	18W
Lumens:	2,250lm
CCT:	5000K
Voltage:	AC100 - 277V
Dimmable:	TRIAC
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Clear
Lifespan:	50,000 hours



#10117
5000K DE


DE: Double-Ended SE: Single-Ended

SES-T82FT-5000-10



T8 Tube Light, 2 ft - 10W

Watts:	10W
Lumens:	1,100lm
CCT:	5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Clear
Lifespan:	50,000 hours



#10100
5000K SE


DE: Double-Ended SE: Single-Ended
Optional: Frosted Lens, Striped Lens, 22W

SES-3T8-XXXX-15



T8 Tube Light, 3 ft - 15W

Watts:	15W
Lumens:	1,600lm
CCT:	5000K / 6500K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Clear
Lifespan:	50,000 hours



#10101
5000K SE

#10102
6500K SE
Frosted


DE: Double-Ended SE: Single-Ended
Optional: Frosted Lens, Striped Lens

SES-4T8-XXXX-18



T8 Tube Light, 4 ft - 18W

Watts:	18W
Lumens:	2,250lm
CCT:	3000K / 4000K / 5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Silver, Clear
Lifespan:	50,000 hours



#10122
3000K DE

#10123
4000K DE

#10104
5000K DE

DE: Double-Ended SE: Single-Ended
Optional: Frosted Lens, Striped Lens, 12W, 22W



M³ INSPIRATION

MODERN. MAGNETIC. MODULAR.



PENDANT



TRACK



GROUND

LED INDOOR LAMPS

Whether you're looking to add a touch of class or a hint of fun to accent a room, SARIN has a light for you! Our Indoor Lamps come in various styles and colors to fit even the most distinguished of guests.

Applications:

- Homes
- Hotels
- Restaurants
- Bars

Bulbs are sold separately for fixtures that require them.

[▲ Return to Table of Contents](#)



SES-WL330-E26SN




Russell
Series



Wall Lamp, WL330 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type
Base:	E26
Voltage:	AC100 - 277V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Metal, Fabric
Finish:	Nickel
Bulb Lifespan:	25,000 hours

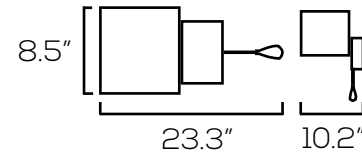

#10591
USB x 2
Outlet x 1

Optional: Finish Color, Plug, USB, Switch

SES-TL350-E26SN



Russell
Series



Table Lamp, TL350 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type
Base:	E26
Voltage:	AC110 - 120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Metal, Fabric
Finish:	Nickel
Bulb Lifespan:	25,000 hours



#10276
E26 Base

#10593
USB x 2

Optional: Finish Color, Plug, USB, Switch

SES-FL340-E26SN




Russell
Series



Floor Lamp, FL340 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type
Base:	E26
Voltage:	AC110 - 120V
Dimmable:	Bulb Dependent
IP Rating:	IP20
Materials:	Metal, Fabric
Finish:	Nickel
Bulb Lifespan:	25,000 hours



#10592
E26 Base

Optional: Finish Color, Plug, USB, Switch

SES-WL742-RGB-3W




Butterfly Series



RGB Wall Lamp, WL742 - 3W

Watts:	3W
Lumens:	270lm
CCT:	RGB
Voltage:	AC85 - 265V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum
Finish:	Silver
Lifespan:	50,000 hours




Optional: Finish Color

SES-WL753-XX-6W




Butterfly Series



RGB Wall Lamp, WL753 - 6W

Watts:	6W
Lumens:	540lm
CCT:	3000K / RGB
Voltage:	AC85 - 265V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum
Finish:	Silver
Lifespan:	50,000 hours



Optional: Finish Color

SES-WL743-RGB-3W



Butterfly Series



RGB Wall Lamp, WL743 - 3W

Watts:	3W
Lumens:	270lm
CCT:	RGB
Voltage:	AC85 - 265V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum
Finish:	Silver
Lifespan:	50,000 hours



Optional: Finish Color

SES-WL750-RGB-3W




Butterfly
Series



RGB Wall Lamp, WL750 - 3W

Watts:	3W
Lumens:	270lm
CCT:	RGB
Voltage:	AC85 - 265V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum
Finish:	Silver
Lifespan:	50,000 hours



#10783
RGB

SES-WL745-RGB-4*3W




Butterfly
Series



RGB Wall Lamp, WL745 - 12W

Watts:	3W x 4
Lumens:	1,080lm
CCT:	RGB
Voltage:	AC85 - 265V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum
Finish:	Black, White
Lifespan:	50,000 hours




#10782
RGB

SES-WL-5135-XXXX-6



Wall Lamp, WL5135 - 6W

Watts:	6W
Lumens:	480lm
CCT:	3000K / 5000K
Voltage:	AC100-277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, PC
Finish:	Black / White
Lifespan:	50,000 hours

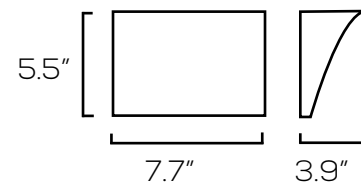

#10557
5000K W

#10560
3000K B

LED HIGH BAY LIGHTS

SARIN's LED High Bays are built from strong materials that are safe for use in extreme temperatures. They are perfect for areas with high ceilings that would be difficult to light up efficiently with typical ceiling lights.

Applications:

- Warehouses
- Factories
- Exhibition Halls
- Gymnasiums

▲ [Return to Table of Contents](#)



SES-HB05B-100WCG-XH50




Harrow Series



UFO High Bay - 100W

Watts:	100W
Lumens:	13,000lm
CCT:	5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#30293
5000K

Optional: Finish, Motion Sensor, Cover

SES-HB05B-150WCG-XH50




Harrow Series



UFO High Bay - 150W

Watts:	150W
Lumens:	21,640lm
CCT:	4000K / 5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black / White, Clear
Lifespan:	50,000 hours



#10294
4000K W

#10296
4000K B

#10293
5000K W

#10295
5000K B

*With Emergency Driver

#10354*
5000K B

Optional: Finish, Motion Sensor, Cover

SES-HB05B-240WCG-BH50




Harrow Series



UFO High Bay - 240W

Watts:	240W
Lumens:	35,000lm
CCT:	4000K / 5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



*With Emergency Driver

#10337
4000K

#10336
5000K

#10352*
5000K


Optional: Finish, Motion Sensor, Cover

SES-LHB3-110-5700-F-WH



Linear High Bay - 110W

Watts:	110W
Lumens:	15,500lm
CCT:	5700K
Voltage:	AC120 - 277V
Dimmable:	1 - 10V
IP Rating:	IP20
Materials:	Steel
Finish:	White, Frosted
Lifespan:	50,000 hours




Optional: Finish Color, Clear Lens, Motion Sensor, Cage, Chain, Pendant, Bracket, Emergency Backup

SES-LHB3-165-5000-F-WH




Linear High Bay - 165W

Watts:	110W
Lumens:	23,000lm
CCT:	5000K
Voltage:	AC120 - 277V
Dimmable:	1 - 10V
IP Rating:	IP20
Materials:	Steel
Finish:	White, Frosted
Lifespan:	50,000 hours




Optional: Finish Color, Clear Lens, Motion Sensor, Cage, Chain, Pendant, Bracket, Emergency Backup

SES-LHB3-220-5000-F-WH



Linear High Bay - 220W

Watts:	220W
Lumens:	31,000lm
CCT:	5000K
Voltage:	AC120 - 277V
Dimmable:	1 - 10V
IP Rating:	IP20
Materials:	Steel
Finish:	White, Frosted
Lifespan:	50,000 hours



Optional: Finish Color, Clear Lens, Motion Sensor, Cage, Chain, Pendant, Bracket, Emergency Backup

SES-DML-5000-75




Angel
Series



Flexible High Bay - 75W

Watts:	75W
Lumens:	9,000lm
CCT:	5000K
Voltage:	AC100 – 240V
Dimmable:	No
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

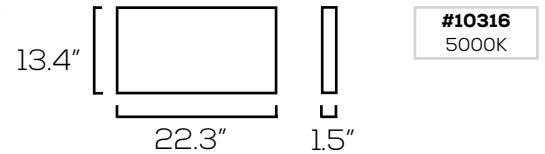

Optional: 45W, 90W, 105W

SES-DML-5000-150




Angel
Series



Flexible High Bay - 150W

Watts:	150W
Lumens:	18,000lm
CCT:	5000K
Voltage:	AC100 – 240V
Dimmable:	No
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

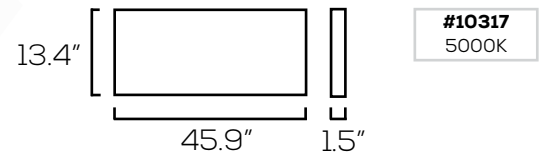

Optional: 45W, 90W, 105W

SES-DML-5000-210




Angel
Series



Flexible High Bay - 210W

Watts:	210W
Lumens:	25,200lm
CCT:	5000K
Voltage:	AC100 – 240V
Dimmable:	No
IP Rating:	IP40
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	50,000 hours

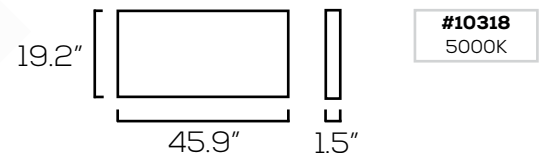

Optional: 45W, 90W, 105W




LED EXIT & EMERGENCY

SARIN's Exit and Emergency Lights are made from durable, fire-proof materials. With at least 90 minutes of backup power, you can be sure that these lights will reliably guide your staff and guests to safety.

Applications:

- Offices
- Hotels
- Stores
- Hospitals

▲ [Return to Table of Contents](#)

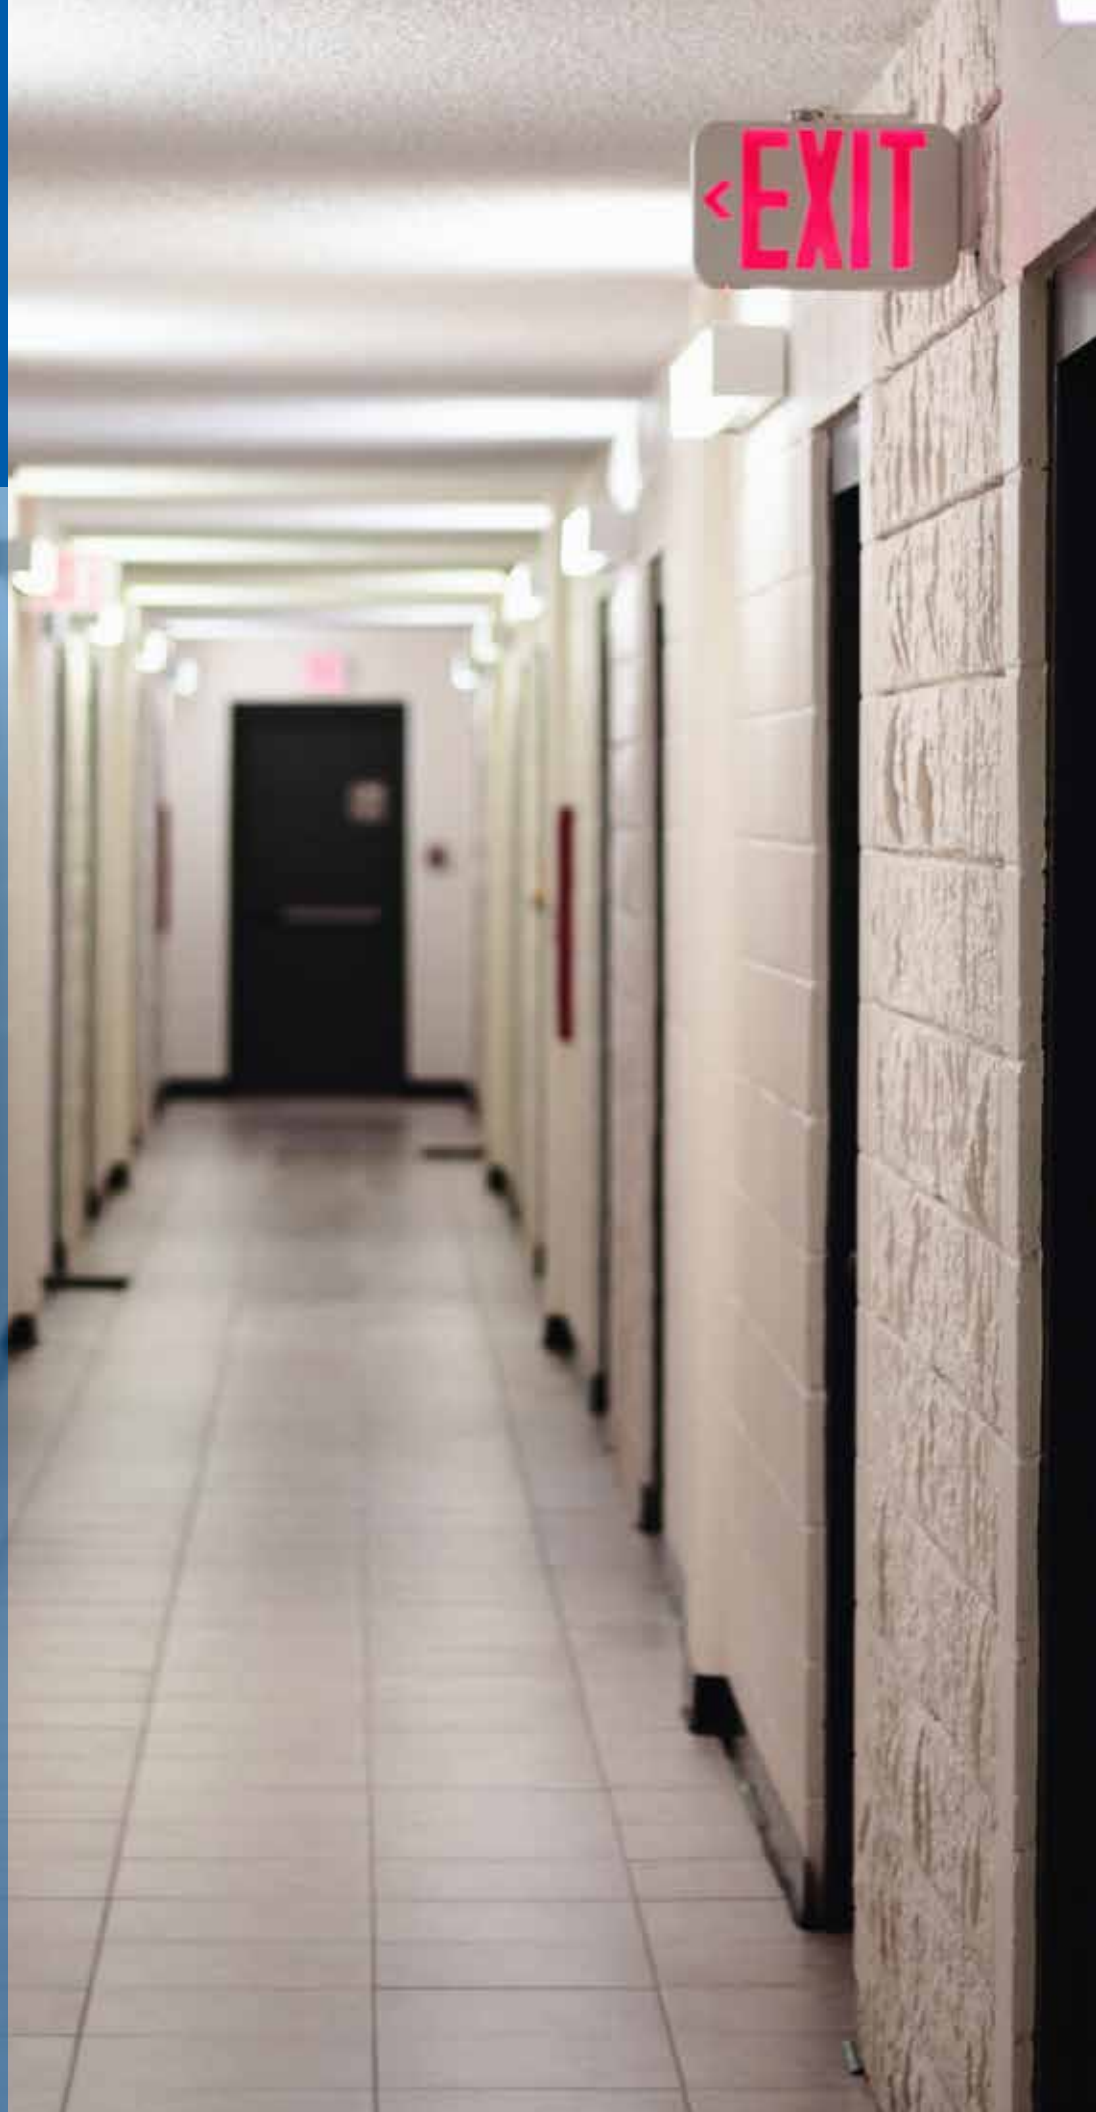

SES-EX7008RX-2W




Tufnell
Series



Reflective Edge-Lit Exit Sign - 2W

Watts:	2W
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, ABS
Finish:	Reflective, Red
Exit Sides:	Single / Double
Lifespan:	50,000 hours



#10719
Two Sides

#10797
One Side

Optional: Green Letters

SES-EXTEC2




Tufnell
Series



Exit & Emergency Sign - 5W

Watts:	5W
Lumens:	300lm
CCT:	6500K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	ABS
Finish:	White, Red
Lifespan:	50,000 hours



#10917
Two Sides

SES-EX7007-R




Tufnell
Series



Classic Exit Sign - 1W

Watts:	1W
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	ABS
Finish:	White, Red
Exit Sides:	Single
Lifespan:	50,000 hours



#10716
One Side


Optional: Green Letters

SES-EM08N



Emergency Driver, Small - 8W

Max Watts:	8W
Compatible With:	3W, 5W, 8W
Voltage:	AC100 - 277V
Power Time:	90 minutes
Recharge Time:	24 hours
Battery:	Ni-MH
IP Rating:	IP42
Test Switch:	Included




Suitable for LED product with internal driver.

SES-EM20D




Emergency Driver, Medium - 20W

Max Watts:	20W
Compatible With:	10W, 15W, 20W
Voltage:	AC100 - 277V
Power Time:	90 minutes
Recharge Time:	24 hours
Battery:	Ni-MH
IP Rating:	IP42
Test Switch:	Included




Suitable for LED product with external driver.

SES-EH25170

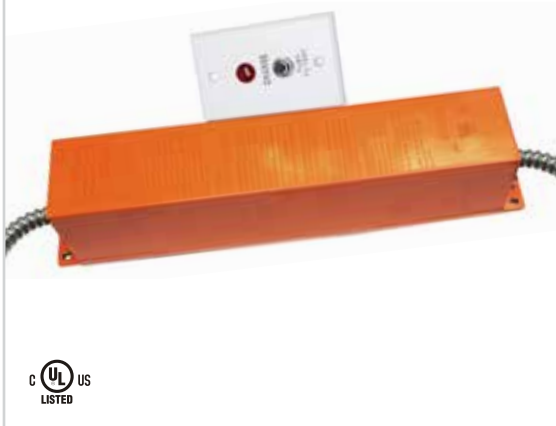

Emergency Driver, Large - 25W

Max Watts:	25W
Compatible With:	15W, 20W, 25W
Voltage:	AC100 - 277V
Power Time:	90 minutes
Recharge Time:	48 hours
Battery:	Ni-Cd
IP Rating:	IP42
Test Switch:	Included




SES-EX7006-W



Outdoor Exit Sign - 3W

Watts:	3W
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	ABS
Finish:	White, Red
Exit Sides:	Double
Lifespan:	25,000 hours



#10798
Two Sides

SES-SYHEP-18



Emergency Driver, Medium - 18W

Max Watts:	18W
Compatible With:	8W, 14W, 18W
Voltage:	AC120 - 277V
Power Time:	90 minutes
Recharge Time:	40 hours
Battery:	Ni-Cd
IP Rating:	IP20
Test Switch:	Included




#10742
18W

SES-BLD-HMXXD



Emergency Driver, Medium - 20W

Max Watts:	20W
Compatible With:	10W, 15W, 20W
Voltage:	AC100 - 347V
Power Time:	90 minutes
Recharge Time:	24 hours
Battery:	Li-ion
IP Rating:	IP20
Test Switch:	Not Included



#40229-C
20W

SES-OEM5WP




Tufnell
Series



Outdoor Emergency Light - 12W

Watts:	12W
Lumens:	450lm
CCT:	6000K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	ABS
Finish:	White, Clear
Lifespan:	15,000 hours

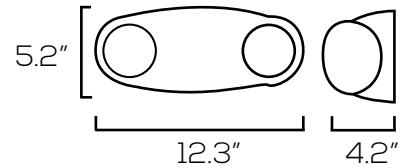

#10907
6000K

SES-EM7012




Tufnell
Series



Emergency Light - 2.5W

Watts:	2.5W
Lumens:	182lm
CCT:	7000 - 9000K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	ABS
Finish:	White, Clear
Lifespan:	25,000 hours

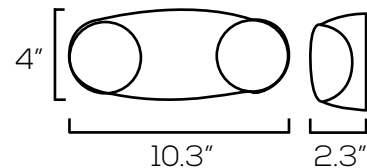

#10717
2.5W

SES-EMU9




Tufnell
Series



Emergency Light - 2.4W

Watts:	2.4W
Lumens:	240lm
CCT:	7000 - 9000K
Voltage:	AC120 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	ABS
Finish:	White, Clear
Lifespan:	25,000 hours



#10915
2.4W



ENVISION

LINEAR PROFILE EXTRUSIONS



LED CHANNEL & STRIP LIGHTS

SARIN's LED Channel and Strip Lights are widely used in a variety of applications. From cove and accent lighting to under cabinet, task, landscaping, and even architectural lighting, we have a strip light to suit your needs. Our flexible lights can be cut to fit in nearly any location.

Applications:

- Coves
- Under Cabinets
- Hallways
- Accents
- Landscaping
- Hotels
- Restaurants
- Stores

[▲ Return to Table of Contents](#)



SES-SLKIT-XXXX-20



Strip Light Kit - 20W

Watts:	20W
Lumens:	2,355 - 3,125lm
CCT:	2700K / 6000K / RGB
Voltage:	AC100 - 240V
Dimmable:	PWM
Strip IP Rating:	IP65 (Kit is IP20)
Materials:	Heat Shrink Plastic
Finish:	White
Lifespan:	50,000 hours

0.3" □	□	#10165 2700K
16.4'	0.1"	#10166 6000K
		#10163 RGB

SES-SLKIT-RGB-30



RGB Strip Light Kit - 30W

Watts:	30W
CCT:	RGB
Voltage:	AC100 - 240V
Dimmable:	PWM
Strip IP Rating:	IP65 (Kit is IP20)
Materials:	Heat Shrink Plastic
Finish:	White
Lifespan:	50,000 hours

0.4" □	□	#10164 RGB
32.8'	0.1"	

SES-BED4FT-3000-3





Bed Light Kit, Motion Sensor - 4W

Watts:	4W
Lumens:	200lm
CCT:	3000K
Voltage:	AC100 - 240V
Dimmable:	PWM
Strip IP Rating:	IP65 (Kit is IP20)
Materials:	Heat Shrink Plastic
Sensor:	10' Range
Lifespan:	50,000 hours



0.3" □	□	#10168 Sensor
3.94'	0.1"	

SES-24-7609C-B-XX

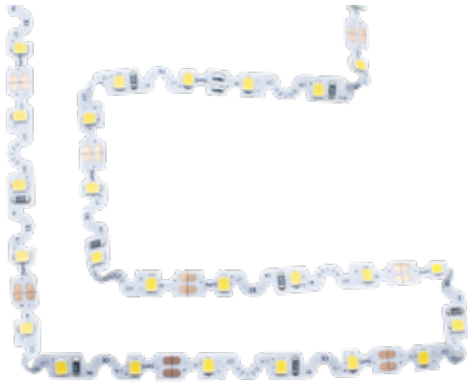

Side Bend Strip Light - 2.2W

Watts:	2.2W / ft
Lumens:	176lm / ft
CCT:	3000K/4000K/5000K/6000K
Voltage:	DC24V
Dimmable:	PWM
IP Rating:	IP20
Materials:	Flexible PCB
Finish:	White
Lifespan:	50,000 hours



0.24" 	#10668 4000K
16.4' 0.04" 	#10669 5000K
#10667 3000K	#10670 6000K

SES-SL-CCT-14.4



Adjustable CCT Strip Light - 4.4W

Watts:	4.4W / ft
Lumens:	364lm / ft
CCT Switch:	2700K - 6500K
Voltage:	DC24V
Dimmable:	PWM
IP Rating:	IP20
Materials:	Flexible PCB
Finish:	White
Lifespan:	50,000 hours



0.4" 	#10662 CCT
16.4' 0.04" 	#40662-F Remote

SES-SL-XXXX-18



High Efficacy Strip Light - 5.5W

Watts:	5.5W / ft
Lumens:	758lm / ft
CCT:	3000K/4000K/5000K/6000K
Voltage:	DC24V
Dimmable:	PWM
IP Rating:	IP20
Materials:	Flexible PCB
Finish:	White
Lifespan:	50,000 hours


0.4" 	#10664 4000K
16.4' 0.04" 	#10666 5000K
#10663 3000K	#10665 6000K

KVG-24030-DWJ



5-in-1 Strip Light Driver - 30W

Max Watts:	30W
Input Voltage:	AC100 - 277V
Output Voltage:	24V
Current:	1.25A
Frequency:	47 - 63Hz
IP Rating:	IP65
Protection:	Overload, Heat, Short Circuit
Dimming:	TRIAC, 0-10V, 1-10V, PWM, Potentiometer




KVG-24060-DWJ



5-in-1 Strip Light Driver - 60W

Max Watts:	60W
Input Voltage:	AC100 - 277V
Output Voltage:	24V
Current:	2.5A
Frequency:	47 - 63Hz
IP Rating:	IP65
Protection:	Overload, Heat, Short Circuit
Dimming:	TRIAC, 0-10V, 1-10V, PWM, Potentiometer






KVG-24096-DWJ



5-in-1 Strip Light Driver - 96W


Max Watts:	96W
Input Voltage:	AC100 - 277V
Output Voltage:	24V
Current:	4A
Frequency:	47 - 63Hz
IP Rating:	IP65
Protection:	Overload, Heat, Short Circuit
Dimming:	TRIAC, 0-10V, 1-10V, PWM, Potentiometer



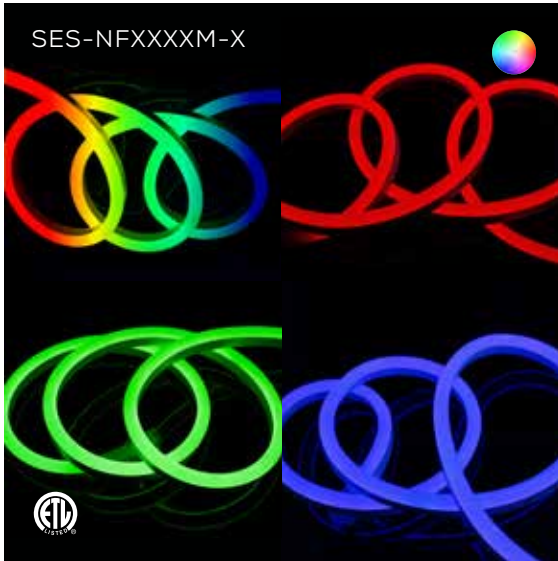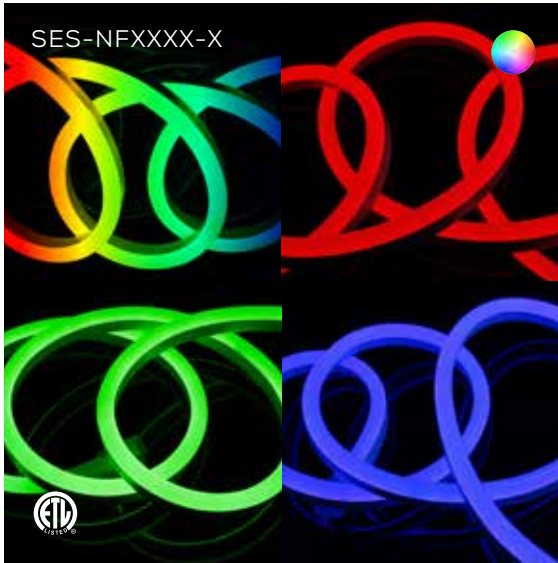

Neon Flex Tube - 1-3W

Watts:	1 - 3W / Foot
CCT:	3000K, 5000K, RGB
Voltage:	AC110 - 130V
Dimmable:	TRIAC
IP Rating:	IP65
Materials:	PVC, SMD, Copper
Finish:	White, Frosted
Lifespan:	50,000 hours




Optional: Yellow, Purple, Pink, Orange, 4000-6000K

#10650 RGB	#10653 Red
#10651 5000K	#10654 Blue
#10652 3000K	#10655 Green



Mini Neon Flex Tube - 1-3W

Watts (RGB):	1 - 3W / Foot
CCT:	3000K, 5000K, RGB
Voltage:	AC110 - 130V
Dimmable:	TRIAC
IP Rating:	IP65
Materials:	PVC, SMD, Copper
Finish:	White, Frosted
Lifespan:	50,000 hours




Optional: Yellow, Purple, Pink, Orange, 4000-6000K

#10656 RGB Mini	#10659 Red Mini
#10657 5000K Mini	#10660 Blue Mini
#10658 3000K Mini	#10661 Green Mini



RGB Strip Flex Tube - 3W

Watts:	3W / Foot
Lumens:	240lm/Foot
CCT:	RGB
Voltage:	AC110 - 130V
Dimmable:	TRIAC
IP Rating:	IP67
Materials:	PVC, SMD, Copper
Finish:	White, Clear
Lifespan:	50,000 hours



Optional: C-Channel, Clips, Amplifier, Controller, Connectors, 2700-5000K, Red, Yellow, Blue, Green


#10736 RGB

SES-LM110-XXXX-3




High Output AC Modules - 3W

Watts:	3W / Module
Lumens:	390lm
CCT:	3000K / 9000K
Voltage:	AC110V
Dimmable:	TRIAC
IP Rating:	IP54
Materials:	Aluminum, ABS
Finish:	White
Lifespan:	30,000 hours

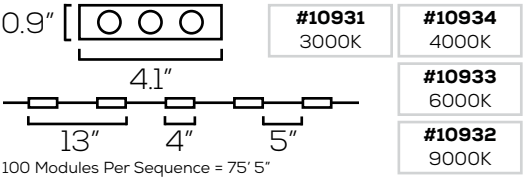


SES-LM110-B-3



High Output AC Modules - 3W

Watts:	3W / Module
Lumens:	390lm
CCT:	Blue / Green / Purple
Voltage:	AC110V
Dimmable:	TRIAC
IP Rating:	IP54
Materials:	Aluminum, ABS
Finish:	White
Lifespan:	30,000 hours

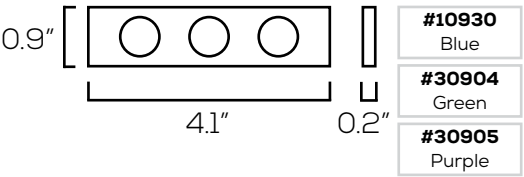

LED SPECIALTY LIGHTS

SARIN's Specialty Lights cover a diverse category of lighting hardware. These products can be used for indoor agriculture, to draw attention to building aesthetics, or just add a little more functionality to rooms.

Applications:

- Homes
- Hotels
- Restaurants
- Stores

Bulbs are sold separately for fixtures that require them.

▲ [Return to Table of Contents](#)




SES-GL02-480



Full Spectrum Grow Light - 480W

Watts:	480W
Photons:	1,248 μ mol/s
Efficacy:	2.6 μ mol/J
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP20
Materials:	Aluminum Alloy
Finish:	Silver, Clear
Lifespan:	50,000 hours




#30981
480W

SES-GL02-660



Full Spectrum Grow Light - 660W

Watts:	660W
Photons:	1,820 μ mol/s
Efficacy:	2.6 μ mol/J
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP20
Materials:	Aluminum Alloy
Finish:	Silver, Clear
Lifespan:	50,000 hours

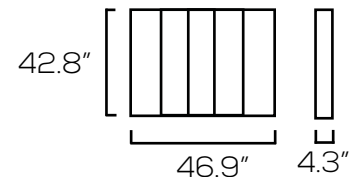


#10983
660W

SES-GL02-960



Full Spectrum Grow Light - 960W

Watts:	960W
Photons:	2,496 μ mol/s
Efficacy:	2.6 μ mol/J
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP20
Materials:	Aluminum Alloy
Finish:	Silver, Clear
Lifespan:	50,000 hours

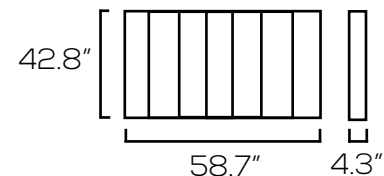


#30982
960W

SES-WPUSB-200



USB Wall Plate, 2 Ports

USB:	2 Ports
LED:	Charging Indicator
Amp:	Max 21 Amps / USB
Voltage:	AC100 – 240V
IP Rating:	IP20
Materials:	Fire-Proof Plastic
Finish:	White
Lifespan:	30,000 hours

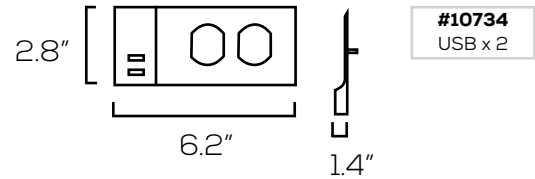


SES-WPNL-100



Night Light Wall Plate, Sensor - 0.5W

Watts:	0.5W
Lumens:	20lm
CCT:	3000K
Voltage:	AC90 – 264V
Dimmable:	No
IP Rating:	IP20
Materials:	Fire-Proof Plastic
Finish:	White
Lifespan:	40,000 hours

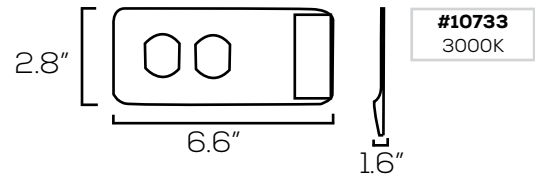


SES-PAR38-5000-60



High-Powered PAR38 Bulb - 60W

Watts:	60W
Lumens:	4,800 - 5,200lm
CCT:	5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, Glass
Finish:	White, Clear
Lifespan:	50,000 hours

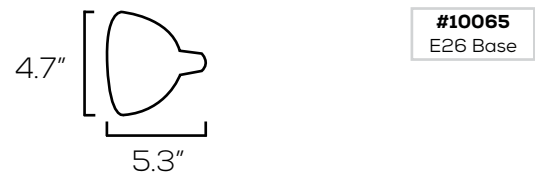


SES-TLS-HEAD



Track Head - E26

Watts:	6 - 10W
Bulb:	A19, PAR20, BR
Base:	E26
Voltage:	AC85 - 265V
Dimmable:	Bulb Dependent
IP Rating:	IP40
Materials:	Aluminum, Acrylic
Finish:	Black / White
Bulb Lifespan:	25,000 hours

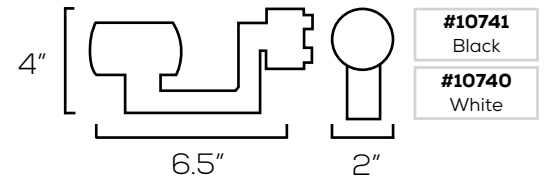


SES-TLS-RAIL



Track Rail, 3.3 ft, 4 ft, 6 ft, 8 ft

System:	3 Wire
Voltage:	AC85 - 265V
Materials:	Aluminum
Finish:	Black / White
Size:	3.3' / 4' / 6' / 8'
Included:	Mounting Screws

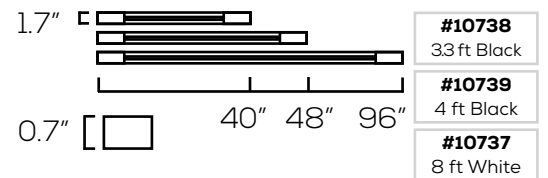


SES-PAR30D-5000-35



High-Powered PAR30 Bulb - 35W

Watts:	35W
Lumens:	2,300 - 3,200lm
CCT:	5000K
Voltage:	AC100 - 277V
Dimmable:	TRIAC
IP Rating:	IP20
Materials:	Aluminum, Glass
Finish:	White, Clear
Lifespan:	50,000 hours

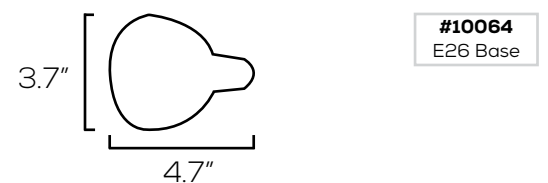


SES-PL-15W



Image Projector - 15W

Watts:	15W
Lumens:	f20lm/W
CCT:	6000K
Voltage:	AC85 – 265V
Dimmable:	No
IP Rating:	IP20
Materials:	Aluminum, Glass
Finish:	Black, Clear
Lifespan:	30,000 hours

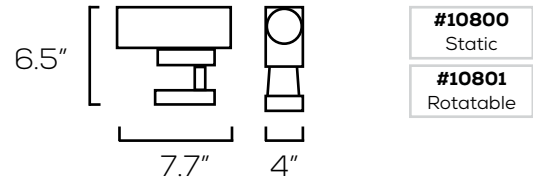


SES-PL-40WRT-40



Image Projector - 40W


Watts:	40W
Lumens:	f20lm/W
CCT:	6000K
Voltage:	AC85 – 265V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Black, Clear
Lifespan:	30,000 hours

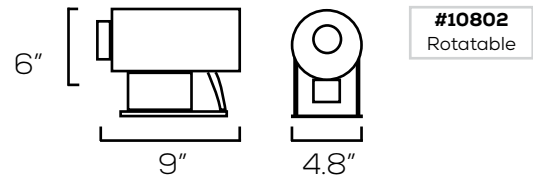


Custom Projector Slide

Details: Any JPG or PNG at a minimum of 400x400 pixels.

15W Projection Size / Distance

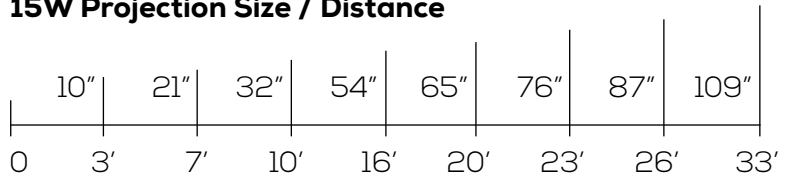


40W Projection Size / Distance

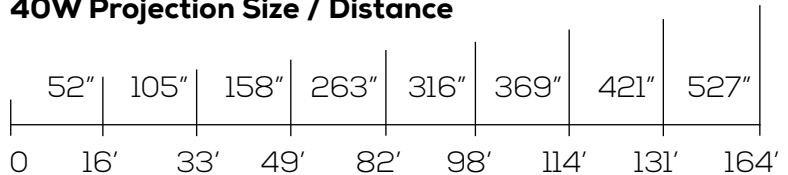


Manipulate light to build truly unforgettable environments
with designer glass, resin and terrazzo materials.



Interactive Terrazzo



Edge-Lit Surfaces



Imprinted Textures

Get Ideas



Iridescent Patterns



Geometric Refraction



Mirrored Reflection




Endless Possibilities

A SARIN Energy partnership



MIRAGE

OPTICAL REFRACTION TILES



EMBER

3D ILLUMINATED SURFACES

Create infinitely customizable
3D solid surface walls of any
size with non-repeating and
completely original designs.



A SARIN Energy partnership



EXTERIOR LIGHTING



Waterproof Lighting for Every Situation

SARIN's exterior LED lamps are weather-proof and sure to light the way for years. Impress and welcome guests by bringing modern refinement to the rugged outdoors. It's time to take control of your exterior with radiant displays that have the power to captivate and turn night into day.

These lights are far more energy-efficient than standard halogen and halide lights. Whether you're looking to illuminate areas for safety or add a splash of color to enhance your architecture, SARIN has a solution for you! You can even use a photocell sensor with your lights so they automatically turn on at night to save you the hassle.

We are dedicated to ensuring that your lighting needs are met. Nearly all of our lights are available in color temperatures ranging from 2700-6500K. Many of our products can be custom ordered with various sizes, colors, wattages, accessories, diffusers, finishes, and features. For more information about optional customizations, call us at [855-997-2746](tel:855-997-2746).

LED WALL LAMPS

SARIN's LED Wall Lamps are perfect for adding splashes of light or color to any wall. These lights are designed with style and durability in mind. They are sure to enhance the allure of your building for years to come! All of the lights in this section have optional finishes.

Applications:

- Hotels
- Restaurants
- Places of Worship
- Hospitals

Bulbs are sold separately for fixtures that require them.

[▲ Return to Table of Contents](#)




SES-WL2012C-GU10



Wall Sconce, WL2012C - GU10

Watts:	Bulb Dependent
Bulb:	MR16
Base:	GU10
Voltage:	AC100 - 240V
Dimmable:	Bulb Dependent
IP Rating:	IP44
Materials:	Stainless Steel, Glass
Finish:	Stainless Steel, Clear
Bulb Lifespan:	25,000 hours

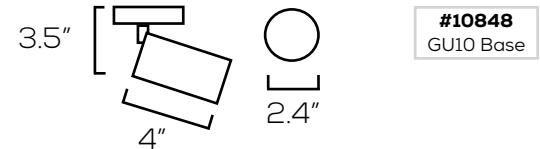


Optional: Finish Color

SES-WL2012A-GU10



Wall Sconce, WL2012A - GU10

Watts:	Bulb Dependent
Bulb:	MR16
Base:	GU10
Voltage:	AC100 - 240V
Dimmable:	Bulb Dependent
IP Rating:	IP44
Materials:	Stainless Steel, Glass
Finish:	Stainless Steel, Clear
Bulb Lifespan:	25,000 hours




Optional: Finish Color

SES-WL2012B-2*GU10



Wall Sconce, WL2012B - GU10

Watts:	Bulb Dependent
Bulb:	MR16
Base:	GU10 x 2
Voltage:	AC100 - 240V
Dimmable:	Bulb Dependent
IP Rating:	IP44
Materials:	Stainless Steel, Glass
Finish:	Stainless Steel, Clear
Bulb Lifespan:	25,000 hours

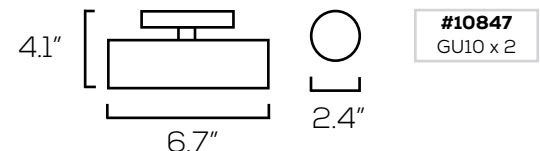


Optional: Finish Color

SES-WL3201-6-3000



Wall Sconce, WL3201 - 6W

Watts:	6W
Lumens:	230lm
CCT:	3000K
Voltage:	AC120V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Stainless Steel
Lifespan:	30,000 hours



#10843
3000K


Optional: Finish Color

SES-WL2013R-7-CCT



CCT Wall Sconce, WL2013R - 7W

Watts:	7W
Lumens:	260lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours



#11159
CCT


Optional: Finish Color

SES-WL2012R-7-CCT



CCT Wall Sconce, WL2012R - 7W

Watts:	7W
Lumens:	350lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours



#11157
CCT


Optional: Finish Color

SES-WL2201-6.5-CCT



CCT Wall Sconce, WL2201 - 6.5W

Watts:	6.5W
Lumens:	400lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Brown
Lifespan:	30,000 hours



#11151
CCT


Optional: Finish Color

SES-WL2013S-7-CCT



CCT Wall Sconce, WL2013S - 7W

Watts:	7W
Lumens:	260lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours



#11160
CCT


Optional: Finish Color

SES-WL2012S-7-CCT



CCT Wall Sconce, WL2012S - 7W

Watts:	7W
Lumens:	350lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours



#11158
CCT


Optional: Finish Color

SES-WL2501-6-CCT



CCT Wall Sconce, WL2501 - 6W

Watts:	6.5W
Lumens:	130lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100-240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Brown, Frosted
Lifespan:	30,000 hours



#11156
CCT


Optional: Finish Color

SES-WL2534X-X-CCT



Wall Sconce, WL2534X - 7W / 10W

Watts:	7W / 10W
Lumens:	300lm / 430lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100-240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours



#11155
7W

#11154
10W


Optional: Finish Color

SES-WL2202-5-3000



Wall Sconce, WL2202 - 5W

Watts:	5W
Lumens:	450lm
CCT:	3000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Brown, Clear
Lifespan:	30,000 hours



#10836
3000K


Optional: Finish Color

SES-WL2034SN-CCT-4



CCT Wall Sconce, WL2034SN - 4W

Watts:	4W
Lumens:	180lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100-240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Brown, Frosted
Lifespan:	30,000 hours



#10844
CCT


Optional: Finish Color

SES-WL2204-6.5-3000



Wall Sconce, WL2204 - 6.5W

Watts:	6.5W
Lumens:	500lm
CCT:	3000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Brown, Clear
Lifespan:	30,000 hours



#10831
3000K


Optional: Finish Color

SES-WL2034S-CCT-6.5



CCT Wall Sconce, WL2034S - 6.5W

Watts:	6.5W
Lumens:	380lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	White, Frosted
Lifespan:	30,000 hours



#10845
CCT


Optional: Finish Color

SES-WL2551-6.5-CCT



CCT Wall Sconce, WL2551 - 6.5W

Watts:	6.5W
Lumens:	280lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Light Gray
Lifespan:	30,000 hours

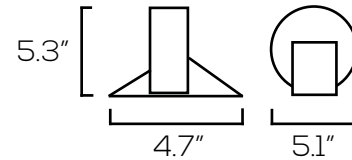

#11150
CCT


Optional: Finish Color

SES-WL2027QM-10-CCT



CCT Wall Sconce, WL2027QM - 10W

Watts:	10W
Lumens:	600lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	White
Lifespan:	30,000 hours



#11152
CCT


Optional: Finish Color

SES-WL2027SM-10-CCT



CCT Wall Sconce, WL2027SM - 10W

Watts:	10W
Lumens:	450lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Dark Brown
Lifespan:	30,000 hours



#11153
CCT

Optional: Finish Color

SES-UDW1-2E26-X




Camden
Series



Wall Sconce, UDW1 - E26

Watts:	Bulb Dependent
Bulb:	A19, PAR, BR
Base:	E26 x 2
Voltage:	AC120 - 277V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Materials:	Stainless Steel, PC
Finish:	Silver / Black
Bulb Lifespan:	25,000 hours

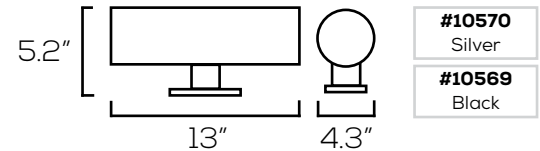

Optional: Finish Color, Photocell

SES-UDW2-2E26-X




Camden
Series



Wall Sconce, UDW2 - E26

Watts:	Bulb Dependent
Bulb:	A19, PAR, BR
Base:	E26 x 2
Voltage:	AC120 - 277V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Materials:	Stainless Steel, PC
Finish:	Silver / Black
Bulb Lifespan:	25,000 hours

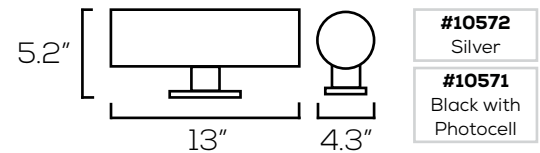

Optional: Finish Color, Photocell

SES-UDW3-2E26-S




Camden
Series



Wall Sconce, UDW3 - E26

Watts:	Bulb Dependent
Bulb:	A19, PAR, BR
Base:	E26 x 2
Voltage:	AC120 - 277V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Materials:	Stainless Steel, PC
Finish:	Silver / Black
Bulb Lifespan:	25,000 hours

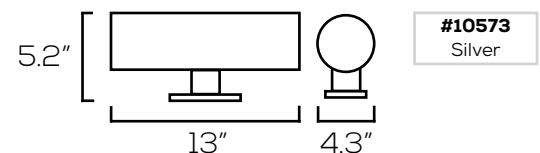

Optional: Finish Color, Photocell

SES-WL1661S-XXXX-12




Cambridge
Series



Wall Sconce, WL1661S - 12W

Watts:	12W
Lumens:	860lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours



Optional: Finish Color

SES-WL2401-E26




Cambridge
Series



Wall Sconce, WL2401 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type
Base:	E26
Voltage:	AC110 - 120V
Dimmable:	Bulb Dependent
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Bulb Lifespan:	25,000 hours



Optional: Finish Color

SES-WL-15003-XXXX-10




Archway
Series



Wall Sconce, 15003 - 10W

Watts:	10W
Lumens:	660lm
CCT:	3000K / 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours



Optional: Finish Color

SES-WL2342-2E26




Cambridge
Series



Wall Sconce, WL2342 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type
Base:	E26 x 2
Voltage:	AC110 - 120V
Dimmable:	Bulb Dependent
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Bulb Lifespan:	25,000 hours



#10795
E26 x 2

Optional: Finish Color

SES-WL3511-E26




Archway
Series



Wall Sconce, WL3511 - E26

Watts:	Bulb Dependent
Bulb:	G50
Base:	E26
Voltage:	AC110 - 120V
Dimmable:	Bulb Dependent
IP Rating:	IP44
Materials:	Iron, Glass
Finish:	Dark Gray, Clear
Bulb Lifespan:	25,000 hours

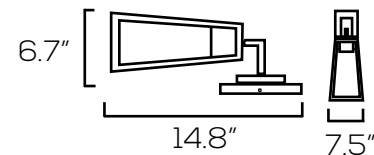

#10788
E26 Base

Optional: Finish Color

SES-WL-17309-XXXX




Archway
Series



Wall Sconce, 17309 - 10W

Watts:	10W
Lumens:	680lm
CCT:	3000K / 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours

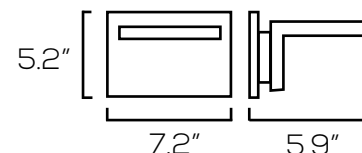

#10553
3000K

#10552
5000K

Optional: Finish Color, Photocell

SES-WL1372-3000-7.5




Archway
Series



Wall Sconce, WL1372 - 7.5W

Watts:	7.5W
Lumens:	330lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours




Optional: Finish Color

SES-UPD-36X1RGB-S



RGB Wall Sconce, UPD - 36W

Watts:	36W
CCT:	RGB
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Bronze, Clear
Lifespan:	50,000 hours

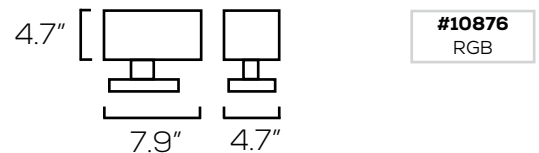


Optional: Finish Color

SES-UPD-36X1RGB-2S



RGB Wall Sconce, UPD - 72W

Watts:	72W
CCT:	RGB
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Bronze, Clear
Lifespan:	50,000 hours

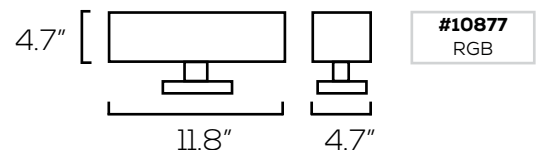

Optional: Finish Color

SES-WL1944-XXXX-13




Cambridge
Series



Wall Sconce, WL1944 - 13W

Watts:	13W
Lumens:	700lm
CCT:	3000K / 5000K
Voltage:	AC110 - 120V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PMMA
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours

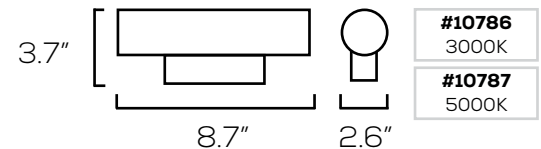

Optional: Finish Color

SES-UPD-6X1X-2S




Finsbury
Series



Wall Sconce, UPD - 12W

Watts:	12W
Lumens:	1,200lm / 1,300lm
CCT:	3000K / 5000K / RGB
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Bronze, Clear
Lifespan:	50,000 hours

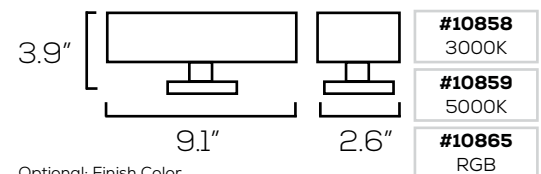

Optional: Finish Color

SES-UPD-5X1X-2S




Finsbury
Series



Wall Sconce, UPD - 10W

Watts:	10W
Lumens:	1,000lm / 1,100lm
CCT:	3000K / 5000K / RGB
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Bronze, Clear
Lifespan:	50,000 hours

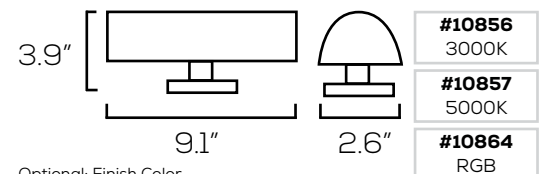

Optional: Finish Color

SES-UPD-COB25WW




Finsbury Series



Wall Sconce, UPD - 25W

Watts:	25W
Lumens:	2,500lm
CCT:	3000K / 5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10855
3000K

#10866
5000K

Optional: Finish Color

SES-UPD-36X1RGB




Finsbury Series



RGB Wall Sconce, UPD - 36W

Watts:	36W
CCT:	RGB
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10852
RGB

Optional: Finish Color

SES-UPD-6X1RGB-2




Finsbury Series



RGB Wall Sconce, UPD - 12W

Watts:	12W
CCT:	RGB
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10863
RGB

Optional: Finish Color

SES-UPD-12X1RGB-2




Finsbury
Series



RGB Wall Sconce, UPD - 24W

Watts:	24W
CCT:	RGB
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10850
RGB

Optional: Finish Color

SES-UPD-COB25X-2X




Finsbury
Series



Wall Sconce, UPD - 50W

Watts:	50W
Lumens:	5,000lm / 5,100lm
CCT:	3000K / 5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	White / Bronze, Clear
Lifespan:	50,000 hours

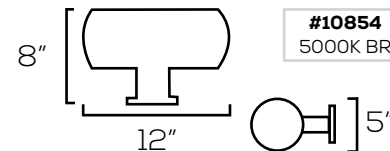

#10854
5000K BR

#10861
3000K W

#10862
5000K W

#10853
3000K BR

Optional: Finish Color

SES-UPD-36X1RGB-2




Finsbury
Series



RGB Wall Sconce, UPD - 72W

Watts:	72W
CCT:	RGB
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	White / Bronze, Clear
Lifespan:	50,000 hours



#10851
Bronze

#10860
White

Optional: Finish Color

LED WALL PACKS

SARIN's LED Wall Packs are specially designed to be mounted on exterior walls and illuminate pathways below. They are protected from all weather conditions, including rain and snow, and will provide efficient lighting for a long time.

Applications:

- Offices
- Hotels
- Restaurants
- Stores

▲ [Return to Table of Contents](#)



SES-SWP-XXXX-55



Hackney
Series



Wall Pack, SWP - 55W

Watts:	55W
Lumens:	6,800lm
CCT:	3000K / 4000K / 5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Dark Brown, Clear
Lifespan:	50,000 hours



Optional: Finish, Surge Protector, Photocell, 35W, 40W, 60W, 100W

*With Emergency Driver

#10496 4000K	#10491 3000K Sen.
#10518 5700K	#10492 4000K Sen.
#10520* 5700K	#10489 5700K Sen.

SES-SWP-XXXX-80



Hackney
Series



Wall Pack, SWP - 80W

Watts:	80W
Lumens:	9,650lm
CCT:	4000K / 5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Dark Brown, Clear
Lifespan:	50,000 hours



Optional: Finish Color, Surge Protector, Photocell, 35W, 40W, 60W, 100W

#10497 4000K
#10519 5700K

SES-SWP-XXXX-120



Hackney
Series



Wall Pack, SWP - 120W

Watts:	120W
Lumens:	14,500lm
CCT:	4000K / 5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Dark Brown, Clear
Lifespan:	50,000 hours



Optional: Finish Color, Surge Protector, Photocell, 35W, 40W, 60W, 100W

#10498 4000K	#10494 3000K Sen.
#10499 5700K	#10495 4000K Sen.
	#10493 5700K Sen.

SES-WP-5000-26




Hughes
Series



Wall Pack, Photocell - 26W

Watts:	26W
Lumens:	2,800lm
CCT:	5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Dark Gray, Clear
Lifespan:	50,000 hours



#10510
5000K

SES-WPR01-5700-25




Oxford
Series



Rotatable Wall Pack - 25W

Watts:	25W
Lumens:	3,375lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours

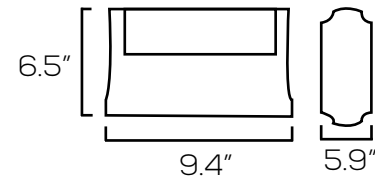

#11171
5700K

SES-WPR01-5700-40




Oxford
Series



Rotatable Wall Pack - 40W

Watts:	40W
Lumens:	5,600lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours

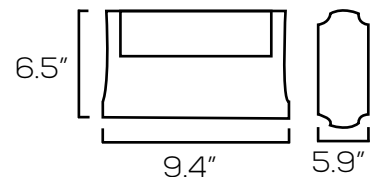

#11174
5700K

SES-WP-5000-18




Hughes
Series



Wall Pack, Photocell - 18W

Watts:	18W
Lumens:	2,140lm
CCT:	5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Dark Gray, Clear
Lifespan:	50,000 hours



#10509
5000K

SES-WPR01-5700-60




Oxford
Series



Double Rotatable Wall Pack - 60W

Watts:	60W
Lumens:	8,400lm
CCT:	5700K
Voltage:	AC120 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#11172
5700K

SES-WPR01-5700-80




Oxford
Series



Double Rotatable Wall Pack - 80W

Watts:	80W
Lumens:	11,200lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#11175
5700K

SES-WPN-5700-120




Oxford Series



Wall Pack, WPN - 120W

Watts:	120W
Lumens:	14,470lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#10505
5700K

SES-WP05-5700-35




Oxford Series



Wall Pack, WP05 - 35W

Watts:	35W
Lumens:	4,050lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Brown, Clear
Lifespan:	50,000 hours



#10501
5700K

SES-WP05-5700-55




Oxford Series



Wall Pack, WP05 - 55W

Watts:	55W
Lumens:	6,180lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Brown, Clear
Lifespan:	50,000 hours



#10502
5700K

SES-WPN-5700-80




Oxford
Series



Wall Pack, WPN - 80W

Watts:	80W
Lumens:	10,520lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours

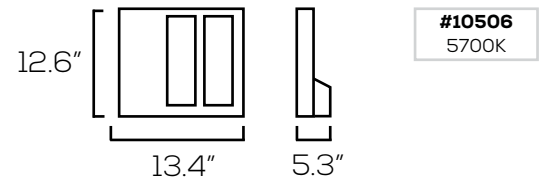

SES-MWP03-20WAF1




Oxford
Series



Mini Wall Pack, Photocell - 20W

Watts:	20W
Lumens:	2,700lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Frosted
Lifespan:	50,000 hours

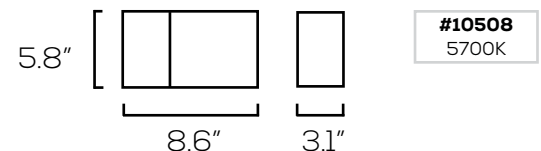

Optional: Finish Color, Clear Lens, 15W

SES-MWP03-30WAF1




Oxford
Series



Mini Wall Pack, Photocell - 30W

Watts:	30W
Lumens:	3,700lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Frosted
Lifespan:	50,000 hours

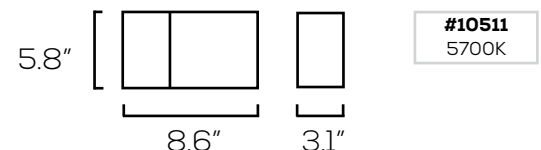

Optional: Finish Color, Clear Lens, 15W

LED FLOOD & POLE LIGHTS

SARIN's LED Flood and Pole Lights are used to replace high pressure sodium flood lights and metal halides and can provide an energy savings of up to 70%. These flood lights will shine in the toughest weather conditions with an impenetrable housing and powder-coated finish. Say goodbye to the hassle of frequently using maintenance lift trucks.

Applications:

- Parking Lots
- Stadiums
- Billboards
- Playgrounds

[▲ Return to Table of Contents](#)




SES-SB03D-5700-150



Shoebox Light, SB03D - 150W

Watts:	150W
Lumens:	20,250lm
CCT Switch:	5700K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#10937 5700K
#40937-A Slip Fitter
#40937-C Extruded Arm


Optional: Photocell, Surge Protector, Motion Sensor

SES-SB03D-5700-300



Shoebox Light, SB03D - 300W

Watts:	300W
Lumens:	40,500lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#10938 5700K
#40937-A Slip Fitter
#40937-C Extruded Arm


Optional: Photocell, Surge Protector, Motion Sensor

SES-SB03D-5700-450



Shoebox Light, SB03D - 450W

Watts:	450W
Lumens:	56,250lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	0 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#10949 5700K
#40937-B Slip Fitter


Optional: Photocell, Surge Protector, Motion Sensor

SES-LNWW-RGBW-3



RGBW Rigid Smart Rail - 3W

Watts:	3W
Lumens:	54lm
CCT:	RGB, 3000K, 6500K
Voltage:	AC24V
Dimmable:	DMX512
IP Rating:	IP65
Materials:	Aluminum, PMMA
Finish:	White, Frosted
Lifespan:	30,000 hours



#11230
RGBW


Optional: Cables, DMX512 Amplifier

SES-LNWW-RGBW-7.5



RGBW Rigid Smart Rail - 7.5W

Watts:	7.5W
Lumens:	135lm
CCT:	RGB, 3000K, 6500K
Voltage:	AC24V
Dimmable:	DMX512
IP Rating:	IP65
Materials:	Aluminum, PMMA
Finish:	White, Frosted
Lifespan:	30,000 hours

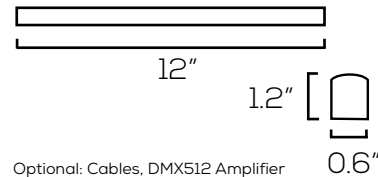

#11231
RGBW


Optional: Cables, DMX512 Amplifier

SES-LNWW-RGBW-12



RGBW Rigid Smart Rail - 12W

Watts:	12W
Lumens:	216lm
CCT:	RGB, 3000K, 6500K
Voltage:	AC24V
Dimmable:	DMX512
IP Rating:	IP65
Materials:	Aluminum, PMMA
Finish:	White, Frosted
Lifespan:	30,000 hours

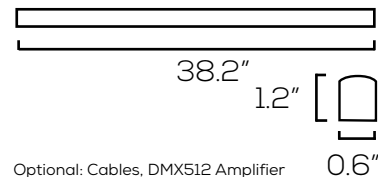

#11232
RGBW

Optional: Cables, DMX512 Amplifier

SES-WN-CPM-03-3000K




CE FC



Chain Light - 3W

Watts:	3W / Module
Lumens:	100lm
CCT:	3000K
Voltage:	DC24V
Dimmable:	No
IP Rating:	IP67
Materials:	Aluminum
Finish:	Black, Silver
Lifespan:	50,000 hours




#10927
3000K

Optional: Finish Color, 56 Links Max Per Driver

SES-WN-CPM-03-RGB




CE FC



RGBW Chain Light - 3W

Watts:	3W / Module
Lumens:	100lm
CCT:	RGB / RGBW
Voltage:	DC24V
Dimmable:	Remote
Strip IP Rating:	IP67
Materials:	Aluminum
Finish:	Black, Silver
Lifespan:	50,000 hours



#10928
RGB

#10929
RGBW

SES-WIN-8W-XXXX




CE



Window Accent Light - 8W

Watts:	8W
Lumens:	430lm
CCT:	5000K / RGB / Red / Blue
Voltage:	AC110 - 240V
Dimmable:	No
IP Rating:	IP66
Materials:	Aluminum, Glass
Finish:	Black, Clear
Lifespan:	30,000 hours



#10721
5000K

#10720
RGB

#10722
Red

#10723
Blue


Optional: Finish Color

SES-LWSIM-RGBWX-36



RGBW Wall Washer, 3.3 ft - 36W

Watts:	36W
Lumens:	2,880lm
CCT:	RGB, 3000K, 6500K
Voltage:	AC100 - 277V
Dimmable:	DMX512
IP Rating:	IP65
Materials:	Aluminum
Finish:	Black
Lifespan:	>30,000 hours




Optional: Remote Control or P2 System

SES-LWSIM-RGBWX-72



RGBW Wall Washer, 3.3 ft - 72W

Watts:	72W
Lumens:	5,760lm
CCT:	RGB, 3000K, 6500K
Voltage:	AC100 - 277V
Dimmable:	DMX512
IP Rating:	IP65
Materials:	Aluminum
Finish:	Black
Lifespan:	>30,000 hours




Optional: Remote Control or P2 System

SES-DR-TG-050-36W



RGB Wall Washer - 36W

Watts:	36W
CCT:	RGB
Voltage:	AC100 - 240V
Dimmable:	DMX512
IP Rating:	IP65
Materials:	Metal, Glass
Finish:	White, Clear
Lifespan:	25,000 hours

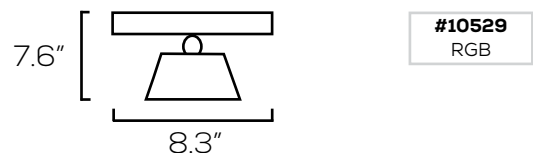

Optional: 18W

SES-FL01-RGB-36-30D/90D




Piccadilly Series



RGB Flood Light, FL01 - 36W

Watts:	36W
Lumens:	2,880lm
CCT:	RGB
Voltage:	AC100 - 277V
Dimmable:	PWM
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Gray, Clear
Lifespan:	30,000 hours



#10394
30° RGB

#10397
90° RGB

Optional: Finish, Beam Angle, 2700-6500K, DMX

SES-FL05-RGB-60-30D/90D




Piccadilly Series



RGB Flood Light, FL05 - 60W

Watts:	60W
Lumens:	4,800lm
CCT:	RGB
Voltage:	AC100 - 277V
Dimmable:	PWM
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Gray, Clear
Lifespan:	30,000 hours



#10395
30° RGB

#10398
90° RGB

Optional: Finish, Beam Angle, 2700-6500K, DMX

SES-FL07-RGB-100-30D/90D




Piccadilly Series



RGB Flood Light, FL07 - 100W

Watts:	100W
Lumens:	8,000lm
CCT:	RGB / RGBW
Voltage:	AC100 - 277V
Dimmable:	PWM
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Gray, Clear
Lifespan:	30,000 hours



#10396
30° RGB

#10399
90° RGB

#10875
90° RGBW

Optional: Finish, Beam Angle, 2700-6500K, DMX

SES-FL06-30WCH8-BRAMCA345




Edgware
Series



CCT Flood Light, FL06 - 30W

Watts:	30W
Lumens:	4,200lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10867
CCT

Optional: Finish Color, Surge Protector, 15W, 70W

SES-FL06-50WCH8-BRAMCA345




Edgware
Series



CCT Flood Light, FL06 - 50W

Watts:	50W
Lumens:	7,500lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10868
CCT

Optional: Finish Color, Surge Protector, 15W, 70W

AST-FL06-50WXYA1-acde




Edgware
Series



CCT Flood Light, FL06 - 50W

Watts:	50W
Lumens:	7,000lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10373
CCT

Optional: Finish Color, Surge Protector, 15W, 70W

SES-FL06-30WCH8-BRFMCA345




Edgware
Series



CCT Flood Light, FL06 - 30W

Watts:	30W
Lumens:	4,200lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10363
CCT


Optional: Finish Color, Surge Protector, 15W, 70W

SES-SP-400WD-S-F-5700K



Stadium Light, SP - 400W

Watts:	400W
Lumens:	52,000lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	Red, Black, Clear
Lifespan:	54,000 hours



#10371*
5700K

*With Surge Protector


Optional: Laser, 15-120° Lens, Bracket

SES-SP-500WD-F-5700K



Stadium Light, SP - 500W

Watts:	500W
Lumens:	65,000lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	Red, Black, Clear
Lifespan:	54,000 hours



#10374*
5700K

*With Surge Protector


Optional: Laser, 15-120° Lens, Bracket

SES-SP-5700-500-XX



Stadium Light, SP - 500W

Watts:	500W
Lumens:	65,000lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	54,000 hours




#10381
30° Beam

#10384
45° Beam


Optional: Finish, Photocell, Surge Protector, Dimmer

SES-SP-5700-750-XX



Stadium Light, SP - 750W

Watts:	750W
Lumens:	97,500lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	54,000 hours



#10382
30° Beam

#10385
45° Beam


Optional: Finish, Photocell, Surge Protector, Dimmer

SES-SP-5700-1250-XX



Stadium Light, SP - 1,250W

Watts:	1,250W
Lumens:	156,250lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	54,000 hours



#10383
30° Beam

#10386
45° Beam


Optional: Finish, Photocell, Surge Protector, Dimmer

SES-SP02-750-5700-ADM



Stadium Light, SP02 - 750W

Watts:	750W
Lumens:	112,500lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10943
5700K


Optional: Surge Protector, Cover, 500W, 1000W

SES-SBGF-150WXYA1



Shoebox Light, SBGF - 150W

Watts:	300W
Lumens:	22,500lm
CCT:	4000K / 5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#10375*
4000K

#10376*
5700K

*Mount Not Included


Optional: Finish Color, Photocell, Surge Protector, Motion Sensor, Mount, High Voltage, 100W

SES-SBGF-300WXYA1



Shoebox Light, SBGF - 300W

Watts:	300W
Lumens:	45,000lm
CCT:	4000K / 5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#10377*
4000K

#10378*
5700K

*Mount Not Included


Optional: Finish Color, Photocell, Surge Protector, Motion Sensor, Mount, High Voltage, 200W, 240W

SES-PL-150W-5700KCXXYYZ3



Slim Shoebox Light, PL - 150W

Watts:	150W
Lumens:	21,000lm
CCT:	5700K
Voltage:	AC100-277V
Dimmable:	1-10V
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	Light Brown, Clear
Lifespan:	50,000 hours



#10359
5700K

#40456-A
Extruded Arm

#40456-D
Slip Fitter


Optional: Finish Color, Photocell, Surge Protector, 80W, 100W, 185W, 240W

SES-PL-300W-5700KCXXYYZ3



Slim Shoebox Light, PL - 300W

Watts:	300W
Lumens:	41,400lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	Light Brown, Clear
Lifespan:	50,000 hours



#10360
5700K

#40456-A
Extruded Arm

#40456-D
Slip Fitter


Optional: Finish Color, Photocell, Surge Protector, 80W, 100W, 185W, 240W

SES-PL-500W-5700KCXXYYZ3



Slim Shoebox Light, PL - 500W

Watts:	500W
Lumens:	69,000lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP66
Materials:	Aluminum, PC
Finish:	Light Brown, Clear
Lifespan:	50,000 hours



*With Slip Fitter Mount

#10456*
5700K

#40456-A
Extruded Arm

#40456-B
Large Yoke


Optional: Finish Color, Photocell, Surge Protector, 80W, 100W, 185W, 240W

SES-GS02B-55WACGA1-abcde



CCT Garden Light, GS02B - 55W

Watts:	55W
Lumens:	7,150lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Black, Clear
Lifespan:	50,000 hours



#10387
CCT


Optional: Finish Color, Photocell, 35W, 75W

SES-GS02-100WFAT2F1-abcde



Garden Light, GS02B - 100W

Watts:	100W
Lumens:	12,000lm
CCT:	4000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#10388
4000K


Optional: Finish Color, Photocell

SES-GS02-150WSAT2A1-abcde



Garden Light, GS02B - 150W

Watts:	150W
Lumens:	18,000lm
CCT:	4000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours



#10389
4000K

Optional: Finish Color, Photocell

SES-SB5-5700-100T3




Edgware Series



Shoebox Light, SB5 - 100W

Watts:	100W
Lumens:	13,520lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10462
4000K

#10418
5700K

Optional: Finish Color, Surge Protector, Mount

SES-SB5-5700-120T3




Edgware Series



Shoebox Light, SB5 - 120W

Watts:	120W
Lumens:	16,240lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10463
4000K Cap

#10420
5700K Cap

#10419
5700K

Optional: Finish Color, Photocell, Surge Protector

SES-SB5-5700-150T3




Edgware Series



Shoebox Light, SB5 - 150W

Watts:	150W
Lumens:	19,530lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10464
4000K Cap

#10421
5700K Cap

Optional: Finish Color, Photocell, Surge Protector

SES-SB5-5700-185T3




Edgeware
Series




Shoebox Light, SB5 - 185W

Watts:	185W
Lumens:	25,090lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours

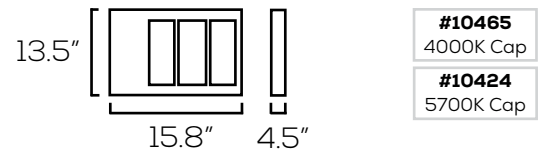

Optional: Finish Color, Photocell, Surge Protector

SES-SB5-5700-240T3M

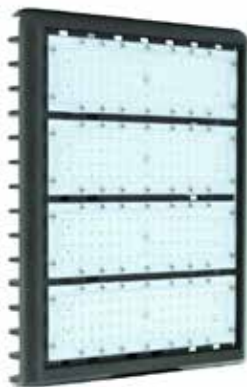


Edgeware
Series




Shoebox Light, SB5 - 240W

Watts:	240W
Lumens:	32,980lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours

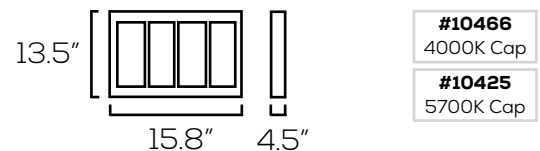

Optional: Finish Color, Photocell, Surge Protector

SES-SB5-5700-300T3

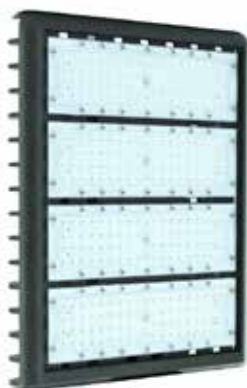


Edgeware
Series




Shoebox Light, SB5 - 300W

Watts:	300W
Lumens:	38,780lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours

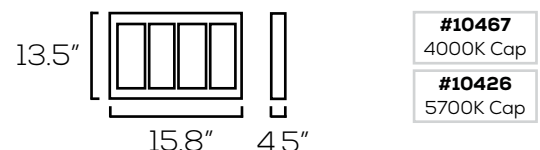


Optional: Finish Color, Photocell, Surge Protector

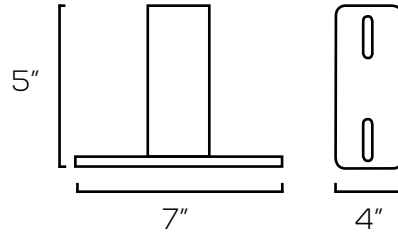

Flat Tenon, Rectangle

Compatibility:	Square Pole, Wall
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel


#10745
Rectangle

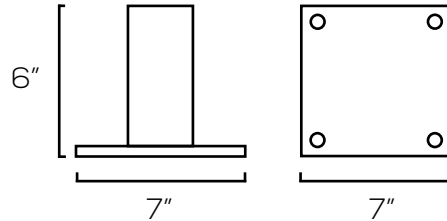

Flat Tenon, Square

Compatibility:	Square Pole, Wall
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel

#10746
Square

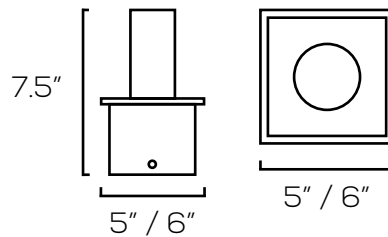


External Tenon, Square

Compatibility:	4" / 5" Square Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel

#10748
4"


#10747
5"



Internal Tenon, Square

Compatibility:	4" Square Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel


#10756
4"



External Tenon, Round

Compatibility:	4" Round Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel


#10750
4"

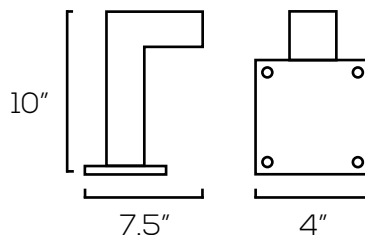

90° Bracket, Short

Compatibility:	Square Pole, Wall
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel

#10751
90°

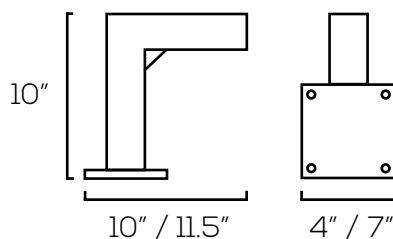


90° Bracket, Long

Compatibility:	Square Pole, Wall
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel

#10961
4"


#10752
7"

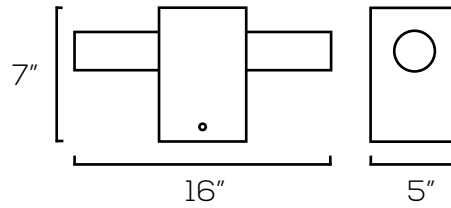

90° Two Head Bracket, Square

Compatibility: 4" Square Pole
Slip Fitter Size: 2 3/8" Minimum
Materials: Bronzed Steel

#10749
4"

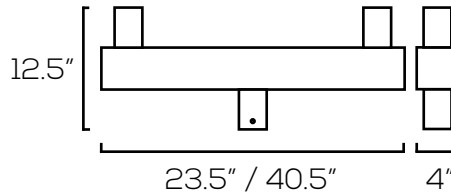


Two Head Bullhorn, Round

Compatibility: 4" Round Pole
Slip Fitter Size: 2 3/8" Minimum
Materials: Bronzed Steel

#10957
23.5"


#10744
40.5"

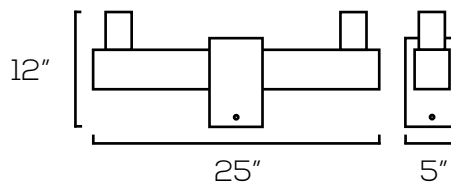

Two Head Bullhorn, Square

Compatibility: 4" Square Pole
Slip Fitter Size: 2 3/8" Minimum
Materials: Bronzed Steel


#10958
4"

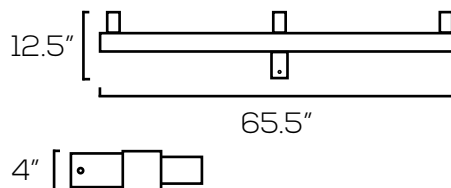

Three Head Bullhorn, Round

Compatibility: 4" Round Pole
Slip Fitter Size: 2 3/8" Minimum
Materials: Bronzed Steel


#10964
4"

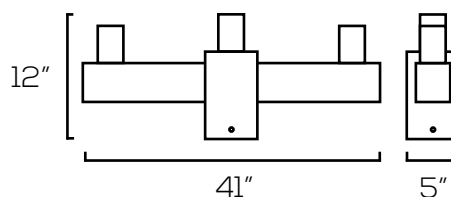

Three Head Bullhorn, Square

Compatibility: 4" Square Pole
Slip Fitter Size: 2 3/8" Minimum
Materials: Bronzed Steel


#10959
4"

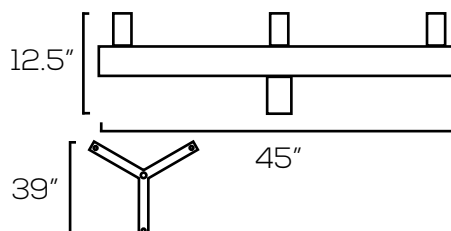

120° Three Head Bullhorn, Round

Compatibility: 4" Round Pole
Slip Fitter Size: 2 3/8" Minimum
Materials: Bronzed Steel

#10965
4"

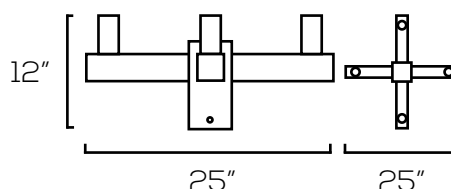

90° Four Head Bullhorn, Square

Compatibility: 4" Square Pole
Slip Fitter Size: 2 3/8" Minimum
Materials: Bronzed Steel

#10960
4"

LED SOLAR LIGHTS

SARIN's LED Solar Lights are perfect for remote locations that do not have a power source or to reduce energy costs. These lights can run for days on one charge as long as they get access to direct sunlight. Extra care has been taken to ensure the highest degree of reliability for solar LED lights. All of these fixtures have replaceable batteries.

Applications:

- Area Lighting
- Street Lighting
- Isolated Locations
- Parking Lots
- Sidewalks

▲ [Return to Table of Contents](#)



• Warranty Covers Product & Battery •




SES-SWL2-15-6



Solar Wall Light, SWL2 - 15W

Watts:	15W
Lumens:	1,600lm
CCT:	6000K
Working Modes:	3
Battery:	10,800mAh Li-ion
IP Rating:	IP65
Materials:	Aluminum, ABS, PC
Finish:	Black, Clear
Lifespan:	35,000 hours




#10370
6000K PIR

SES-SSLPR-40-6000



Solar Area Light, SSLPR - 40W

Watts:	40W
Lumens:	4,800lm
CCT:	6000K
Working Modes:	2
Battery:	12,000mAh LiFePO4
IP Rating:	IP65
Materials:	Aluminum, ABS, PC
Finish:	Black, Clear
Lifespan:	35,000 hours

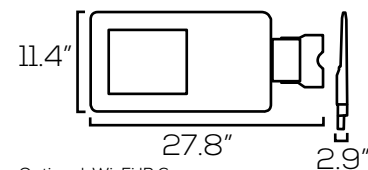

#10368
6000K PIR

#10367
IP Camera PIR


Optional: Wi-Fi IP Camera

SES-SSLSK-80-6000



Adjustable Solar Light, SSLSK - 80W

Watts:	80W
Lumens:	12,000lm
CCT:	6000K
Working Modes:	3
Battery:	32,000mAh Li-ion
IP Rating:	IP65
Materials:	Aluminum, ABS, PC
Finish:	Black, Clear
Lifespan:	35,000 hours



#10369
6000K PIR


Optional: Double Head, 40W, 120W

SES-SBL-RGBWW-2.8-15-White



RGBW Solar Bollard, SBL2 - 2.8W

Watts:	2.8W
Lumens:	360lm
CCT Switch:	RGB, 3000K, 6500K
Working Modes:	Automatic / Remote
Battery:	12,000mAh LiFeP04
IP Rating:	IP65
Materials:	Aluminum, ABS, PC
Finish:	Brown, Clear
Lifespan:	50,000+ hours



#10364
15 in


Optional: Finish Color

SES-SBL2-RGBW-1.5-24



RGBW Solar Bollard, SBL2 - 1.5W

Watts:	1.5W
Lumens:	170lm
CCT Switch:	RGB, 3000K, 6500K
Working Modes:	Automatic / Remote
Battery:	12,000mAh LiFeP04
IP Rating:	IP65
Materials:	Aluminum, ABS, PC
Finish:	Brown, Clear
Lifespan:	50,000+ hours



#10628
24 in

Optional: Finish Color

SES-SBL2-RGBW-1.5-35



RGBW Solar Bollard, SBL2 - 1.5W

Watts:	1.5W
Lumens:	170lm
CCT Switch:	RGB, 3000K, 6500K
Working Modes:	Automatic / Remote
Battery:	12,000mAh LiFeP04
IP Rating:	IP65
Materials:	Aluminum, ABS, PC
Finish:	Brown, Clear
Lifespan:	50,000+ hours



#10629
35 in


Optional: Finish Color

SES-SWL-1.5W-B



Mini Solar Flood Light, SWL - 1.5W

Watts:	1.5W
Lumens:	200lm
CCT:	6000K, (3000K Back)
Working Modes:	1
Battery:	1,200mAh Li-ion
IP Rating:	IP65
Materials:	ABS, PC
Finish:	White / Black / Silver
Lifespan:	35,000 hours



Optional: Finish Color, 2W, 3.2W

#10705
White PIR

#10706
Black PIR


#10707
Silver PIR

SES-SWL-6.8W-B



Solar Flood Light, SWL - 6.8W

Watts:	6.8W
Lumens:	800lm
CCT:	6000K, (3000K Back)
Working Modes:	3
Battery:	2x2,000mAh Li-ion
IP Rating:	IP65
Materials:	ABS, PC
Finish:	White, Clear
Lifespan:	35,000 hours



Optional: Finish Color, 2W, 3.2W


#10704
White PIR

SES-SWL2WC-3000-2



Solar Accent Light, SWL2WC - 2W

Watts:	2W
Lumens:	200lm
CCT:	3000K
Working Modes:	3
Battery:	1,200mAh Li-ion
IP Rating:	IP65
Materials:	ABS, PC
Finish:	Silver, Frosted
Lifespan:	35,000 hours



#10708
3000K PIR

LED CANOPY & GAS SIGNS

SARIN's LED Canopy Lights are specifically designed to illuminate from even the tallest canopy. They are crafted from durable materials that can withstand extreme outdoor environments. Gas Price Signs can easily be programmed and are excellent at drawing attention.

Applications:

- Hotels
- Restaurants
- Gas Stations
- Parking Garages

[▲ Return to Table of Contents](#)




SES-CP5-5700-95



Canopy Light, CP5 - 95W

Watts:	95W
Lumens:	13,110lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours




#10353
5700K

SES-CP4-5700-130



Canopy Light, CP4 - 130W

Watts:	130W
Lumens:	15,500lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours




#10341
5700K

SES-CP5-5700-150



Canopy Light, CP5 - 150W

Watts:	150W
Lumens:	19,050lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours




#10947
5700K

SES-PG02-5700-75



Canopy Light, PG02 - 75W

Watts:	75W
Lumens:	10,000lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours



#10948
5700K


Optional: 35W, 55W, 100W

SES-CPH-5700-180



Canopy Light, CPH - 180W

Watts:	180W
Lumens:	24,500lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours



#10344
5700K


Optional: 150W

SES-CP02B-240-5700



Canopy Light, CP02B - 240W

Watts:	240W
Lumens:	34,080lm
CCT:	5700K
Voltage:	AC120 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10946
5700K


Optional: 150W, 180W

SES-PG-55W-CCT-abc



CCT Canopy Light, PG - 55W

Watts:	55W
Lumens:	7,700lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Bronze
Lifespan:	50,000 hours



#10346
White

#10347
Bronze


Optional: Finish Color

SES-PG-75W-CCT-abc



CCT Canopy Light, PG - 75W

Watts:	75W
Lumens:	10,875lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	1 - 10V
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White
Lifespan:	50,000 hours



#10348
White


Optional: Finish Color

SES-LCP-5700-180



Canopy Light, LCP - 180W

Watts:	180W
Lumens:	23,360lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours



#10345
5700K


Optional: 150W, 240W

SES-GAS12-X-D



Gas Price Sign, 12 in - 64.4W

Watts:	64.4W
Controller:	RF Remote & App
CCT:	Red / Green / White
Voltage:	AC110V
Dimmable:	Light Sensor
IP Rating:	IP53
Materials:	Iron
Finish:	Black
Lifespan:	100,000 hours

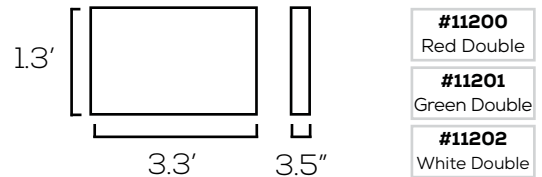


SES-GAS24-X-D



Gas Price Sign, 24 in - 242W

Watts:	242W
Controller:	RF Remote & App
CCT:	Red / Green / White
Voltage:	AC110V
Dimmable:	Light Sensor
IP Rating:	IP53
Materials:	Iron
Finish:	Black
Lifespan:	100,000 hours

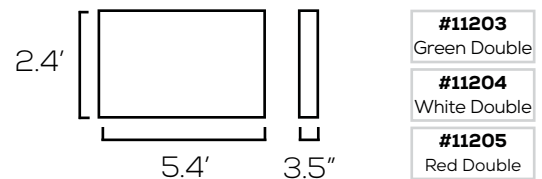


SES-CACR18-X-X



Gas Price Sign, 18 in - 90W

Watts:	90W
Controller:	RF Remote
CCT:	Red / White
Voltage:	AC110V
Dimmable:	Light Sensor
IP Rating:	IP65
Materials:	Iron, Acrylic
Finish:	Black
Lifespan:	>100,000 hours

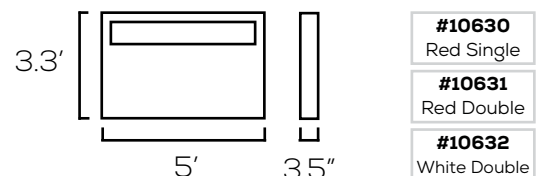


SES-GAS36-X-D



Gas Price Sign, 36 in - 415W

Watts:	415W
Controller:	RF Remote & App
CCT:	Red / Green / White
Voltage:	AC110V
Dimmable:	Light Sensor
IP Rating:	IP53
Materials:	Iron
Finish:	Black
Lifespan:	100,000 hours

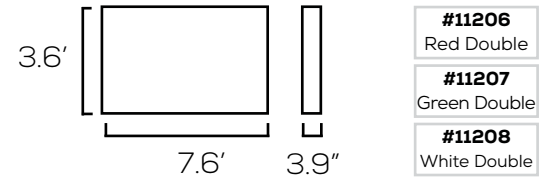


SES-GAS48-X-D



Gas Price Sign, 48 in - 557.6W

Watts:	557.6W
Controller:	RF Remote & App
CCT:	Red / Green
Voltage:	AC110V
Dimmable:	Light Sensor
IP Rating:	IP53
Materials:	Iron
Finish:	Black
Lifespan:	100,000 hours

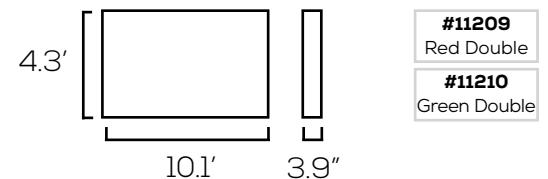


SES-CACR24-X-X



Gas Price Sign, 24 in - 150W

Watts:	150W
Controller:	RF Remote
CCT:	Red / Green
Voltage:	AC110V
Dimmable:	Light Sensor
IP Rating:	IP65
Materials:	Iron, Acrylic
Finish:	Black
Lifespan:	>100,000 hours

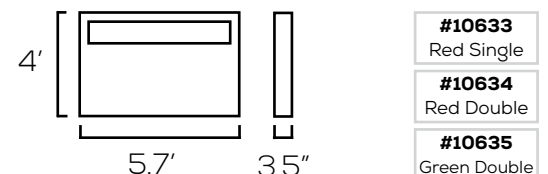

LED HIGH POWER LAMPS

SARIN's High Power Lamps will brighten up any outdoor area. LED Corn Lamps are most commonly used to replace HID lamps and metal halide bulbs. These lamps are an economical and easy way to replace high wattage lamps without having to change existing fixtures.

Applications:

- Offices
- Shopping Centers
- Hospitals
- Gas Stations

▲ [Return to Table of Contents](#)




SES-CL1-6500-40-E39




Corn Bulb, CL1 - 40W

Watts:	40W
Lumens:	4,000lm
CCT:	6500K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP64
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours




#10079
E39 Base

SES-CB-6500-80



Corn Bulb, CB - 80W

Watts:	80W
Lumens:	8,000lm
CCT:	6500K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP44
Materials:	Aluminum, PC
Finish:	White
Lifespan:	50,000 hours

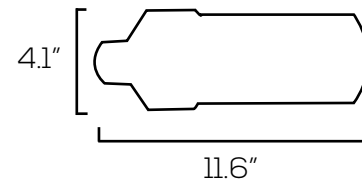


#10077
E39 Base

SES-CL1-6500-100-E39



Corn Bulb, CL1 - 100W

Watts:	100W
Lumens:	10,000lm
CCT:	5700K / 6500K
Voltage:	AC85 - 300V
Dimmable:	No
IP Rating:	IP64
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours

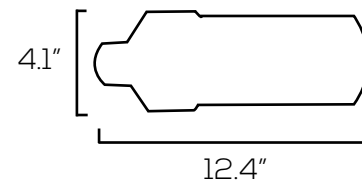

#10078
6500K E39


#10080
5700K E39

SES-CL1B1-5700-120-E39



Corn Bulb, CL1B1 - 120W

Watts:	120W
Lumens:	13,670lm
CCT:	5700K
Voltage:	AC85 - 300V
Dimmable:	No
IP Rating:	IP64
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours

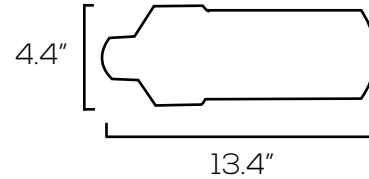


#10081
E39 Base

SES-CL1B1-5700-150-E39



Corn Bulb, CL1B1 - 150W

Watts:	150W
Lumens:	17,940lm
CCT:	5700K
Voltage:	AC85 - 300V
Dimmable:	No
IP Rating:	IP64
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours

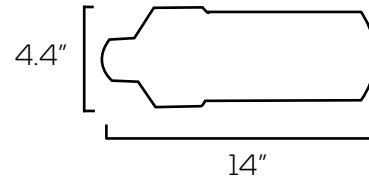


#10082
E39 Base

SES-CLW07E-XXXX-18Y



Corn Bulb, CLW07E - 18W

Watts:	18W
Lumens:	2,610lm
CCT:	3000K / 5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours



#10044
3000K E26


#10045
5700K E26

SES-CLH-5700-75



Retrofit Corn Bulb, CLH - 75W

Watts:	75W
Lumens:	9,750lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours

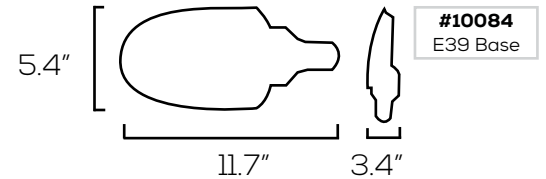


SES-CLH-5700-115



Retrofit Corn Bulb, CLH - 115W

Watts:	115W
Lumens:	14,950lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	50,000 hours

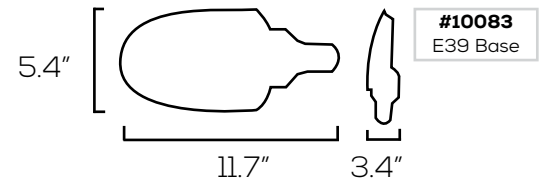


SES-CLW07E-5700-54Y



Corn Bulb, CLW07E - 54W

Watts:	54W
Lumens:	8,100lm
CCT:	5700K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	White, Clear
Lifespan:	50,000 hours

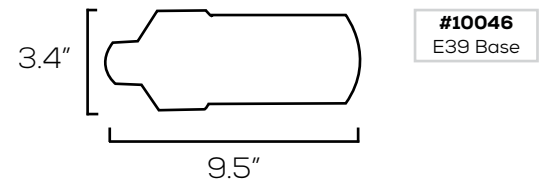



LED LANDSCAPE LIGHTS

Be the envy of your neighbors with SARIN's Outdoor Landscaping Lights! Light up your walkways or show off your garden at any time of night with this waterproof light series.

Applications:

- Hotels
- Parks
- Gardens
- Sidewalks

Bulbs are sold separately for fixtures that require them.

[▲ Return to Table of Contents](#)




SES-BLS-CCT-20



CCT Post Top Bollard Light – 20W

Watts:	20W
Lumens:	2,000lm
CCT Switch:	3000K, 4500K, 6000K
Voltage:	AC100-277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	30,000 hours



#10627
CCT


Optional: Finish Color

SES-BLL-CCT-10



CCT Post Top Bollard Light – 10W

Watts:	10W
Lumens:	1,000lm
CCT Switch:	3000K, 4500K, 6000K
Voltage:	AC96-264V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Clear
Lifespan:	30,000 hours



#10626
CCT


Optional: Finish Color

SES-PT01-E26



Post Top Bollard Light, PT01 - E26

Watts:	Bulb Dependent
Bulb:	A19 Type
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, Frosted
Bulb Lifespan:	25,000 hours



#10940
E26


Optional: Finish Color

SES-BLW20-CCT-20



CCT Bollard Light, BLW20 - 20W

Watts:	20W
Lumens:	1,800lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10289-A
CCT

#10289-C
36 in Base


Optional: Finish Color, Height

SES-BLW20-CCT-20



CCT Bollard Light, BLW20 - 20W

Watts:	20W
Lumens:	1,800lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 277V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	50,000 hours



#10289-A
CCT

#10289-B
42 in Base

Optional: Finish Color, Height

SES-BL-13408-3000




Kilburn
Series



Flared Top Bollard Light - 9W

Watts:	9W
Lumens:	720lm
CCT:	3000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Silver, Frosted
Lifespan:	30,000 hours



#10287
3000K

Optional: Finish Color, Height

SES-BL2003F-CCT-20




Kilburn
Series



CCT Flat Top Bollard Light - 20W

Watts:	20W
Lumens:	1,600lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	40,000 hours

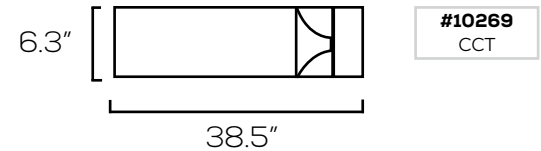

Optional: Finish Color, Height

SES-BL2003R-CCT-20




Kilburn
Series



CCT Round Top Bollard Light - 20W

Watts:	20W
Lumens:	1,600lm
CCT Switch:	3000K, 4000K, 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Clear
Lifespan:	40,000 hours

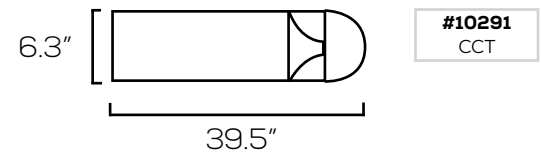

Optional: Finish Color, Height

SES-BL-13408-XXXX




Kilburn
Series



Flared Top Bollard Light - 9W

Watts:	9W
Lumens:	720lm
CCT:	3000K / 5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Bronze, Frosted
Lifespan:	30,000 hours

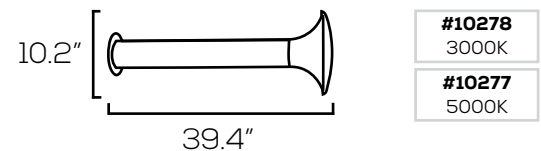


Optional: Finish Color, Height

SES-LSGL-3000-7



Lawn Spotlight, LSGL - 7W

Watts:	7W
Lumens:	560lm
CCT:	3000K
Voltage:	DC12V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Black, Clear
Lifespan:	30,000 hours

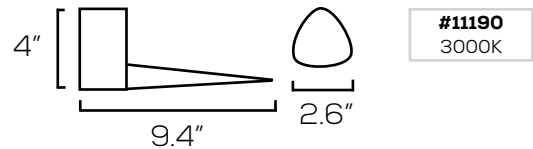


Optional: Mount

SES-LSGL-3000-10



Lawn Spotlight, LSGL - 10W

Watts:	10W
Lumens:	800lm
CCT:	3000K
Voltage:	DC12V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Black, Clear
Lifespan:	30,000 hours

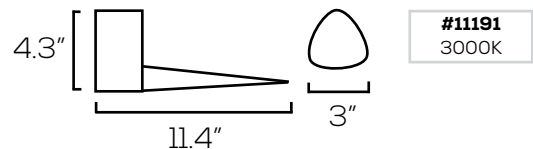


Optional: Mount

SES-GARD-RGBW-KIT



RGBW Lawn Lights, 10 Lamps - 30W

Watts:	3W / Lamp
Lumens:	600lm / Lamp
CCT:	RGBW
Voltage:	AC110V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, PC
Finish:	Black, White
Lifespan:	30,000 hours

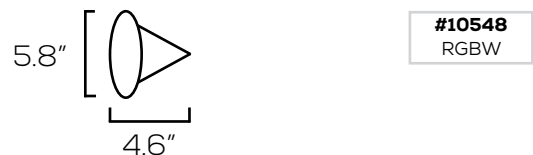

Optional: Remote



SES-LSGL-3000-20



Lawn Spotlight, LSGL - 20W

Watts:	20W
Lumens:	1,700lm
CCT:	3000K
Voltage:	DC12V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Black, Clear
Lifespan:	30,000 hours



Optional: Mount

SES-LSGL-3000-40



Lawn Spotlight, LSGL - 40W

Watts:	40W
Lumens:	3,400lm
CCT:	3000K
Voltage:	DC12V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Black, Clear
Lifespan:	30,000 hours



Optional: Mount

SES-FL-XXXX-5000-7.5




Archway Series



Standing Lawn Light - 7.5W

Watts:	7.5W
Lumens:	240lm
CCT:	5000K
Voltage:	AC100 - 240V
Dimmable:	No
IP Rating:	IP54
Materials:	Aluminum, PC
Finish:	Dark Gray, Frosted
Lifespan:	30,000 hours

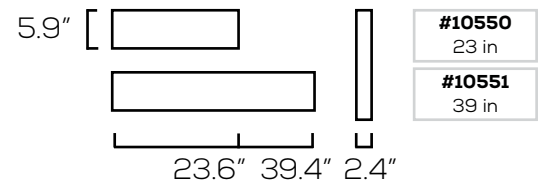

SES-LNDX-108-3W




Ladbroke Series



Mushrooms Lawn Light - 3W

Watts:	3W
Lumens:	150lm
CCT:	3000K
Voltage:	AC12V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum
Finish:	Brown, Frosted
Lifespan:	50,000 hours



#10282
3000K

Optional: Finish Color, Driver, Quick Connector

SES-LNDX-911-5W




Ladbroke Series



Lawn Spotlight, LNDX - 5W

Watts:	5W
Lumens:	280lm
CCT:	3000K
Voltage:	AC12V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum
Finish:	Brown, Clear
Lifespan:	50,000 hours



#10283
3000K

Optional: Finish Color, Driver, Quick Connector

SES-LNDX-987-3W



Ladbroke Series



Torch Lawn Light - 3W

Watts:	3W
Lumens:	150lm
CCT:	3000K
Voltage:	AC12V
Dimmable:	No
IP Rating:	IP65
Materials:	Aluminum, Glass
Finish:	Brown, Frosted
Lifespan:	50,000 hours



#10284
3000K


Optional: Finish Color, Driver, Quick Connector

SES-SPB06-MR16




Brass Spotlight, SPB06 - MR16

Watts:	Bulb Dependent
Bulb:	MR16
Base:	GU5.3 Bi-Pin
Voltage:	AC12V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Materials:	Brass, Glass
Finish:	Brass, Clear
Bulb Lifespan:	25,000 hours

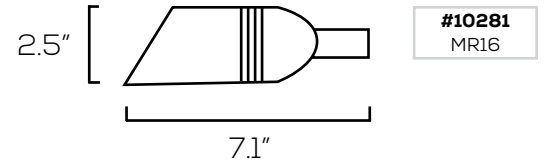


SES-SPB01-MR16



Brass Spotlight, SPB01 - MR16

Watts:	Bulb Dependent
Bulb:	MR16
Base:	GU5.3 Bi-Pin
Voltage:	AC12V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Materials:	Brass, Glass
Finish:	Brass, Clear
Bulb Lifespan:	25,000 hours

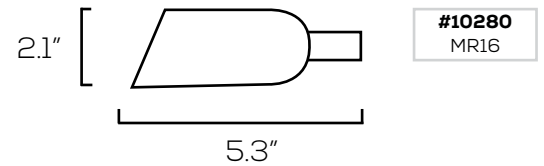



Authorized Distributor

☎ 702 384-6407

🏢 702 384-6346

✉ CLS@lightingspecialtieslv.com

🌐 www.lightingspecialtieslv.com

