



INTEGRATED



12V INTEGRATED LED LANDSCAPE UPLIGHTS

:: Catalog No.	LFLV-7W-30K LFLV-7W-50K	LFLV-12W-30K LFLV-12W-50K
:: Wattage	7W	12W
:: Lumens	500 (30K), 550 (50K)	800 (30K), 900 (50K)
:: Voltage	12V AC/DC (Tolerance: 8-1	4V AC/DC 7W, 11-14V AC/DC 12W)
:: Color Temp	3000K Warm White (30K), 5000K Cool White (50K)
:: Beam Angle	40°	60°
:: Light Source	Nichia 757 UL-Recognized LED Con	troller and SMD LED Array (Non-Dimmable)
:: Housing / Finish	ADC 12 Cast Aluminum	with Powder Coat (Bronze Finish)
:: Lens	Optical Polycarbonate Lens	Prismatic Reflector + Optic LED Lens and Glass Front Lens
:: Dimensions	4.30" 2.36"	3.94"

:: Accessories included



Silicon-filled Wire Nuts



8-1/2" Non-metallic Spike



SPT-2 18AWG Lead Wire



Integrated SMD board and Optical Lens






















12V INTEGRATED LED LANDSCAPE FLOOD LIGHTS

Philips Lumileds (Non-dimmable)

ADC 12 Cast Aluminum with Powder Coat (Bronze Finish)

Optical Polycarbonate Lens

:: Catalog No.	FLV12-6W-30K FLV12-6W-50K	FLV12-12W-30K FLV12-12W-50K	FLV12-24W-30K FLV12-24W-50K	FLV12-32W-30K FLV12-32W-50K	
:: Wattage	6W	12W	24W	32W	
:: Lumens	600LM	1200LM	2400LM	3200LM	
:: Voltage	12V AC/DC (Tolerance: 12-18V AC, 10-26V DC)				
:: Color Temp	3000K Warm White (30K), 5000K Cool White (50K)				
:: Beam Angle	60°				

:: Light Source

:: Housing / Finish

:: Lens
















:: Accessories included



Silicon-filled Wire Nuts



Non-metallic Spike

3ft. SPT-2 18AWG Lead Wire (6W 22AWG)


















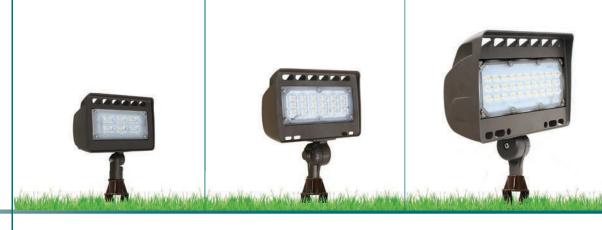

12V INTEGRATED LED WALL WASH LIGHTS

:: Catalog No.	LF4-12V-6W-30K LF4-12V-6W-50K	LF4-12V-12W-30K LF4-12V-12W-50K	LF4-12V-24W-30K LF4-12V-24W-50K	LF4-12V-30W-30K LF4-12V-30W-50K	LF4-12V-50W-30K LF4-12V-50W-50K
:: Wattage	6W	12W	24W	30W	50W
:: Lumens	440 (30K), 500 (50K)	1080 (30K), 1260 (50K)	2155 (30K), 2500 (50K)	2700 (30K), 3150 (50K)	4500 (30K), 5250 (50K)
:: Voltage		1	2V AC/DC (Tolerance	: 12-18V AC, 10-26V	DC)
:: Color Temp		300	OK Warm White (30k	(), 5000K Cool White	(50K)
:: Beam Angle			120°	X 90°	
:: Light Source			Philips Lumileds	s (Non-dimmable)	
:: Housing / Finish		ADC 12	2 Cast Aluminum with	n Powder Coat (Bronz	ze Finish)
:: Lens			Optical Poly	carbonate Lens	
:: Dimensions	4.7		6.6"		8.6"

:: Accessories included



Silicon-filled Wire Nuts



3ft. SPT-2 18AWG Lead Wire (6W 22AWG)

For surface mounting use A-41-BR base see accessories page C35

















12V LED GARDEN LIGHTS

	LF12-6WW			
:: Catalog No.	LF12-6NW			
	LF12-6CW			
:: Wattage	5W (New Higher Efficiency, Same Lumens as Previous 6W)			
:: Lumens	400LM (3200K) / 450LM (4000K) / 450LM (5000K)			
:: Voltage	12V AC/DC (Tolerance: ±3V AC/DC)			
:: Color Temp	3200K Warm White (WW), 4000K Natural White (NW), 5000K Cool White (CW)			
:: Beam Angle	45°			
:: Light Source	COB Technology with Smooth Aluminum Reflector (Non-dimmable)			
:: Housing / Finish	ADC 12 Cast Aluminum with Powder Coat (Bronze Finish)			
:: Lens	Glass Lens			
:: Dimensions	4"			

























12V LED DIRECTIONAL LIGHT - SOLID BRASS

:: Catalog No.	LFLD-5W-30K-BZ	LD-180-BZ	
:: Housing / Finish	Solid Brass Antiq	ue Bronze Finish	
:: Wattage	5W	3W	
:: Lumens	400LM	300LM	
:: Voltage	12V AC/DC	12V AC/DC	
:: Color Temp	3000K Warm White	3000K Warm White	
:: Beam Angle	90° to 10° Adjustable with Telescopic Hood	80°	
:: Light Source	CREE COB Technology (Non-Dimmable)	LED JC G4 Corn Lamp Bi-pin	
:: Lens	Magnifying Glass Lens Adjusts Beam Angle from 90° to 10°	3 Different Lenses included: Clear, Frosted & Line Diffuser	
:: Dimensions	4.5 to 6 "Adjustable for Beam Angle		





Silicon-filled Wire Nuts



8-1/2" Non-metallic Spike



Lead Wire



CREE COB Tech. (LFLD-5W-30K-BZ)



LED JC G4 Corn Lamp Bi-pin (LD-180-BZ)

















12VLED DIRECTIONAL LIGHTS - SOLID COPPER & SOLID BRASS

:: Catalog No.	LD-098-CR	LD-176-CR	LD-176-BZ	LD-009-BZ	
:: Housing / Finish	Cast Solid Cop	per, Natural Finish	Cast Solid Brass, Antique Bronze Finish		
:: Wattage		5W (Included)), 7W LED Max.		
:: Lumens		400	DLM		
:: Voltage		12V /	AC/DC		
:: Color Temp		3000K W	arm White		
:: Beam Angle		3	6°		
:: Light Source	5W LED	Glass MR16 Lamp Included (WE	STGATE Part Number: MR16-400	DL-30K-D)	
:: Lens		Convex (Glass Lens		
:: Dimensions	enk is	2-5/8" 2-5/8"	2-3/8" 2-5/8"	2.00 S. 10 S	
:: Accessories included	Silicon-filled	8-1/2" 3ft. SPT-2 18A	- 18 WG		



Wire Nuts



Non-metallic Spike

Lead Wire

LED MR16 Lamp



LED



12VLED DIRECTIONAL LIGHTS - SOLID BRASS

:: Catalog No.	LD-006-BZ	LD-103-BZ	LD-099-BZ	LD-174-BZ
:: Housing / Finish	(Cast Solid Brass, Antique Bronze F	inish	Spun Solid Brass
:: Wattage		5W (Included), 7W LED Max.	
:: Lumens		40	OLM	
:: Voltage		12V	AC/DC	
:: Color Temp		3000K W	arm White	
:: Beam Angle		3	36°	
:: Light Source	5W LEI	D Glass MR16 Lamp Included (WE	STGATE Part Number: MR16-400	DL-30K-D)
:: Lens		Convex	Glass Lens	
:: Dimensions	Talk?	2-1/4"	2-1/2"	6-5/8" 2-3/4

:: Accessories included



Silicon-filled Wire Nuts



8-1/2" Non-metallic Spike



3ft. SPT-2 18AWG Lead Wire



LED MR16 Lamp



















12V LED DIRECTIONAL LIGHTS-SOLIDBRASS, CAST ALUMINUM, FIBER GLASS

		,			
:: Catalog No.	LD-192-BZ	AD-192-BK AD-192-BR	AD-192-FBK		
:: Housing / Finish	Cast Brass Antique Bronze (BZ)	Die-cast Aluminum Black (BK), Bronze (BR)	Fiberglass (Black)		
:: Wattage		5W (Inluded), 7W LED Max			
:: Lumens		400LM			
:: Voltage		12V AC/DC			
:: Color Temp		3000K Warm White			
:: Beam Angle	36°				
:: Light Source	5W LED glass MR	.16 Lamp Included (WESTGATE Part N	lumber: MR16-400L-30K-D)		
:: Lens		Convex Glass Lens			
:: Dimensions	4-1/2"	4-1/2"	4-1/2"		
:: Accessories included	Silicon-filled 8-1/ Wire Nuts Non-meta	CDT.2.19AW//-	LED MR16 Lamp		





Alum. & FG.





12V I FD DIRECTIONAL LIGHTS - ALLIMINIM

	IZV LED DIKEGTIONAL LIGHT 3 - ALUMINUM					
:: Catalog No.	AD-102-BK AD-102-BR	AD-003-BK AD-003-BR	AD-130-BK AD-130-BR	AD-131-BK AD-131-BR		
:: Housing / Finish			uminum (), Bronze (BR)			
:: Wattage		5W (Include	ed), 7W LED Max.			
:: Lumens		4	100LM			
:: Voltage		12'	V AC/DC			
:: Color Temp		3000K Warm White				
:: Beam Angle			36°			
:: Light Source	5W LEC	O Glass MR16 Lamp Included (W	/ESTGATE Part Number: MR16-40	0L-30K-D)		
:: Lens		Flat Glass Lens (E	xcept AD-102 Convex)			
:: Dimensions	4314	2-1/4"	5.516	5586		
:: Accessories	_	400				



Silicon-filled Wire Nuts



8-1/2" Non-metallic Spike





LED MR16 Lamp












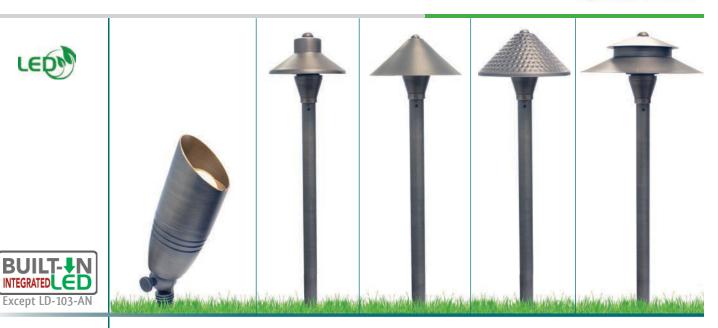

AGED NICKEL COLLECTION

:: Catalog No.	LD-103-AN	LA-112-AN	LA-117-AN	LA-116-AN	LA-111-AN	
:: Housing / Finish	Cast I	Brass, Aged Nickel Fin	ish (Long-lasting Altern	ative to Stainless Stee	el)	
:: Wattage	5W (Included), 7W LED Max.	3W				
:: Lumens	400LM		2	00LM		
:: Voltage	12V AC/DC	12V AC/DC				
:: Color Temp	3000K Warm White	3000K Warm White				
:: Beam Angle	36°			360°		
:: Light Source	5W LED Glass MR16 Lamp Included		Integrated SM	D LED TowerHeavy		
:: Lens	Flat Glass Lens	Duty Clear Glass Lens				
:: Diameter of Shade	For dimensional drawing	5-1/2"	7-7/8"	6-3/4"	8"	
:: Total Height	see page C7	23"	23"	23"	23"	
:: Accessories						



Silicon-filled Wire Nuts



Non-metallic Spike

3ft. SPT-2 18AWG Lead Wire



LED MR16 Lamp (LD-103-AN)



LED Tower (Path lights)












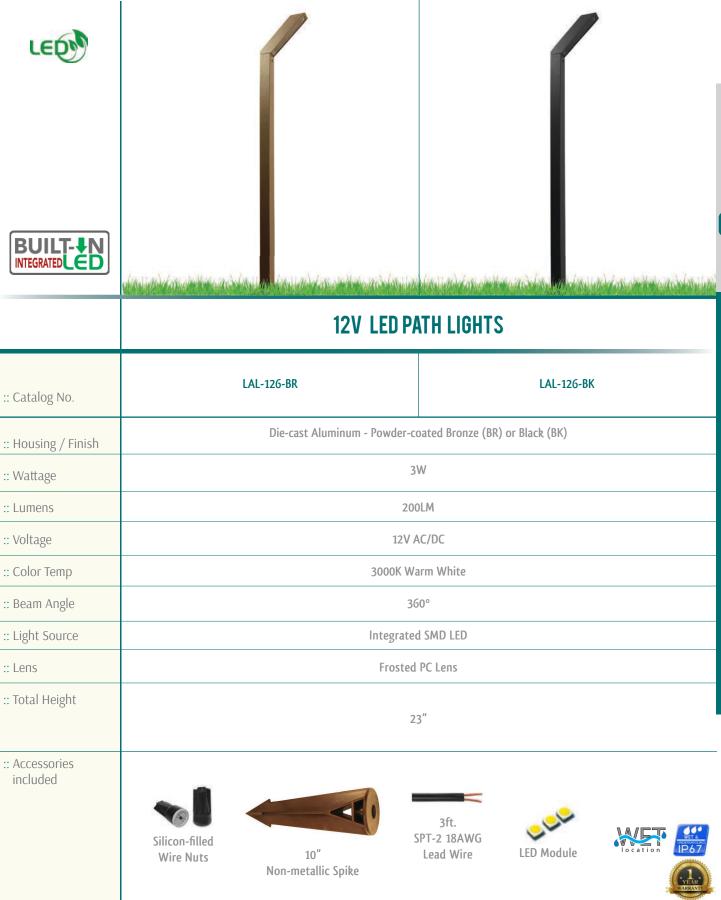













BUILT-IN INTEGRATED ED

12V LED AREA LIGHTS-SOLID BRASS

:: Catalog No.	LA-STEM-BZ	LA-112-BZ	LA-115-BZ	LA-117-BZ			
:: Housing / Finish	Solid Brass - Antique Bronze Finish						
:: Wattage		3W					
:: Lumens		200	DLM				
:: Voltage		12V AC/DC					
:: Color Temp		3000K Wa	arm White				
:: Beam Angle	360°						
:: Light Source		Integrated SMD LED Tower Heavy					
:: Lens	Duty Clear Glass Lens						
:: Diameter of Shade	_	5-1/2"	5-3/8"	7-7/8"			
:: Total Height	23"	23"	23"	23"			
:: Accessories	If ordering stem and shade separately, add "-C" to fixture model for shade						



Silicon-filled Wire Nuts



8-1/2" Non-metallic Spike



Example: LA-112-BZ-C (Shade only) + LA-STEM-BZ



LED Tower









:: Catalog No.	LA-116-BZ	LA-118-BZ	LA-111-BZ			
:: Housing / Finish		Solid Brass - Antique Bronze Finish				
:: Wattage		3W				
:: Lumens		200LM				
:: Voltage		12V AC/DC				
:: Color Temp	3000K Warm White					
:: Beam Angle	360°					
:: Light Source		Integrated SMD LED Tower Heavy				
:: Lens		Duty Clear Glass Lens				
:: Diameter of Shade	6-3/4" 6-7/8" 8"					
:: Total Height	23"	23"	23"			
:: Accessories	If ordering stem and shade separately, add "-C" to fixture model for shade					

If ordering stem and shade separately, add "-C" to fixture model for shade Example: LA-112-BZ-C (Shade only) + LA-STEM-BZ

















SPT-2 18 AWG Lead Wire









12V LED AREA LIGHTS SOLID BRASS

:: Catalog No.	LA-008-BZ	LA-010-BZ	LA-002-BZ
:: Housing / Finish		Solid Brass - Antique Bronze Finish	
:: Wattage		3W	
:: Lumens		200LM	
:: Voltage	12V AC/DC		
:: Color Temp	3000K Warm White		
:: Beam Angle	360°		
:: Light Source	Integrated SMD LED Tower		
:: Lens	Heavy-Duty Clear Glass Lens		
:: Diameter of Shade	5-1/2"	8-1/2"	5-1/2"
:: Total Height	20"	23"	23-1/2"
:: Accessories included	Stems and shades of the item	s on this page are not interchangeable w	th each other or other models



Silicon-filled

Wire Nuts





8-1/2"

Non-metallic Spike

3ft.

SPT-2 18AWG

Lead Wire

LED Tower



:: Catalog No.	AA-145-BK	AA-146-BK		
:: Housing / Finish	Die-cast Aluminum - Powder-Coated Bronze Finish (BR), Black (BK)			
:: Wattage	3W			
:: Lumens		200LM		
:: Voltage	12V AC/DC			
:: Color Temp	3000K Warm White			
:: Beam Angle	360°			
:: Light Source	Integrated SMD LED Tower			
:: Lens		Heavy-Duty Clear Glass Lens		
:: Diameter of Shade	6"	6"	8-3/4"	
:: Height of Stem	4"	13"	11"	
:: Total Height	9-1/2"	13"	14-3/4"	
:: Accessories				















INTEGRATED



12V LED AREA LIGHTS-SOLID COPPER

:: Catalog No.	LA-STEM-CR	LA-111-CR	LA-117-CR	LA-116-CR
:: Housing / Finish	Solid Copper, Natural Finish			
:: Wattage		3W		
:: Lumens		200LM		
:: Voltage	12V AC/DC			
:: Color Temp	3000K Warm White			
:: Beam Angle	360°			
:: Light Source	Integrated SMD LED Tower			
:: Lens	Heavy-Duty Clear Glass Lens			
:: Diameter of Shade	_	8"	7-3/4"	6-3/4"
:: Total Height	23"	23"	23"	23"
:: Accessories	If ordering stem and shade separately, add "-C" to fixture model for shade			

Example: LA-111-CR-C (Shade only) + LA-STEM-CR



Silicon-filled Wire Nuts



8-1/2" Non-metallic Spike





LED Tower









12V LED AREA LIGHTS-SOLID COPPER

:: Catalog No.	LA-010-CR	LA-118-CR	LA-112-CR	
:: Housing / Finish	Solid Copper, Natural Finish			
:: Wattage		3W		
:: Lumens		200LM		
:: Voltage	12V AC/DC			
:: Color Temp	3000K Warm White			
:: Beam Angle	360°			
:: Light Source		Integrated SMD LED Tower		
:: Lens	Heavy-Duty Clear PC Lens			
:: Diameter of Shade	5-3/4"	6-1/4"	6-1/4"	
:: Total Height	20"	18"	12"	
:: Accessories	Stems and shades of the items on this page are not interchangeable with each other or other models			



Silicon-filled Wire Nuts



Non-metallic Spike



SPT-2 18AWG Lead Wire



LED Tower















CTED LIGHTS WITH LED LAMPS

	STEP LIGHTS WITH LED LAMPS		
:: Catalog No.	AS-158-BR AS-158-BK	AS-159-BR AS-159-BK	
:: Housing / Finish		uminum, Black Finish	
:: Wattage	3	W	
:: Lumens	30	0LM	
:: Voltage	12V /	AC/DC	
:: Color Temp	3000K Warm White		
:: Beam Angle	80°		
:: Light Source	LED JC G4 Corn Lamp Bi-pin		
:: Lens	Glas	s Lens	
:: Dimensions	2" 4"	2"	
:: Accessories included	Silicon-filled SPT-2 18AWG	location P67	





Lead Wire

LED JC G4

Corn Lamp Bi-pin

Wire Nuts













STEP LIGHTS WITH LED LAMPS

:: Catalog No.	LS-180-BZ 3" ARCHITECTURAL	LS-158-BZ	LS-158-SS	LS-159-BZ
:: Housing / Finish	Solid Brass, Antique Bronze Finish	Solid Brass, Antique Bronze Finish	Cast Solid Brass, Stainless Steel Finish	Solid Brass, Black Finish
:: Wattage		3	W	
:: Lumens		300	OLM	
:: Voltage		12V /	AC/DC	
:: Color Temp		3000K Wa	arm White	
:: Beam Angle		8	0°	
:: Light Source		LED JC G4 Corn Lamp Bi-pin		
:: Lens		Glass	s Lens	
:: Dimensions	3.125		2"	
	6300			

:: Accessories included



Silicon-filled Wire Nuts



Lead Wire























LED STEP LIGHTS

LS-124-BZ LS-160-BZ LS-155-BZ LS-161-BZ :: Catalog No. LS-124-AN LS-160-AN :: Material / Finish Solid Brass Faceplate, Antique Bronze Finish (BZ) Aged Nickel (AN), Powder Coated Galvanized Steel Housing :: Wattage :: Lumens 200LM :: Voltage 12V AC/DC :: Color Temp 3000K Warm White :: Beam Angle 90° :: Light Source Integrated SMD LED Module Glass, Inside Frost with Foam Gasket :: Lens :: Dimensions

:: Accessories included



Housing Depth: 3 1/2"

Silicon-filled Wire Nuts



Housing Depth: 2 1/4"

3ft. SPT-2 18AWG Lead Wire



Housing Depth: 3 1/2"

Integrated SMD LED Module



Housing Depth: 2 1/4"



















LED HARDSCAPE LIGHTS

	·		
:: Catalog No.	HSL-3-30K	HSL-7-30K	HSL-13-30K
:: Housing / Finish	Cast Aluminum Fixture, Stainless	s Steel Bracket, Aluminum Front Trim wit	h Dark Gray Finish (Paintable)
:: Wattage	1W	2W	3W
:: Lumens	30LM	100LM	160LM
:: Voltage	12V AC		
:: Color Temp	3000K Warm White		
:: Beam Angle	36°		
:: Light Source	LED COB Technology		
:: Lens		Built-In Glass Magnifying Lens	
:: Dimensions	3.075*	7'	12 12 255°

:: Accessories included















BUILT-IN INTEGRATED LED

120V 8 120V



C22

SINGLE-GANG LED STEP LIGHT ENGINE FOR RECESSED TRIMS

	OMOLE ONNO LED OTEL LIGHT	ENGINE FOR REGEOOLD TRIMO		
:: Catalog No.	SLEA-12V-30K SLEA-12V-50K	SLEA-120V-30K SLEA-120V-50K		
:: Material / Finish	PVC Ho	ousing		
:: Wattage	2\	W		
:: Lumens	86LM	86LM		
:: Voltage	12V AC/DC	120V AC		
:: Color Temp	3000K Warm White	3000K Warm White, 5000K Cool White		
:: Beam Angle	-			
:: Light Source	Integrated COB LED Bar (Weatherproof) with built-in driver			
:: Lens	PC L	ens		
:: Dimensions	3.3"	Fits in Single Gang Switch Boxes (not included)		

:: Accessories included





PVC Gasket Set for J-box or weatherproof box mounting











LED STEP LIGHT RECESSED TRIMS

:: Catalog No. SLT-A-WH (WHITE FINISH) SLT-A-BZ (ANTIQUE BRONZE FINISH)





:: Catalog No.	SLT-A-BN (BRUSHED NICKEL FINISH)	SLT-A-ORB (OIL-RUBBED BRONZE FINISH)
:: Material	Precision-Cast Aluminum	
:: Dimensions	3.3"	1.11"

5.22"







BUILT-IN INTEGRATED LED





C24

SINGLE-GANG LED STEP LIGHT ENGINE

	SINGLE ONNO LED STEI LIGHT ENGINE		
:: Catalog No.	SLE-12V-30K SLE-12V-50K	SLE-120V-30K SLE-120V-50K	
:: Material / Finish	PVC Housing W/ ins	side frosted PC lens	
:: Wattage	3\	N	
:: Lumens	100LM (3000K) / 118LM (5000K)	90LM (3000K) / 104LM (5000K)	
:: Voltage	12V AC/DC	120V AC	
:: Color Temp	3000K Warm White	, 5000K Cool White	
:: Beam Angle	-	,	
:: Light Source	Integrated SMD LED Module (Weatherproof) with built-in driver		
:: Lens	Glass, Inside Frost	with Foam Gasket	
:: Dimensions	1.76"	Fits in Single Gang Switch Boxes (not included)	

:: Accessories included



2.85"




PVC Gasket Set for J-box or weatherproof box mounting









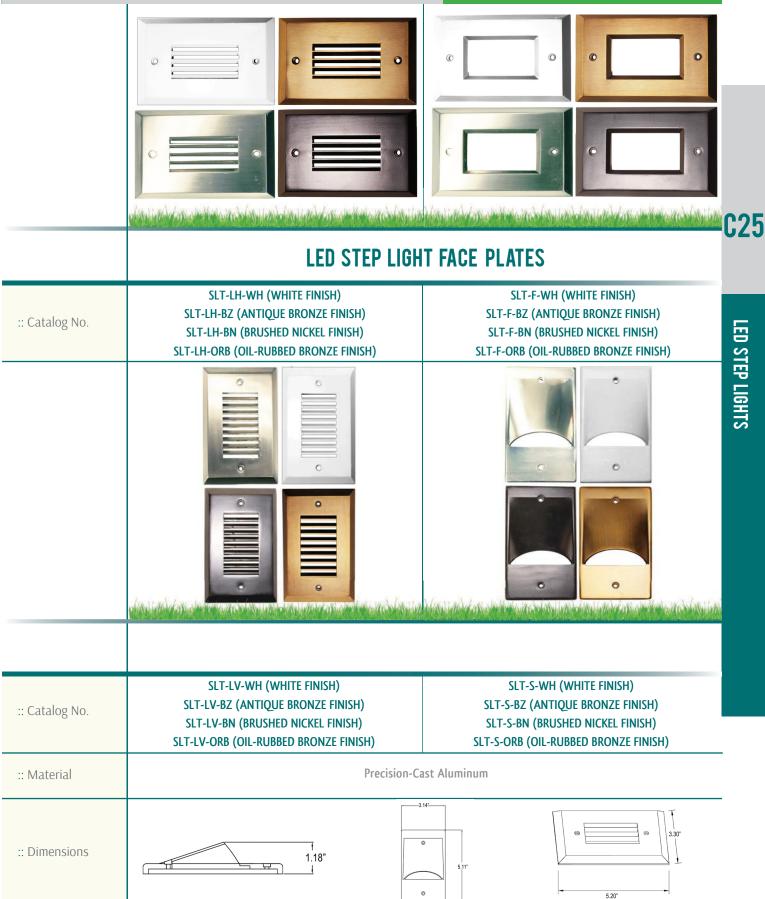









PAR36 FIXTURES

:: Catalog No.	WL-140-FBK	LD-001-BZ
:: Housing / Finish	Fiber Glass, Black	Die-cast Brass, Antique Bronze Finish
:: Wattage	-	-
:: Lumens	Depends on lamp	Depends on lamp
:: Voltage	12V	12V
:: Color Temp	-	-
:: Beam Angle	Depends on lamp	Depends on lamp
:: Light Source	PAR36 (not included)	Shown With Westgate PAR36 Lamp (not included)
:: Dimensions		3-1/7"





Silicon-filled Wire Nuts (Included)





SPT-2 18AWG Lead Wire with fork ends for LD-001-BZ (Included)



Westgate PAR36 Lamp (Not Included) See page C31



















12V INTEGRATED LED (IN GROUND) LIGHTS

:: Catalog No.	IGL-7W-30K	IGL-3W-30K	IGL-1W-30K
:: Housing / Finish	Stain	less Steel Cover, Aluminum Housing, PVC S	leeve
:: Wattage	7W	3W	1W
:: Lumens	620LM	290LM	100LM
:: Voltage		12V AC/DC	
:: Color Temp		3000K Warm White	
:: Beam Angle	90°	45	0
:: Light Source	COB Technology (Dimmable)		
:: Lens	Glass lens		
:: Dimensions	3.74"(95mm) 3.94"(100mm) 5.50" (140mm) 7WLED Light Engine Recessed Housing	3.54" (90mm) 3.39" (86mm) 3.39" (86mm) Recessed Housing	1.65°(42mm) 1.50°(38mm) 2.87" (73mm) 1W LED Light Engine Recessed Housing
:: Accessories included	~ 1		



Silicon-filled Wire Nuts



5" SJTW 20AWG Lead Wire



















WELL LIGHTS WITH SLEEVE & LED LAMPS

:: Catalog No.	WL-137-BK	WL-137-BZ	WL-138-BK	WL-138-BZ	WL-138-SS
:: Housing / Finish	Cast Aluminum (Black Finish with PVC Sleeve)	Cast Brass (Antique Bronze Finish with PVC Sleeve)	Cast Aluminum (Black Finish with PVC Sleeve)	Cast Brass (Antique Bronze Finish with PVC Sleeve)	Solid Stainless Steel with PVC Sleeve
:: Wattage			5W		
:: Lumens			400LM		
:: Voltage			12V AC/DC		
:: Color Temp			3000K Warm White		
:: Beam Angle			36°		
:: Light Source		MR16 Lamp Included	l (WESTGATE Part Numbe	er: MR16-400L-30K-D)	
:: Lens			Flat Temp. Glass		
:: Dimensions	3-7/8° 3-				
:: Accessories					



included



LED MR16 Lamp



3ft.

SPT-2 18AWG

Lead Wire

Silicon-filled

Wire Nuts











WELL LIGHTS WITH LED LAMPS

:: Catalog No.	WL-105-1-BK	WL-105-BK	WL-157-BK	WL-181-BK WL-181-BR	WL-181-BZ	
:: Housing / Finish	Cast Aluminum, Black Finish		Diecast Aluminum, Black Finish	Diecast Aluminum, Black (BK) & Bronze (BR) Finish	Solid Brass Antique Bronze (BZ) Finish	
:: Wattage			5W			
:: Lumens			400LM			
:: Voltage		12V AC/DC				
:: Color Temp	3000K Warm White					
:: Beam Angle	36° 60°		36°	36°		
:: Light Source	MR16 lamp included (WESTGATE Part Number: MR16-400L-30K-D)					
:: Lens		Glass lens				
:: Dimensions	3-7/8"	3-7/8"	3-7/8"	3-7/8"	3-7/8"	
:: Accessories included	Silicon-fille Wire Nuts	d SPT-2	ft. 18AWG Wire LED	MR16 Lamp	To cation IP67 NAMERATOR Brass Alum. & FG.	















SOLID BRASS WELL LIGHTS WITH DIRECTIONAL LAMP BRACKET

:: Catalog No.	WL-701-FGBZ	WL-705-FGBZ	WL-707-FGBZ	WL-708-FGBZ		
:: Housing / Finish	Solid Brass Covers & Fiber Glass Housing / Antique Bronze Finish					
:: Wattage		5V	N			
:: Lumens		400	LM			
:: Voltage		12V A	C/DC			
:: Color Temp		3000K Warm White				
:: Beam Angle		36°				
:: Light Source	MF	MR16 Lamp Included (WESTGATE Part Number: MR16-400L-30K-D)				
:: Lens		Flat Tem	p. Glass			
:: Dimensions	-4-7/8" 4-7/8					
:: Accessories						



included





3ft.

SPT-2 18AWG

Lead Wire

Silicon-filled

Wire Nuts







LED UNDERWATER LIGHTS

:: Catalog No.	UW-125-BS	UW-125-SS	
:: Housing / Finish	Brass	Stainless Steel	
:: Wattage	5	W	
:: Lumens	400	0LM	
:: Voltage	12V AC/DC		
:: Color Temp	3000K Warm White		
:: Beam Angle	36°		
:: Light Source	MR16 Lamp Included (WESTGATE Part Number: MR16-400L-30K-D)		
:: Lens	Glass Lens		
:: Dimensions			

:: Accessories included



Wire Nuts



30ft. SJO 18-2AWG Lead Wire



LED MR16 Lamp












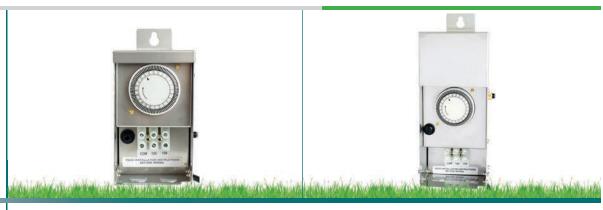

DUAL-TAP (12V/15V AC) LANDSCAPE TRANSFORMERS WITH TIMER & PHOTOCELL SLIDE DOOR

:: Catalog No.	TR-40W-DT-TPC-SS	TR-75W-DT-TPC-SS	TR-100W-DT-TPC-SS	TR-200W-DT-TPC-SS
:: Wattage	40W	75W	100W	200W
:: Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
:: Input Voltage	120V 60Hz	120V 60Hz	120V 60Hz	120V 60Hz
:: Terminal Blocks	2	2	2	2
:: Dimensions	L 8.2" - W 3.67" - H 4.2"		L 11.35" - W ²	4.05" - H 4.05"

:: Accessories included



Built-in timer Non-removable pins



Built-in Photocell Non-removable



6 Foot plug-in cord



Magnetic circuit breaker on secondary to protect lighting system















MULTI-TAP (12V/13V/14V/15V AC) LANDSCAPE TRANSFORMERS TIMER & PHOTOCELL READY NOT INCLUDED - HINGE DOOR

:: Catalog No.	TR-150W-MT-SS	TR-300W-MT-SS	TR-600W-MT-SS	TR-900W-MT-SS
:: Wattage	150W	300W	600W	900W
:: Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
:: Input Voltage	120V 60Hz	120V 60Hz	120V 60Hz	120V 60Hz
:: Terminal Blocks	2	2	2	2
:: Dimensions	L 11.4" - W 5.4" - H 5.3"	L 12.6" - W 5.9" - H 5.9"	L 18.1" - W 7.9" - H 7.9"	

:: Options







	PLUG-IN MECHANICAL TIMER	PLUG-IN DIGITAL TIMER	PLUG-IN PHOTOCELL
:: Catalog No.	TR-MTMR	TR-DTMR	TR-PC
:: Description	24-Hour 3-Prong Mechanical Plug-in Timer	7-Day 3-Prong Digital Plug-in Timer	Photocell with Plug-in Molex Connector

:: Accessories included



6 Foot plug-in cord included with Transformers





















C34.

12V REPLACEMENT LAMPS

	MR16-400L	MR16-500L	MR16-RGB	FOR ENCLOSED FIXTURES
:: Catalog No.	MR16-400L-27K-D MR16-400L-30K-D MR16-400L-41K-D MR16-400L-50K-D	MR16-500L-C90-30K-D MR16-500L-C90-50K-D	MR16-5W-RGB	PAR36-10W-30K PAR36-10W-40K PAR36-10W-50K
:: Wattage	5W	7W	5W	10W
:: Lumens	380LM, 380LM, 390LM, 400LM	500LM, 560LM	280LM	500LM, 800LM, 600LM
:: Voltage	12V AC/DC	12V AC/DC	12V AC/DC	12V AC/DC
:: Color Temp	2700K, 3000K, 4100K, 5000K	3000K, 5000K	RGB	3000K, 4000K, 5000K
:: Beam Angle	40°	40°	36°	50°














12V AC/DC REPLACEMENT LAMPS

:: Catalog No.	GZ-JC-39L-27K GZ-JC-39L-30K	GZ-JC-18L-27K GZ-JC-18L-30K	GZ-JC-WP-3W-32K	GZ-S8-32K
:: Wattage	3W	2W	3W	1.4W
:: Lumens	180LM	250LM	180LM	70LM
:: Voltage	12V AC/DC	12V AC/DC	12V AC/DC	12V AC/DC
:: Color Temp	2700K, 3000K	2700K, 3000K	3200K	3200K
:: Beam Angle	360°	360°	360°	360°







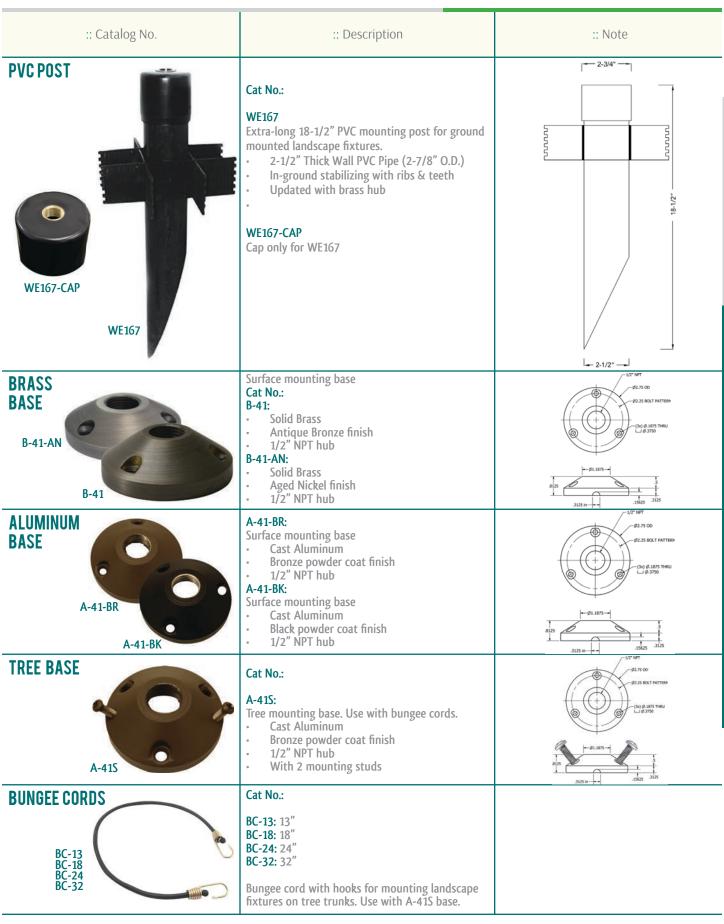



:: Catalog No. :: Description :: Note

SPIKES

SPIKE-BG

SPIKE-10

WL-SLEEVE

Cat No.:

SPIKE-BG:


8.5" PVC Spike

SPIKE-10:

10" PVC Spike

WL-SLEEVE:

PVC Sleeve Kit for 4" Well Lights.



SILICON-FILLED WIRE NUTS





LSWN2


Cat No.:


LSWN1:

Bag of 24 silicon-filled waterproof wire connectors, for up to two 14-2 + one 16-2 cables



Box of 24 silicon-filled waterproof wire connectors, for up to three 12-2 cables





LOW-VOLTAGE CABLE



Cat No.:

LOV-14: #14 AWG (41 Strands) LOV-12: #12 AWG (65 Strands) LOV-10: #10 AWG (104 Strands) LOV-8: #8 AWG (168 Strands)

500 Ft. Low-Voltage underground cable.

- Operating temp: -4°F to 140°F
- Suitable for outdoor lighting not exceeding 150V.
- RoHS Compliant



Black PVC Insulation Jacket

PATH LIGHTING ACCESSORIES



Cat No.:

LA-FMS21-BZ:

21" Solid brass fixture mounting stem Antique bronze finish

LA-T-BZ

Fixture mounting "T" attachment

A-90-B7:

Fixture mounting 90° elbow attachment


Sample path light assembly shown with Westgate model LD-006-BZ (not included). Order your choice of fixture(s) separately. Use with plastic spikes included with 12V fixtures; or, order your choice of ground or surface mounting.









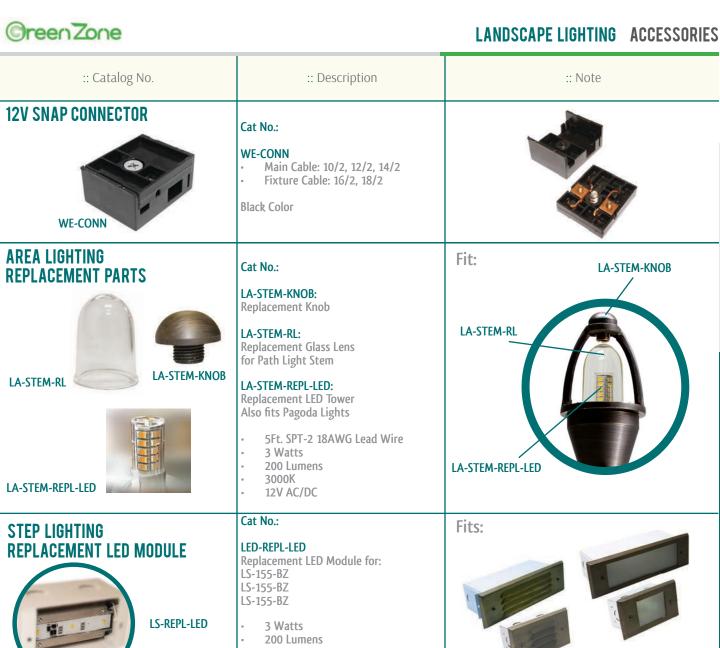



- 3000K
- 12V AC/DC
- **Built-in Driver**

PAGODA LIGHTS REPLACEMENT GLASS



AA-145-RG AA-146-RG AA-147-RG

Cat No.:

AA-145-RG:

Replacement Glass for 2-Tier Pagodas

AA-146-RG:

Replacement Glass for 3-Tier Pagodas

AA-147-RG:

Replacement Glass for 4-Tier Pagodas







